
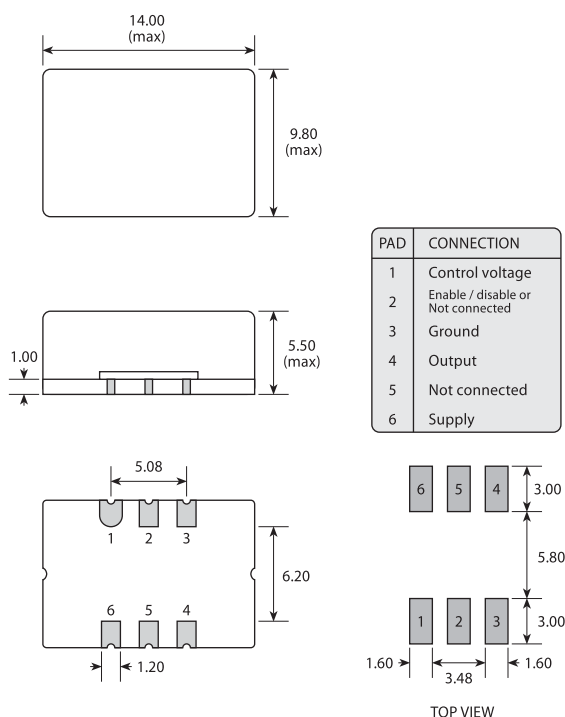


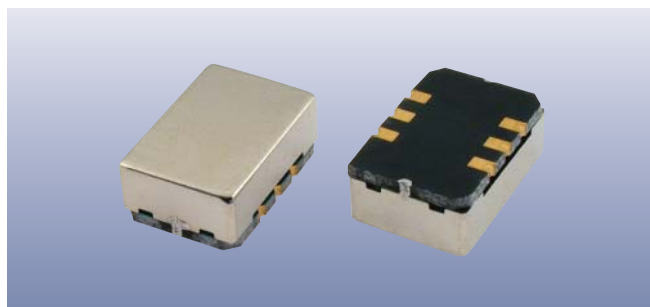

Features

- CMOS compatible output
- Low jitter and fast rise / fall
- Popular telecomms package layout
- Enable / disable tristate function

Enable / Disable Function

Input (pad 2)	Output (pad 4)
Open	Active
'1' level V_{IH}	Active
'0' level V_{IL}	High Impedance

Specifications

GVXO-32L: +3.3V supply

GVXO-32S: +5.0V supply

Parameters	Variant		Option Codes
	L	S	
Frequency range: 52.0 ~ 160MHz	■	■	
Voltage control (V_{CTL}): +1.65V $\pm$ 1.5V, 10% linearity +2.5V $\pm$ 2.0V, 10% linearity	■	■	
Frequency pullability: $\pm$ 80ppm min $\pm$ 100ppm min Other	■ □	■ □	specify
Frequency stability*: $\pm$ 50ppm max Other	■ □	■ □	specify
Operating temperature range: -10 to +70°C	■	■	
Storage temperature range: -40 to +85°C	■	■	
Supply voltage (V_{DD}): +3.3V ($\pm$ 5%) +5.0V ($\pm$ 5%)	■	■	
Supply current (mA max):	60	80	
Driving ability: 15pF CMOS	■	■	
Logic levels: '0' level = 10% V_{DD} max '1' level = 90% V_{DD} min	■	■	
Waveform symmetry: 40:60 max @ 50% V_{DD}	■	■	
Start up time: 10ms max	■	■	
Rise / fall time: 3ns max (20% ~ 80% V_{DD})	■	■	
Enable / disable function: Tristate (control via pad 2) None (pad 2 NC)	■ □	■ □	N
Soldering condition: Reflow, 240°C max	■	■	

■ Standard. □ Optional - Please specify required code(s) when ordering

* Frequency stability is inclusive of calibration @ 25°C, operating temperature range, supply voltage change, load change and ageing, with V_{CTL} = 50% V_{DD}

Ordering Information

Product name + variant + option codes (if any) + frequency
eg: **GVXO-32L 77.760MHz** 3.3V, $\pm$ 80ppm pullability, with E/D
GVXO-32S/N 155.520MHz 5.0V, $\pm$ 100ppm pullability, no E/D
Option code X (eg GVXO-32S/X) denotes a combination of values not listed above.

- Available on T&R - 1k pcs per reel. Refer to our website for details.
- Some combinations of stability/pullability are not available