


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

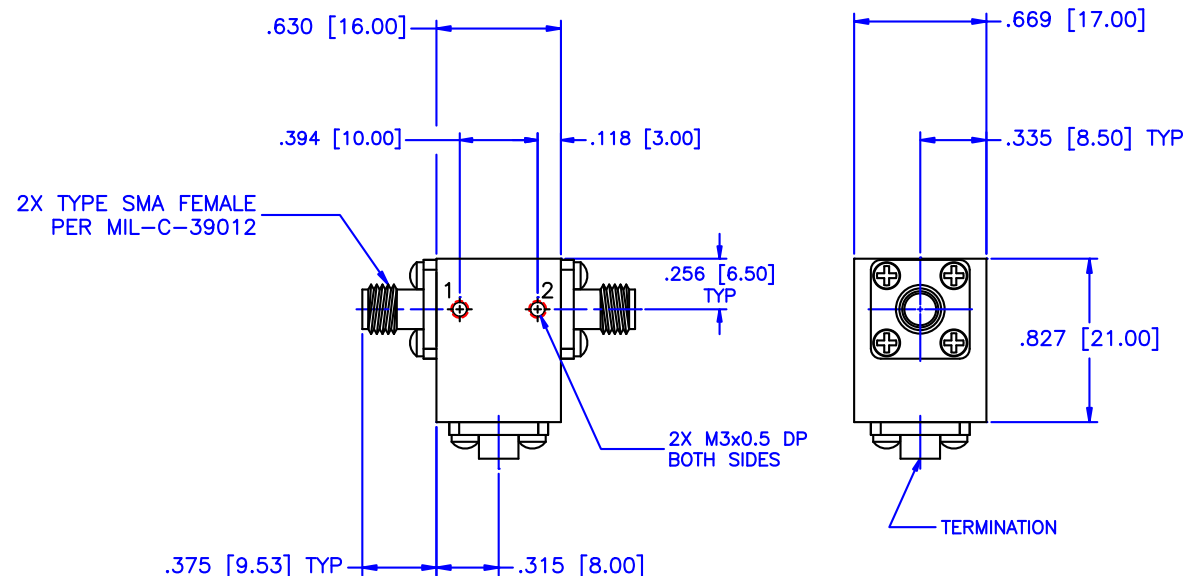

SPECIFICATIONS:

Frequency Range: 13.75–14.50 GHz
 Isolation: 18dB Min.
 Insertion loss: 0.5dB Max.
 VSWR: 1.35:1 Max.
 Operating Temperature: –54°C to +85°C
 Power Avg: 2 Watts
 Power Peak: 50 Watts

MATERIAL:		 MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
				SHEET: N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: COAXIAL ISOLATOR			
		PART NO. IS-64			
DRAWN: Paiboon Luekhamhan		DATE: 09-20-2010		CAGE CODE: 0D2L5	
APPROVED: T. Nguyen		DATE: 09-20-2010		SIZE: N/A REV: N/A DO NOT SCALE THE DRAWING	
		DWG NO. 84995			