


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

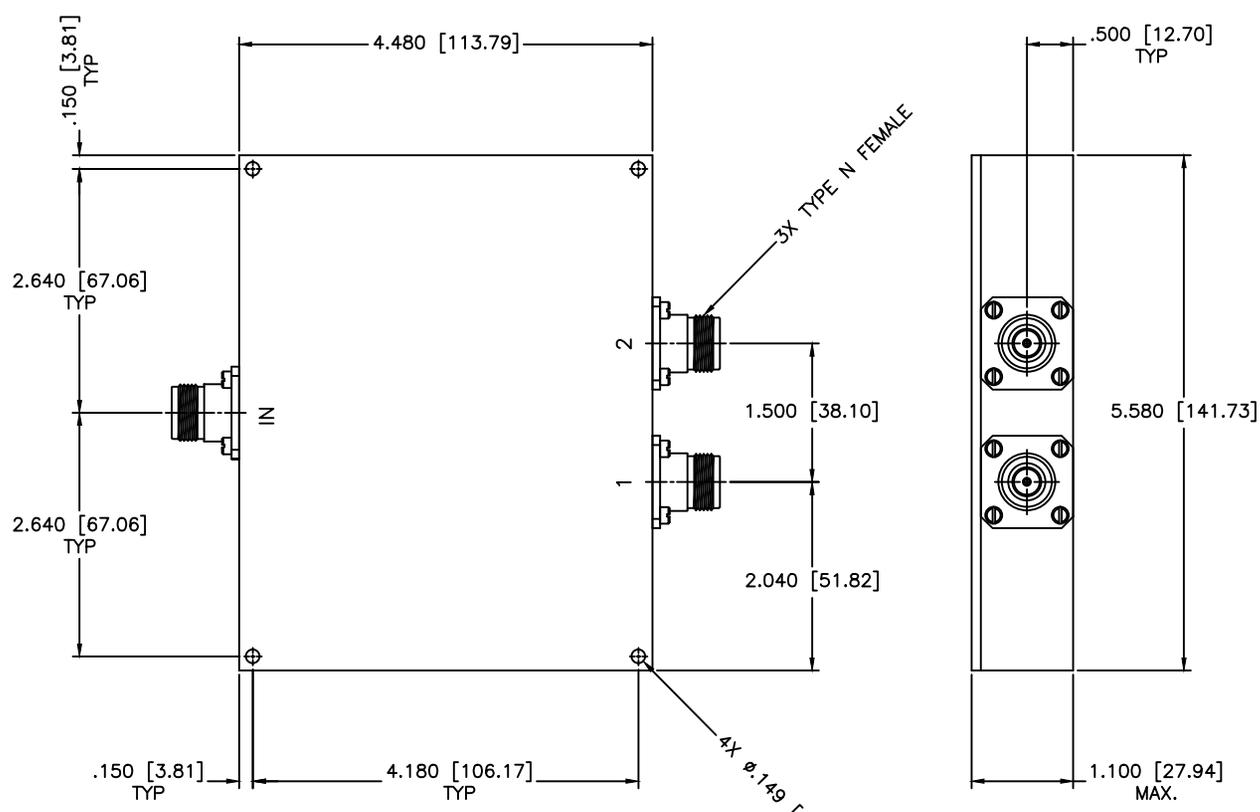

SPECIFICATIONS

Frequency Range: 100–200 MHz
 Insertion Loss: 0.30dB Max.
 Isolation: 22dB Min.
 VSWR: 1.30:1 Max.
 Power: 200 W CW
 Amplitude Balance: ± 0.10 dB Max.
 Phase Balance: ± 1 Deg. Max.

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.02 \pm 0.015$ ANGLE: $\pm 1/2^\circ$			DRAWING TITLE: 2-WAY MICROSTRIP POWER DIVIDER/COMBINER		SHEET: N/A
DRAWING: Paiboon Luekhamhan		DATE: 06-22-2011		PART NO.: PM2-5-200/NF	
APPROVED: T. Nguyen		DATE: 06-22-2011		CAGE CODE: OD2L5	SIZE: C
THIRD ANGLE PROJECTION		REV: N/A		DWG. NO.: 85730	
				DO NOT SCALE THE DRAWING	