



DECADES AHEAD[®]
high power RF devices

Werlatone[®], Inc.

17 Jon Barrett Road Patterson, New York 12563
 T (845) 278 2220 www.werlatone.com
 F (845) 278 3440 sales@werlatone.com

4-Way Combiner/Divider

Model D9649

Frequency: 20 - 4000 MHz

Power: 50 W CW





Insertion Loss: 1.5 dB Max.

VSWR: 1.70:1 Max.

Isolation: 12 dB Min.

Phase Balance: $\pm 12^\circ$ Max.

Amplitude Balance: 1.0 dB Max.

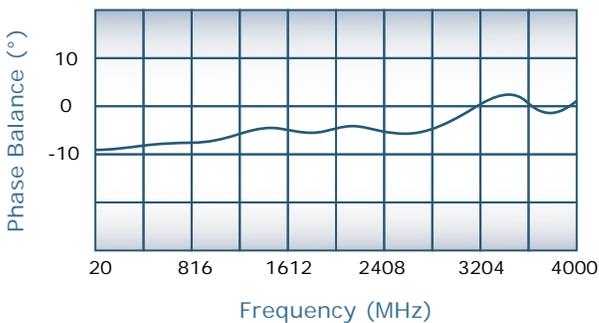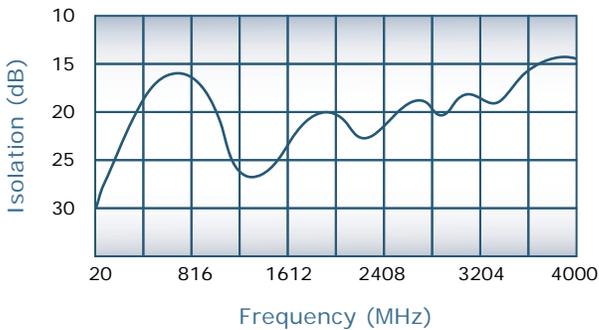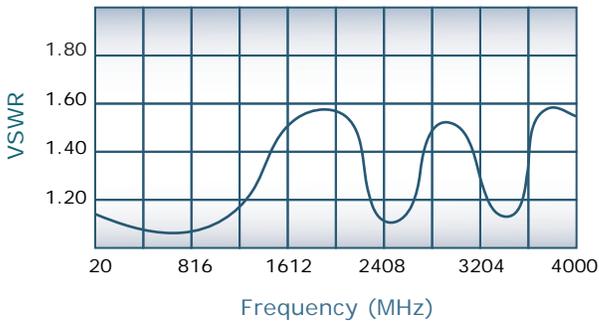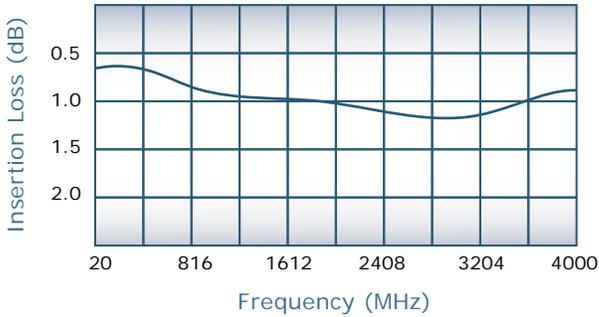

Notes

- All specifications guaranteed
- Test data provided with each unit shipped
- Alternate connector configurations upon request
- Operating Temperature: -55°C to +75°C

Connector Configurations

Model	J1 (Sum Port)	J2-J5 (Input/Output)
D9649-102	SMA	SMA

