


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

SPECIFICATIONS

Frequency Range: 0.5–2 GHz
VSWR In/Out: 1.45:1/1.30:1 Max.
Insertion Loss: 1.3dB Max.
Isolation: 18dB Min.
Amplitude Balance: ± 0.3 dB Max.
Phase Balance: ± 6 Deg. Max.

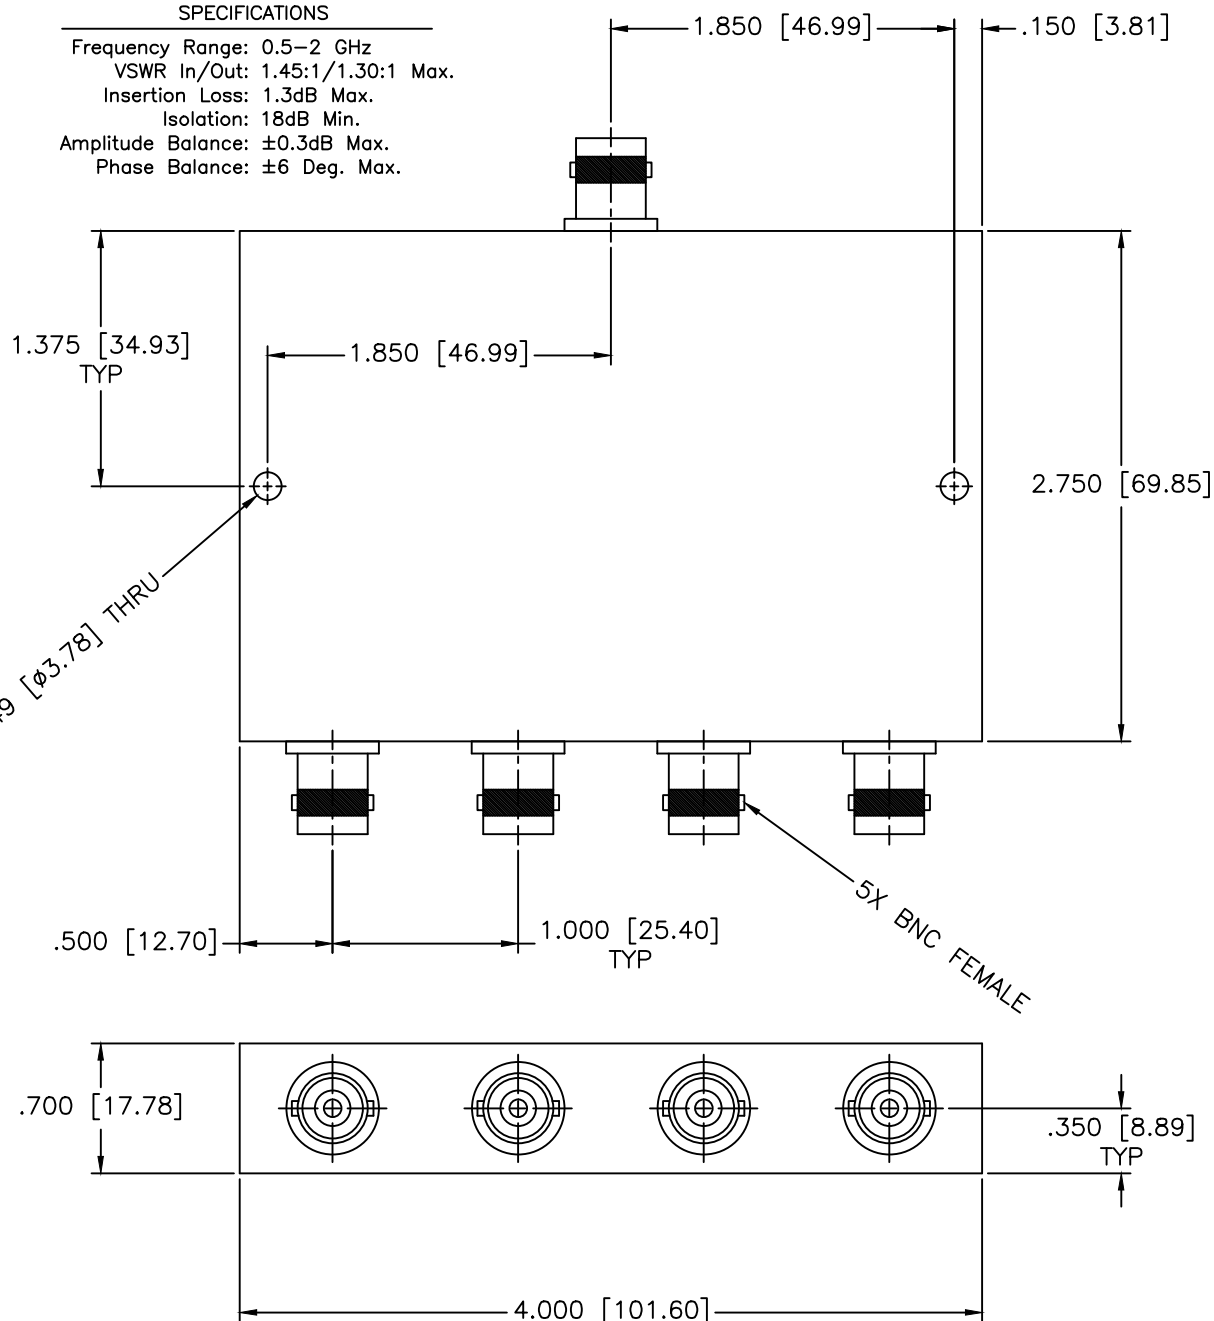

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
					SHEET:	N/A
DRAWN: Paiboon Luekhamhan DATE: 10-12-2006		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .02 \pm .008$ ANGLE: $\pm 1/2^\circ$	DRAWING TITLE:			
			4-WAY POWER DIVIDER			
APPROVED: T. Nguyen DATE: 10-12-2006		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO.			
			PS4-3/BF			
			CAGE CODE:	SIZE:	REV:	DWG NO.
			OD2L5	A	A	82684
DO NOT SCALE THE DRAWING						