



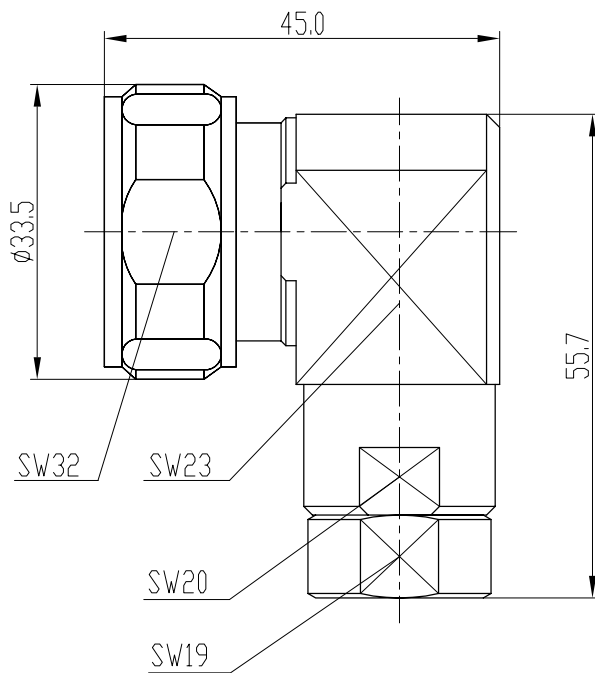

剥线尺寸
stripping dimension

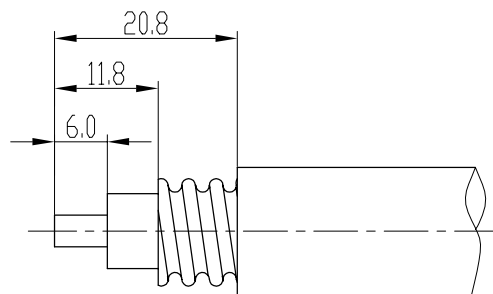

产品型号 type	配接电缆 cable type	备注 remark
L29-JW533	FSJ4-50(HELIAX ANDREW)	内导体免焊 free solder for center contact

Electrical Characteristics:

- Characteristic Impedance: 50 Ω
- Frequency range: DC~6Ghz
- Contact resistance
Center conductor: $\leq 1.0 \text{ m}\Omega$
Out conductor: $\leq 0.5 \text{ m}\Omega$
- Insulation resistance: $\geq 10000 \text{ M}\Omega$
- Insulator withstanding: 4000V
- VSWR: ≤ 1.5
- Durability: 500cycles

主要性能指标:

- 特性阻抗: 50 Ω
- 频率范围: DC~6Ghz
- 接触电阻:
中心导体: $\leq 1.0 \text{ m}\Omega$
外导体: $\leq 0.5 \text{ m}\Omega$
- 绝缘电阻: $\geq 10000 \text{ M}\Omega$
- 介质耐压: 4000V
- 电压驻波比: ≤ 1.5
- 插拔次数: 500次

Application: IEC 60169-4

执行标准: IEC 60169-4

Material & Finishing

- Center conductor:
brass or phosphor bronze, silver plated
- Bodies: brass, silver plated
- Insulators: PTFE
- Gasket: silicone rubber

材料和镀层

- 中心导体:
黄铜或锡磷青铜, 镀银
- 壳体: 黄铜, 镀银
- 绝缘子: 聚四氟乙烯
- 密封圈: 硅橡胶

		SCALE
		1.5:1
	NAME	DATE
DRAWN		
CHECKED		
APPROVED		

L29-JW533
RF COAXIAL CONNECTOR

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE mm, TOLERANCES ARE
FRACTIONS DECIMALS ANGLES
.X $\pm$.15 $\pm 1^\circ$
.XX $\pm$.05
.XXX $\pm$

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO., LTD.