






Standards
NF C 96-315
MIL-DTL-39030

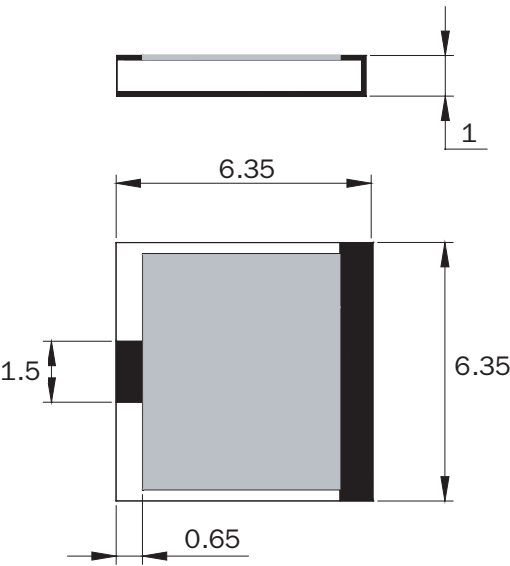

Substrate	AlN
Resistive film	Thick film
Protection film	Epoxy
Contacts finition	Silver over Nickel barrier



Dimensions in mm

P/N	Frequency (GHz)	Power (W)	Impedance ($\Omega \pm 5\%$)	Max VSWR
45-0005Y	4	60	50	1.25

mm	inch
0.65	0.026
1	0.039
1.5	0.059
6.35	0.250



Available on Tap and Reel Packaging

