

TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Product Specifications Approval Sheet

Product Description: SAW Filter 1457 MHz SMD 3.0X3.0 mm

TST Part No.: TA1048A

Customer Part No.: _____


Customer signature required

Company: _____

Division: _____

Approved by : _____

Date: _____

Checked by: _____ Bob Chau 

Approved by: _____ Francis Chen 

Date: _____ 2, 21, 2011

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes.



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,

Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com

Web: www.taisaw.com

SAW Filter 1457 MHz

MODEL NO.:TA1048A

REV. NO.:3

A. MAXIMUM RATING:

1. Input Power Level: +10 dBm
2. DC Voltage : 3V
3. Operating Temperature: 0°C to +85°C
4. Storage Temperature: -40°C to +85°C


RoHS Compliant
Lead free
Lead-free soldering

B. ELECTRICAL CHARACTERISTICS:


Item	Unit	Min.	Type.	Max.	Note
Center Frequency Fc	MHz	-	1457	-	-
Insertion Loss (1454.5~1459.5 MHz) IL	dB	-	2.7	4	-
Insertion Loss at Center Frequency ILc	dB	-	2.7	3.3	-
Amplitude Ripple (1454.5~1459.5 MHz)	dB	-	0.1	1	-
Bandwidth @ -1 dB	MHz	5	38	-	-
VSWR (1454.5~1459.5 MHz)		-	1.6	2	-
Attenuation (Reference level from 0 dB)					
DC ~ 100 MHz	dB	60	72	-	-
100 ~ 1395 MHz	dB	40	49	-	-
1395 ~ 1401 MHz	dB	30	49	-	-
1513 ~ 1519 MHz	dB	30	45	-	-
2852 ~ 2976 MHz	dB	40	45	-	-
4309 ~ 4433 MHz	dB	8	16	-	-

C. MEASUREMENT CIRCUIT:

HP Network analyzer

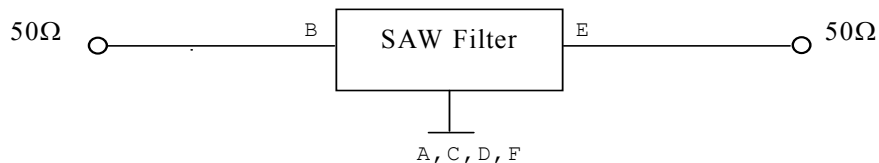


D.OUTLINE DRAWING:

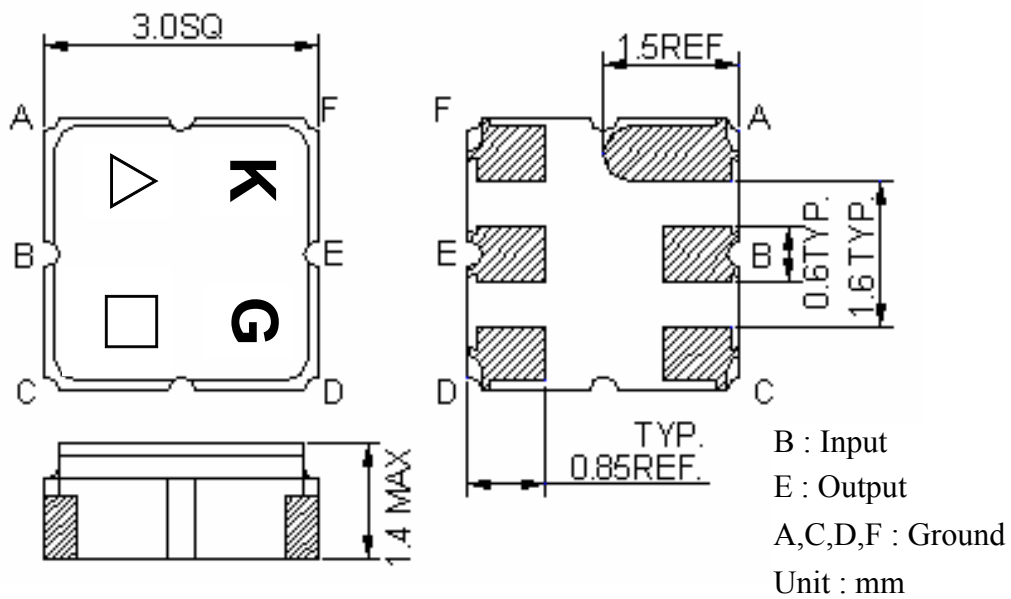



△ : Year Code (2009->9, 2010->0,..., 2018->8)

□ : Date Code (W01->A, W02->B,...,W27->a,...,W52->z)

E. PCB Footprint:

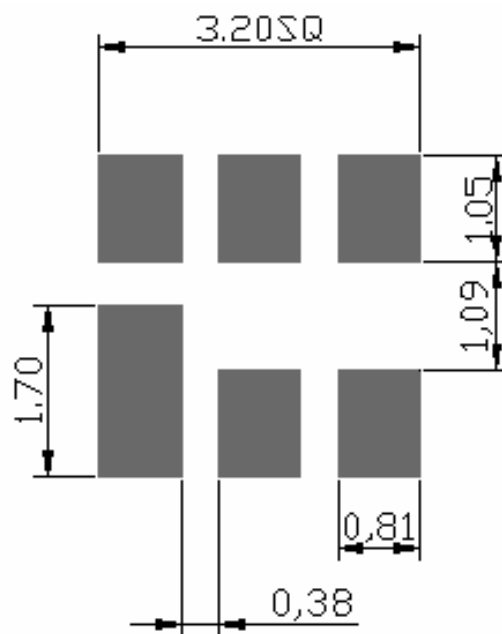


F. Frequency Characteristics :

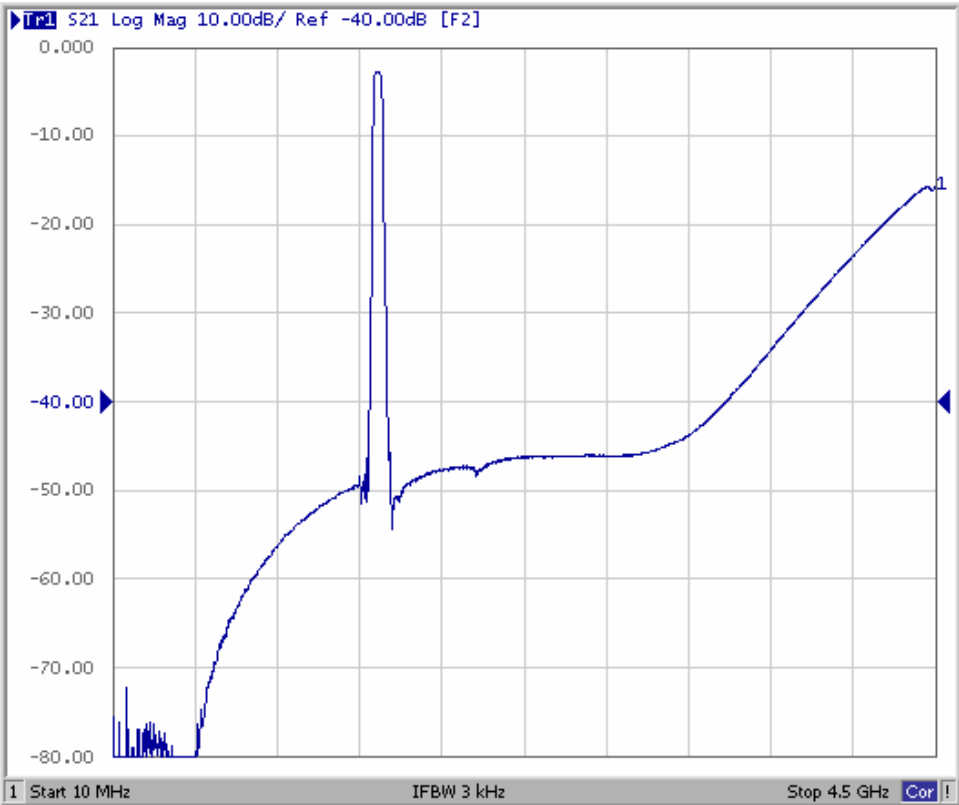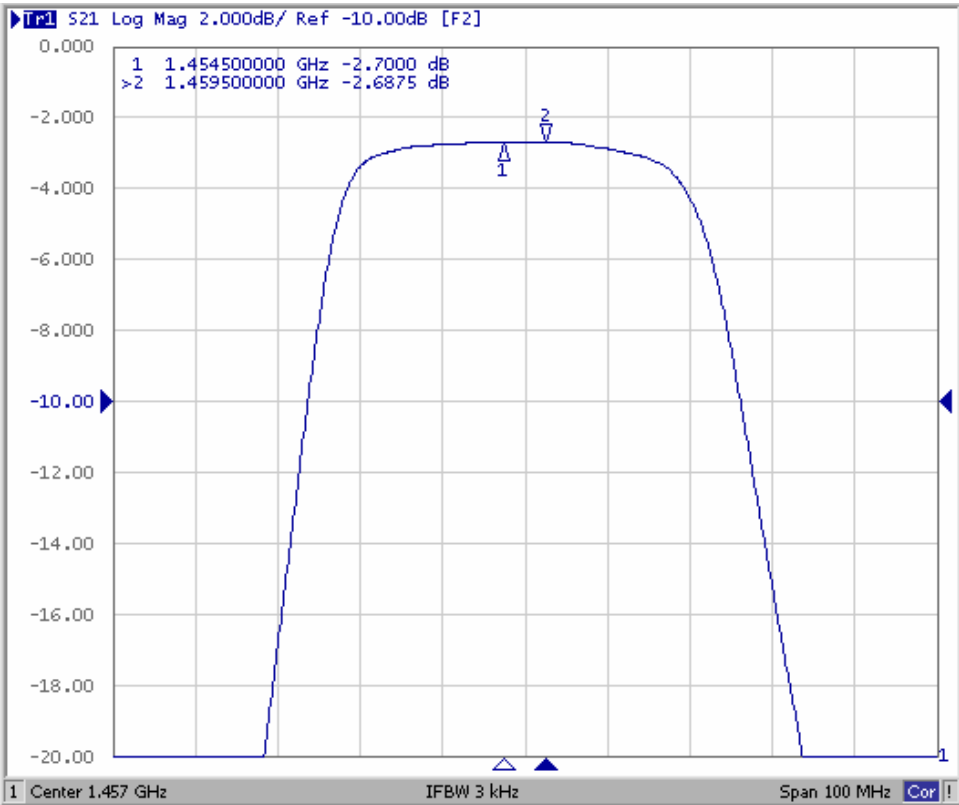


Reflection Functions :

S11

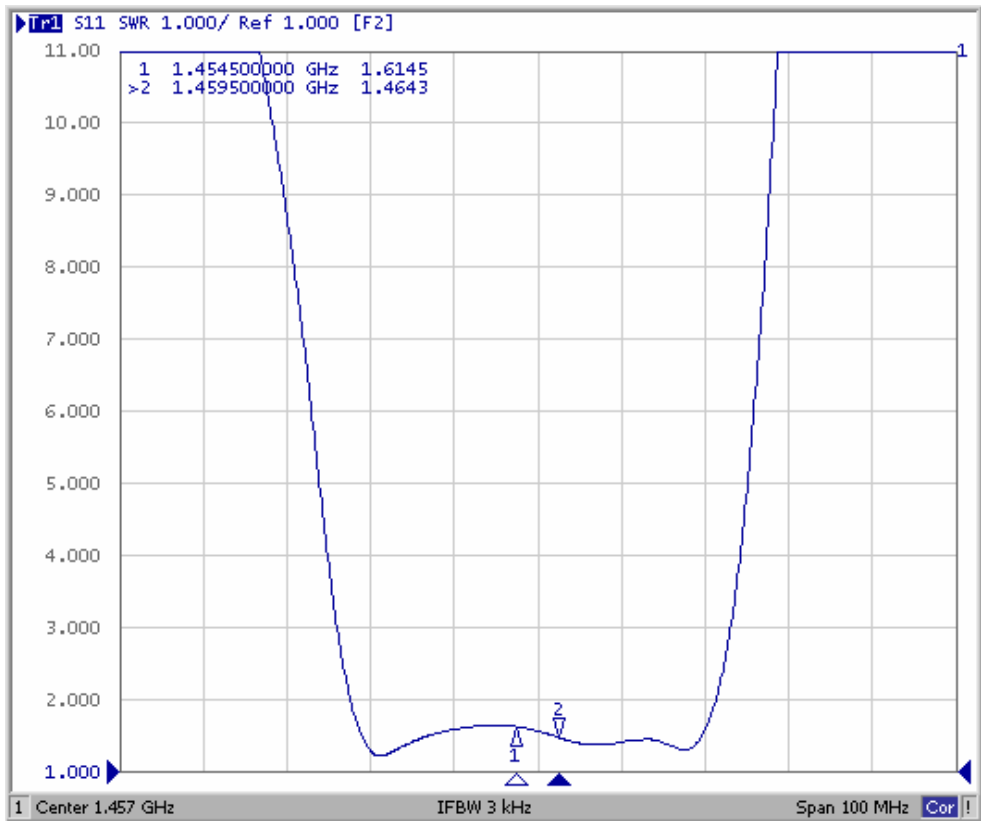


S22

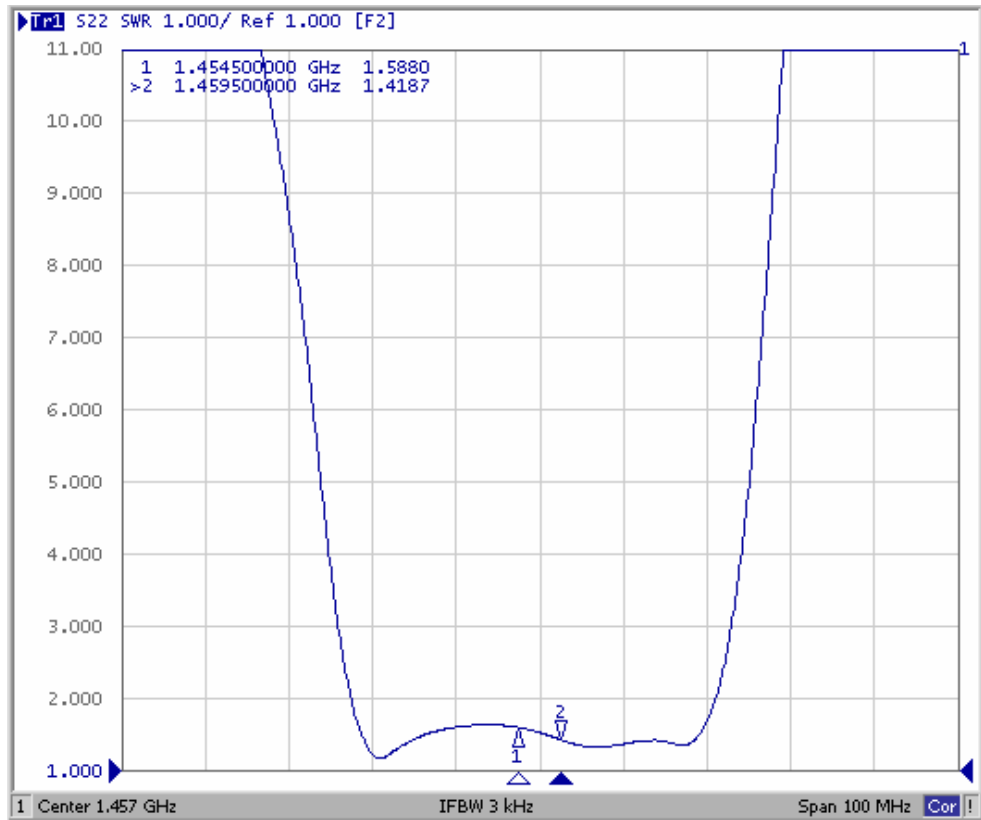


G. PACKING:

1. REEL DIMENSION

(Reel Count : 7''=1000 ; 13''=3000)

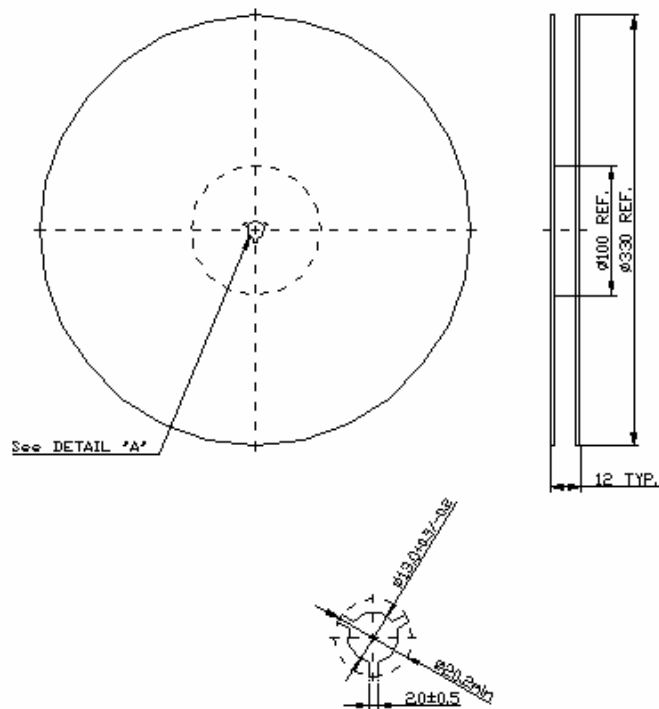

2.TAPE DIMENSION

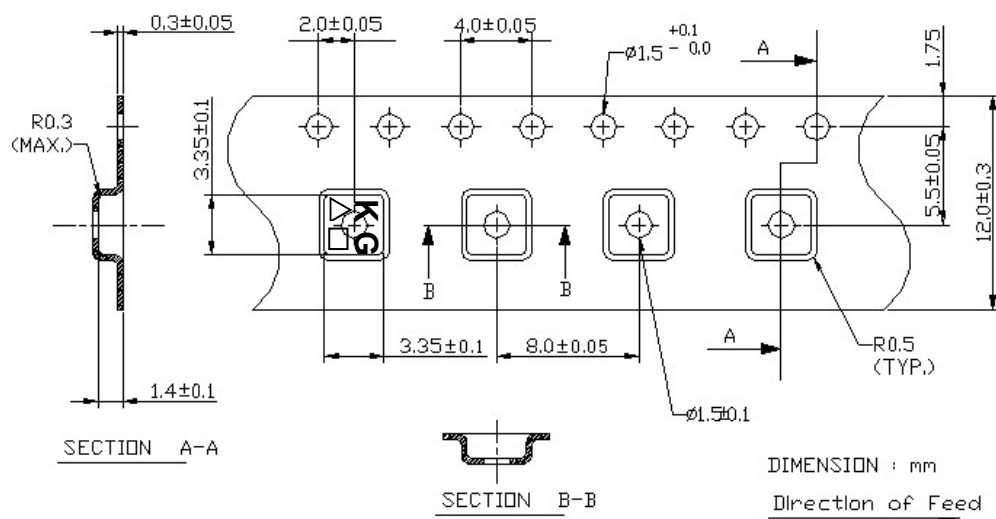

H. RECOMMENDED REFLOW PROFILE :

