



3 kW For integration



Standards
NF C 96-315
MIL-DTL-39030



Impedance	50 $\Omega \pm 5\%$
Frequency	DC - 1 GHz
Max VSWR	≤ 1.30 at 1 GHz
Temperature range	-55 to + 150°C
Material	Cu-Al
Average power @ 25°C	3 kW
Weight	13 kg

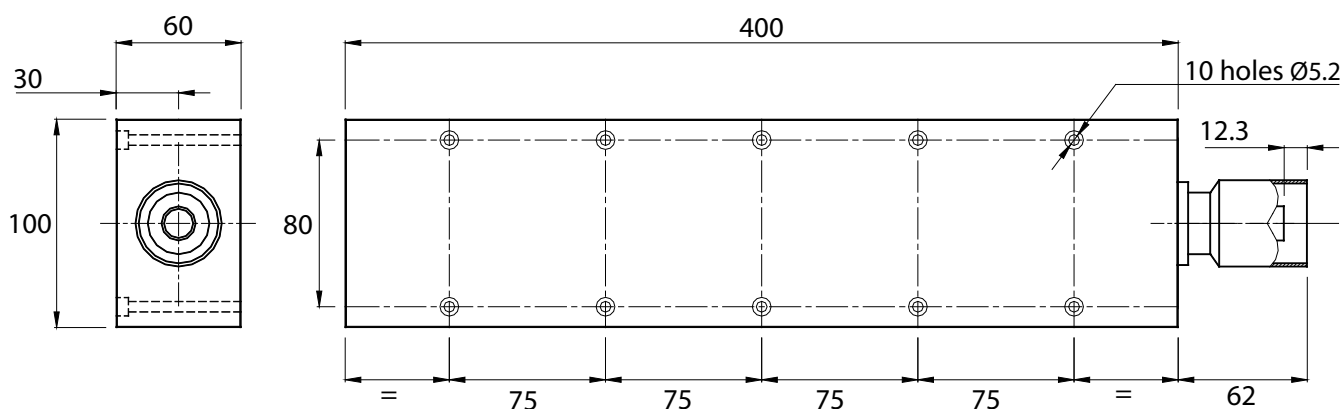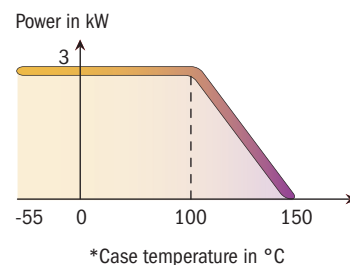

Dimensions in mm

P/N	Connector
17-0572	EIA 1.5/8"

others connectors on request

Option	VSWR ≤ 1.05 470 to 860 MHz for digital applications
--------	--

Designed for water cooled or forced air heat exchanger