


Surface Mount Frequency Mixer

Level 4 (LO Power +4 dBm) 2000 to 3000 MHz

MBA-25L+



CASE STYLE: SM2

PRICE: \$6.95 ea. QTY (10-49)

Maximum Ratings

Operating Temperature -40°C to 85°C

Storage Temperature -55°C to 100°C

RF Power 50mW

IF Current 40mA

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

LO 10

RF 5

IF 3

GROUND 1,2,4,6,7,8,9

Features

- excellent temperature stability
- excellent performance repeatability
- leads with strain relief
- very low cost
- ultra low height, 0.07"
- aqueous washable
- protected by US Patent 5,534,830

Applications

- PCN/PCS/wideband CDMA
- satellite communication
- PCMCIA

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications


FREQUENCY (MHz)		CONVERSION LOSS (dB)			LO-RF ISOLATION (dB)		LO-IF ISOLATION (dB)		IP3 at center band (dBm)
LO/RF	IF	$\bar{X}$	σ	Max.	Typ.	Min.	Typ.	Min.	
2000-3000	DC-600	6.2	0.15	8.6	28	18	15	7	10

1 dB COMP.: 0 dBm typ.


Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO					
		LO +4dBm	LO +4dBm	LO +4dBm	LO +4dBm	LO +4dBm
2000.00	2030.00	6.98	26.60	11.00	2.84	1.80
2030.00	2060.00	6.83	27.10	11.30	2.68	1.80
2100.00	2130.00	6.63	28.20	12.70	2.30	1.66
2162.50	2192.50	6.42	28.20	13.70	2.14	1.58
2200.00	2230.00	6.51	28.00	14.20	2.04	1.60
2300.00	2330.00	6.37	26.50	15.30	1.84	1.54
2400.00	2430.00	6.34	24.70	16.90	1.65	1.52
2427.50	2457.50	6.30	24.30	17.40	1.58	1.50
2500.00	2530.00	6.33	22.60	18.60	1.41	1.43
2560.00	2590.00	6.16	22.40	19.30	1.27	1.38
2600.00	2630.00	6.20	22.10	19.40	1.17	1.33
2692.50	2722.50	6.33	22.10	19.30	1.07	1.33
2700.00	2730.00	6.27	22.10	19.30	1.08	1.33
2800.00	2830.00	6.41	22.10	19.20	1.24	1.28
2825.00	2855.00	6.38	22.10	19.30	1.30	1.27
2900.00	2930.00	6.35	22.60	19.00	1.43	1.20
2957.50	2987.50	6.36	23.40	18.50	1.53	1.14
3000.00	3030.00	6.35	23.80	18.00	1.57	1.11
3090.00	3120.00	6.47	24.60	16.60	1.71	1.04
3200.00	3230.00	6.66	25.20	14.80	1.82	1.07


Electrical Schematic

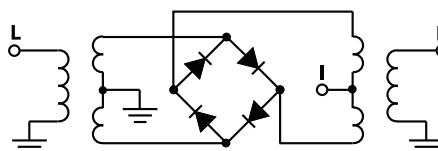

Outline Drawing

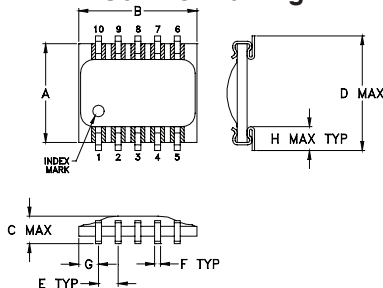

PCB Land Pattern




Suggested Layout,
Tolerance to be within ±.002
ADJACENT GROUND PINS SHALL BE CONNECTED
TO EACH OTHER AND TO GROUND PAD

Outline Dimensions (inch)

A	B	C	D	E	F	G	H	
.250	.300	.095	.290	.050	.015	.050	.060	
6.35	7.62	2.41	7.37	1.27	0.38	1.27	1.52	
J	K	L	M	N	P	Q	R	wt
.030	.080	.300	.100	.020	.015	.070	.014	grams
0.76	2.03	7.62	2.54	0.51	0.38	1.78	0.36	0.3

Demo Board MCL P/N: TB-99 Suggested PCB Layout (PL-066)

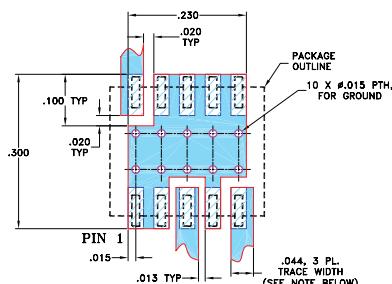

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK






Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 35166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. F
M143449
MBA-25L+
EE-7756/3
130926
Page 1 of 2

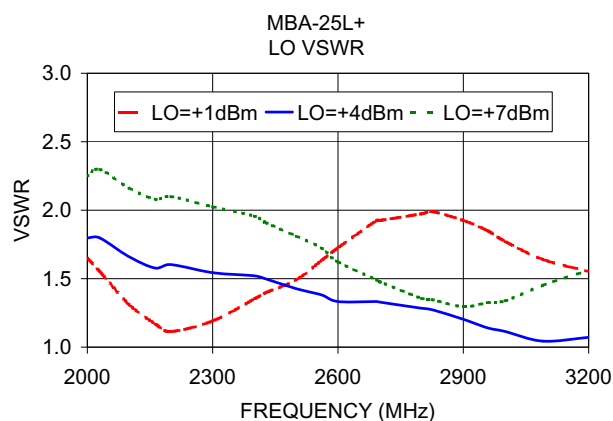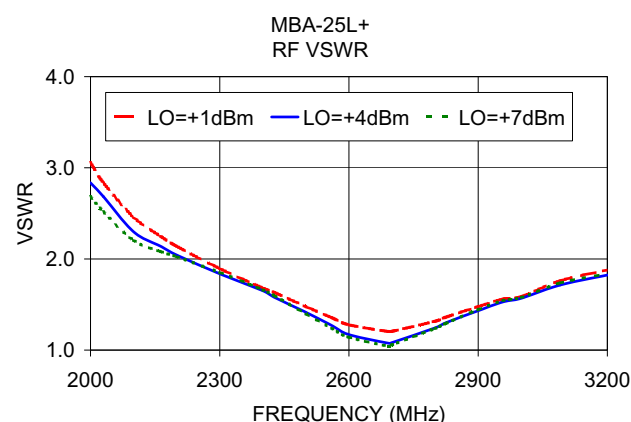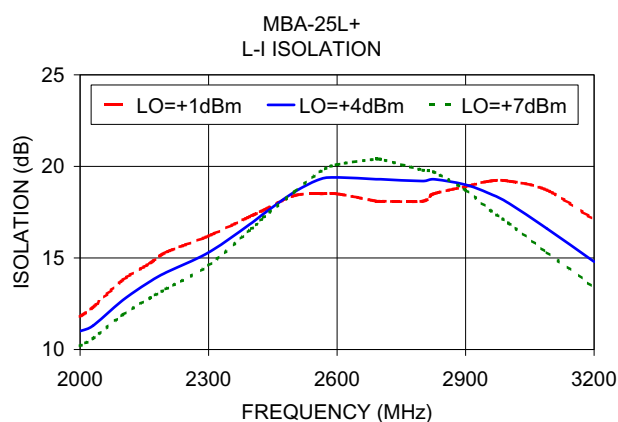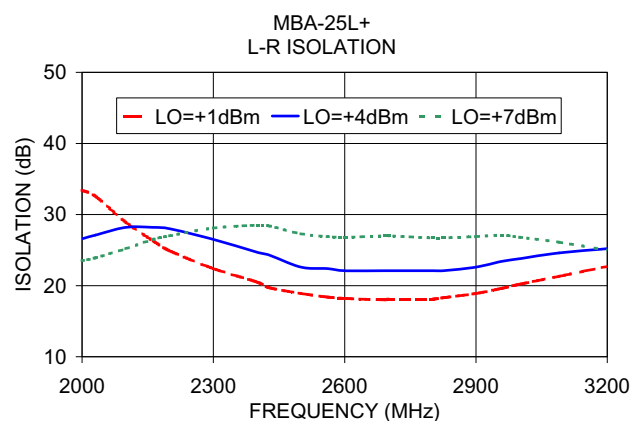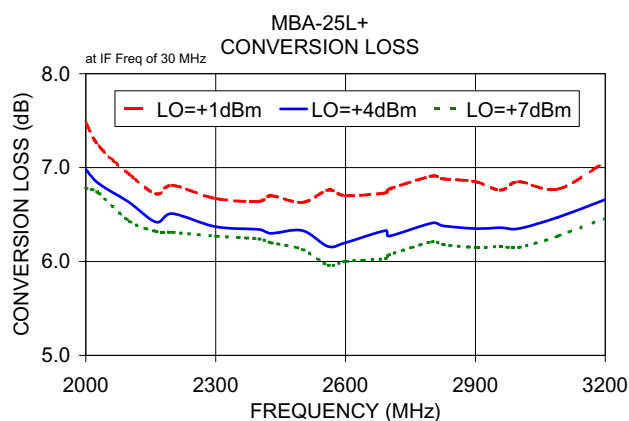

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

