
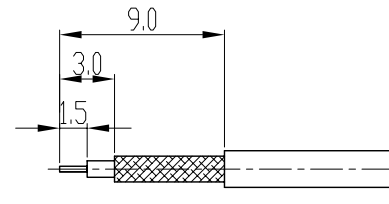


剥线尺寸
stripping dimension

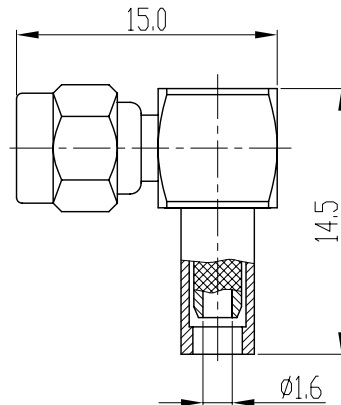

产品型号 type	电缆型号 cable type
SMC-KW3	SFF-50-1.5-1、RG316/U

Electrical Characteristics:

1. Characteristic Impedance: $50\ \Omega$
2. Frequency range: DC~4Ghz
3. Contact resistance
Center conductor: $\leq 6.0\ m\Omega$
Out conductor: $\leq 1.0\ m\Omega$
4. Insulation resistance: $\geq 1000M\Omega$
5. Insulator withstanding: 750V
6. VSWR: ≤ 1.4
7. Durability: 5000cycles

Application: MIL-C-39012/73A

Material&Finishing

1. Center contact:
Female: beryllium copper, gold plated
2. Bodies: brass, gold plated
3. Crimp ferrule: copper, nickel plated
4. Insulators: PTFE


主要性能指标:

1. 特性阻抗: $50\ \Omega$
2. 频率范围: DC~4Ghz
3. 接触电阻:
中心导体: $\leq 6.0\ m\Omega$
外导体: $\leq 1.0\ m\Omega$
4. 绝缘电阻: $\geq 1000M\Omega$
5. 介质耐压: 750V
6. 电压驻波比: ≤ 1.4
7. 插拔次数: 5000次

执行标准: MIL-C-39012/73A

材料和镀层

1. 中心接触件:
插孔: 铍青铜, 镀金
2. 壳体: 黄铜, 镀金
3. 线夹: 黄铜, 镀镍
4. 绝缘子: 聚四氟乙烯

		SCALE 2.5:1	SMC-KW3 RF COAXIAL CONNECTOR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE <table border="1"> <thead> <tr> <th>FRACTIONS</th> <th>DECIMALS</th> <th>ANGLES</th> </tr> </thead> <tbody> <tr> <td>.X±</td> <td>.15</td> <td>±1°</td> </tr> <tr> <td>.XX±</td> <td>.05</td> <td></td> </tr> <tr> <td>.XXX±</td> <td></td> <td></td> </tr> </tbody> </table>	FRACTIONS	DECIMALS	ANGLES	.X±	.15	±1°	.XX±	.05		.XXX±		
FRACTIONS	DECIMALS	ANGLES														
.X±	.15	±1°														
.XX±	.05															
.XXX±																
NAME	DATE															
DRAWN																
CHECKED																
APPROVED																

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO.,LTD.