



RF-LAMBDA

The power beyond expectations

RFC213M50M60W

500~600MHz 300W High Power Coaxial Circulator

Electrical Specifications:

Center Frequency Range: 500-600MHz

Bandwidth: 100MHz

Insertion Loss: 0.5dB

Isolation: 20dB

VSWR: 1.25



Temp. Operation: -20~+75°C

Temp. Storage: -40~+85°C

Average Power: 300W (CW)

Connector: N-F

* Customerization available upon request.

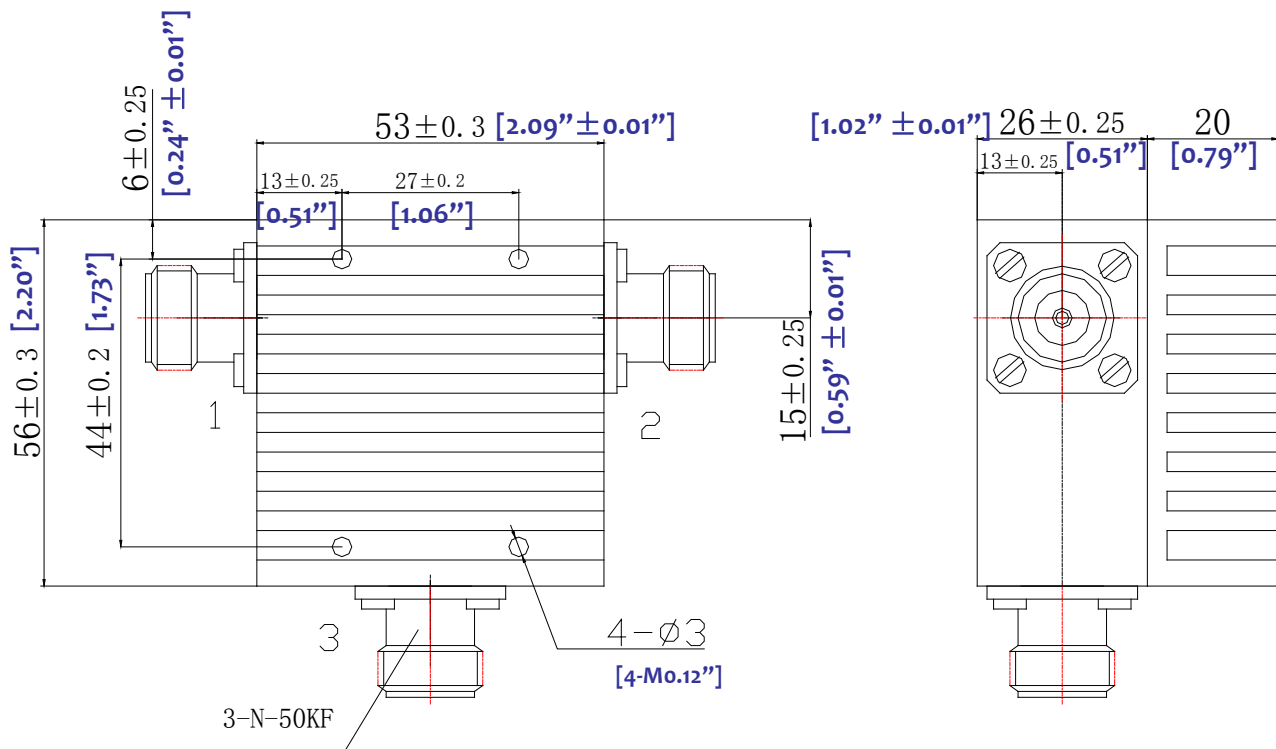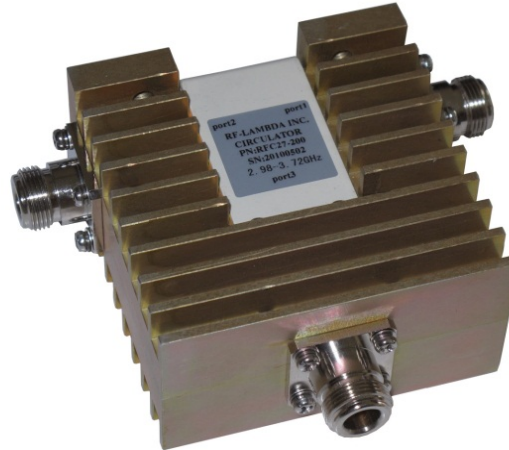

500~600MHz 300W High Power Coaxial Circulator