



Features

- For WiBro and WiMAX applications
- Usable bandwidth 10 MHz
- High attenuation
- Balanced operation
- Ceramic Surface Mount Package (SMP)
- Hermetic
- RoHS compliant (2002/95/EC), Pb-free 

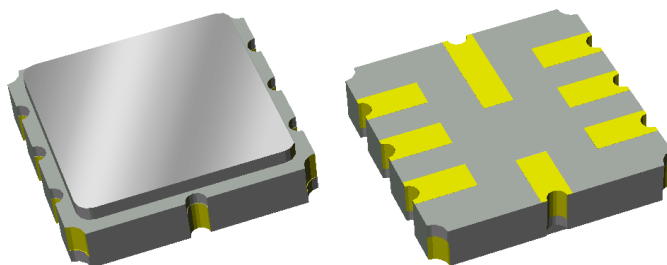

Package

Surface Mount 5.00 x 5.00 x 1.32 mm
SMP-20

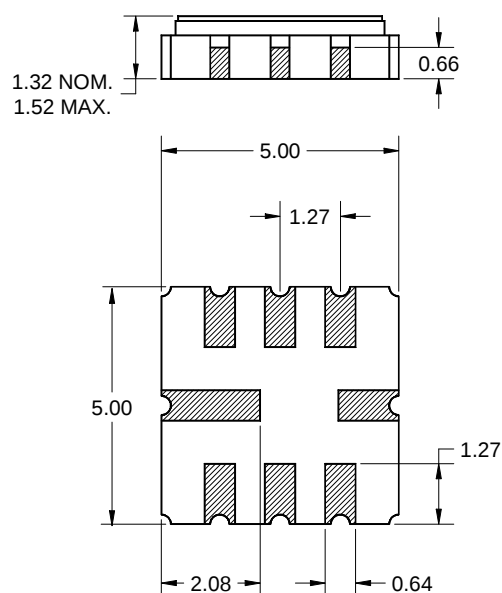


Dimensions shown are nominal in millimeters
 All tolerances are ± 0.15 mm except overall
 length and width $+0.15/-0.10$ mm

Body: Al_2O_3 ceramic
 Lid: Kovar, Ni plated
 Terminations: Au plating 0.5 - 1.0 μ m,
 over a 2 - 6 μ m Ni plating

Pin Configuration

Bottom View



Pin No.	Description
1	Input
2	Input return
5	Output
6	Output return
3,4,7,8	Case ground

Target Electrical Specifications ⁽¹⁾

Operating Temperature Range: ⁽²⁾ -20 to +60 °C


Parameter ⁽³⁾	Minimum	Typical	Maximum	Unit
Center Frequency	-	456	-	MHz
Minimum Insertion Loss 451 - 461 MHz	-	8.3	9.5	dB
Amplitude Variation 451 - 461 MHz	-	0.4	1.25	dB
30 dB Bandwidth ⁽⁴⁾	-	20.1	20.55	MHz
Relative Attenuation ⁽⁴⁾				
10 - 256 MHz	45	70	-	dB
256 - 360 MHz	40	65	-	dB
360 - 421 MHz ⁽⁵⁾	45	50	-	dB
421 - 440 MHz	37	40	-	dB
472.4 - 491 MHz	39	42	-	dB
491 - 552 MHz ⁽⁵⁾	45	50	-	dB
552 - 656 MHz	40	55	-	dB
656 - 946 MHz	45	60	-	dB
Absolute Group Delay at Center Frequency	-	0.43	0.45	μsec
Group Delay Variation 451 - 461 MHz	-	35	65	ns
Input/Output Return Loss 451 - 461 MHz	9	14	-	dB
Optimal Source Impedance (Balanced) ⁽⁶⁾	-	200	-	Ω
Optimal Load Impedance (Balanced) ⁽⁶⁾	-	200	-	Ω

Notes:

1. All specifications are based on TriQuint test circuit shown below
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
4. Referenced to minimum insertion loss
5. The rejection "floor" in specified ranges allows for 100KHz wide spurious responses at a max peak of 40dB below minimum insertion loss
6. This is the optimum impedance in order to achieve the performance shown

Test Circuit:

Actual matching values may vary due to PCB layout and parasitics

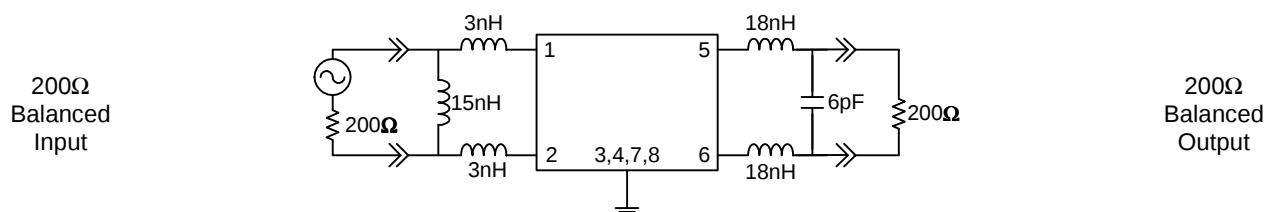

Target Electrical Specifications ⁽¹⁾

Operating Temperature Range: ⁽²⁾ -40 to +85 °C


Parameter ⁽³⁾	Minimum	Typical	Maximum	Unit
Center Frequency	-	456	-	MHz
Minimum Insertion Loss 451 - 461 MHz	-	8.3	9.75	dB
Amplitude Variation 451 - 461 MHz	-	0.4	1.25	dB
30 dB Bandwidth ⁽⁴⁾	-	20.1	20.6	MHz
Relative Attenuation ⁽⁴⁾				
10 - 256 MHz	45	70	-	dB
256 - 360 MHz	40	65	-	dB
360 - 421 MHz ⁽⁵⁾	45	50	-	dB
421 - 440 MHz	37	40	-	dB
472.4 - 491 MHz	38	42	-	dB
491 - 552 MHz ⁽⁵⁾	45	50	-	dB
552 - 656 MHz	40	55	-	dB
656 - 946 MHz	45	60	-	dB
Absolute Group Delay at Center Frequency	-	0.43	0.45	μsec
Group Delay Variation 451 - 461 MHz	-	35	70	ns
Input/Output Return Loss 451 - 461 MHz	8	14	-	dB
Optimal Source Impedance (Balanced) ⁽⁶⁾	-	200	-	Ω
Optimal Load Impedance (Balanced) ⁽⁶⁾	-	200	-	Ω

Notes:







1. All specifications are based on TriQuint test circuit shown below
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
4. Referenced to minimum insertion loss
5. The rejection "floor" in specified ranges allows for 100KHz wide spurious responses at a max peak of 40dB below minimum insertion loss
6. This is the optimum impedance in order to achieve the performance shown

Test Circuit:

Actual matching values may vary due to PCB layout and parasitics

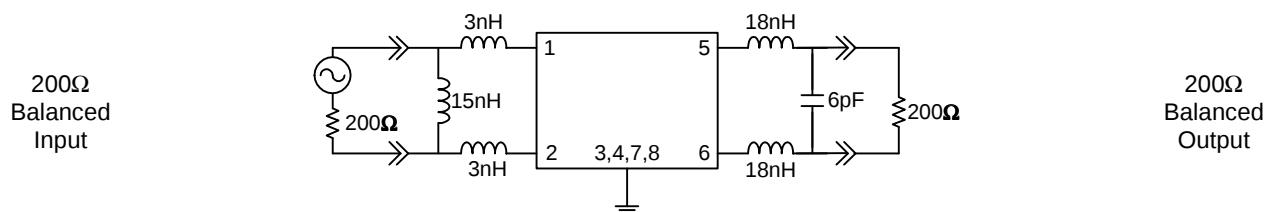


Typical Performance (at +25°C)

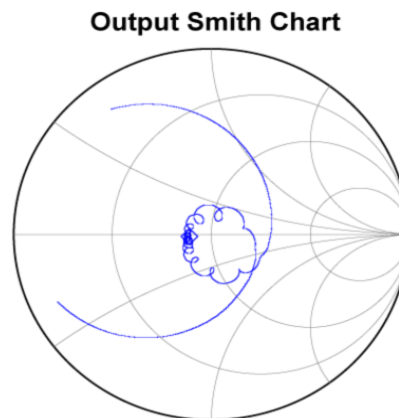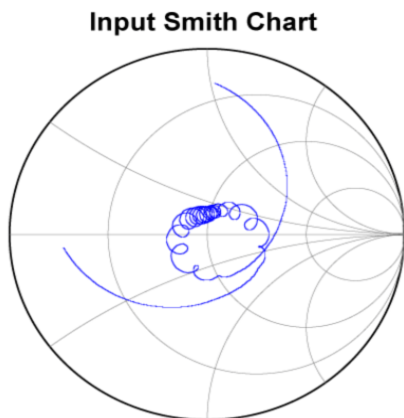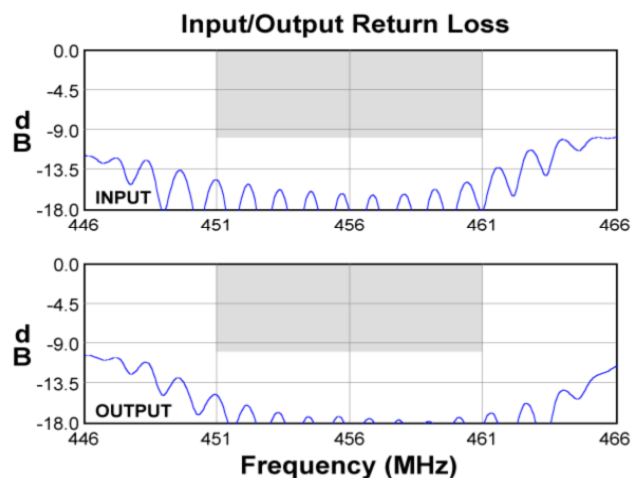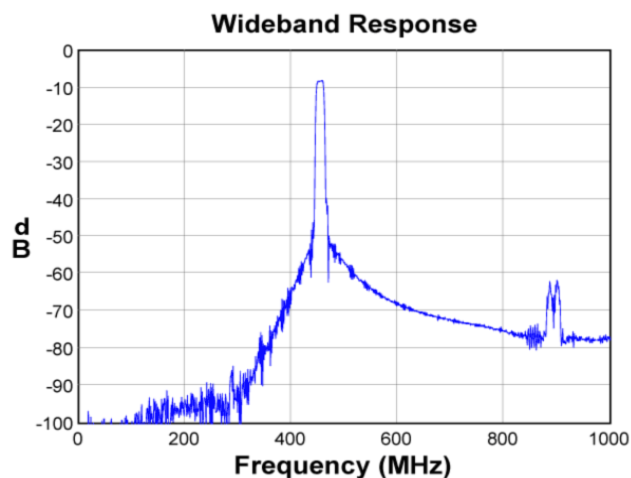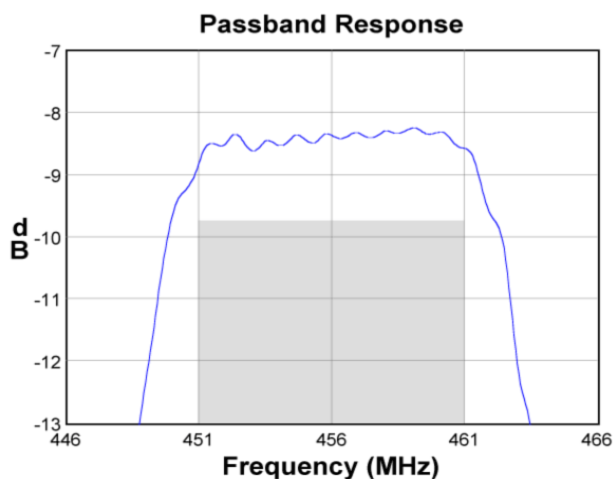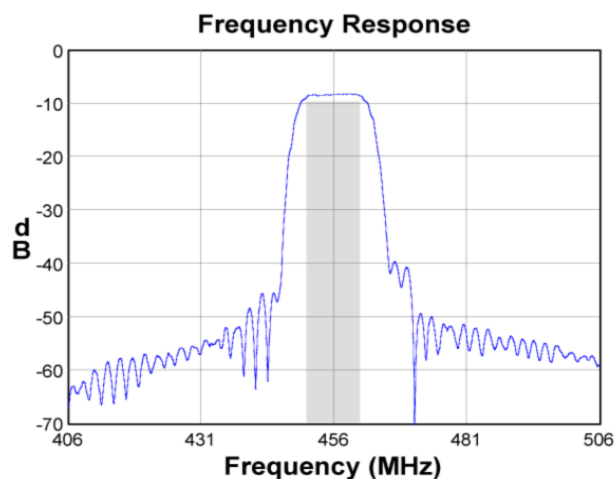


Matching Schematics

Actual matching values may vary due to PCB layout and parasitics

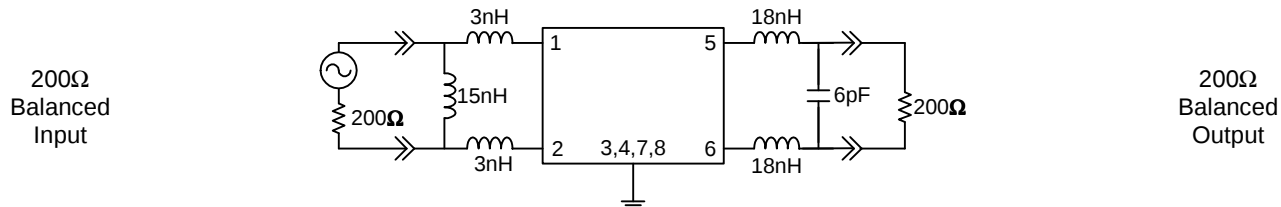


Marking

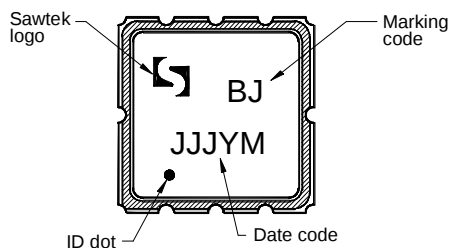



The date code consists of: JJJ = Julian day,
Y = last digit of year, M = manufacturing site code

PCB Footprint

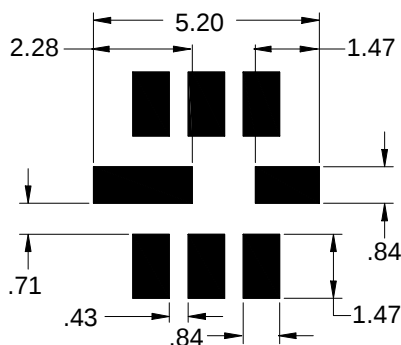

This footprint represents a recommendation only
Dimensions shown are nominal in millimeters

Tape and Reel

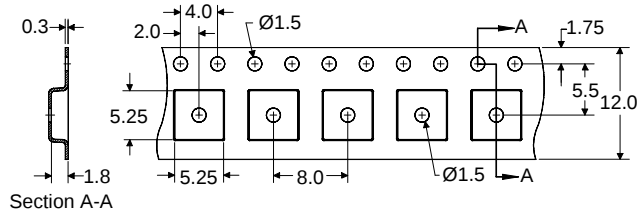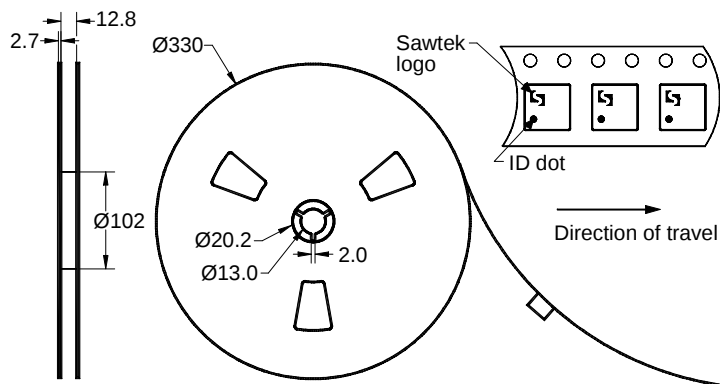

Dimensions shown are nominal in millimeters
Packaging quantity: 4000 units/reel

Maximum Ratings

Parameter	Symbol	Minimum	Maximum	Unit
Operating Temperature Range	T	-40	+85	°C
Storage Temperature Range	T _{stg}	-40	+85	°C

Important Notes

Warnings

- Electrostatic Sensitive Device (ESD) 
- Avoid ultrasonic exposure

RoHS Compliance

- This product complies with EU directive 2002/95/EC (RoHS) 

Solderability

- Compatible with JESD22-B102, Pb-free process, 260C peak reflow temperature ([see soldering profile](#))

Links to Additional Technical Information

[PCB Layout Tips](#)

[Qualification Flowchart](#)

[Soldering Profile](#)

[S-Parameters](#)

[RoHS Information](#)

[Other Technical Information](#)

TriQuint's liability is limited only to the Surface Acoustic Wave (SAW) component(s) described in this data sheet. TriQuint does not accept any liability for applications, processes, circuits or assemblies, which are implemented using any TriQuint component described in this data sheet.

Contact Information



PO Box 609501
Orlando, FL 32860-9501
USA

Phone: +1 (407) 886-8860
Fax: +1 (407) 886-7061
Email: info-product@tqs.com
Web: www.triquint.com

Or contact one of our worldwide
Network of [sales offices](#),
[Representatives or distributors](#)