



**Model 8000TP1G1z5,
M1 through M6
8,000 Watt Pulse Amplifier
1GHz–1.5GHz**


The Model 8000TP1G1z5 is a self contained, forced air cooled, broadband traveling wave tube (TWT) microwave amplifier designed for pulse applications at low duty factors where instantaneous bandwidth and high gain are required. A reliable TWT provides a conservative 8000 watts minimum peak RF pulse power at the amplifier output connector. Stated power specifications are at the fundamental frequency.

The amplifier's front panel digital display shows forward and reflected average power output or forward and reflected peak power, plus extensive system status information accessed through a series of menus via soft keys. Status indicators include power on, warm-up, standby, operate, faults, excess average or peak reflected power warning and remote. Standard features include a built-in IEEE-488 (GPIB) interface, 0dBm input, TTL Gating, VSWR protection, gain control, RF output sample ports, auto sleep, plus monitoring of TWT helix current, cathode voltage, collector voltage, heater current, heater voltage, baseplate temperature and cabinet temperature. Modular design of the power supply and RF components allow for easy access and repair. Use of switching mode power supplies results in significant weight reduction.

Housed in a stylish contemporary cabinet, the amplifier provides readily available pulsed RF power for a variety of applications in Test and Measurement, (including EMC RF pulse susceptibility testing), Industrial and University Research and Development, and Service applications. AR also offers a broad range of amplifiers for CW (Continuous Wave) applications.

See Model Configurations for alternative packaging and special features.

The export classification for this amplifier is ITAR. The export of this equipment is governed by the U.S. International Traffic in Arms Regulations (ITAR). This equipment and related technical data must not be transferred to a foreign person/entity without proper authorization of the U.S. Government. Violations may result in administrative, civil or criminal penalties.

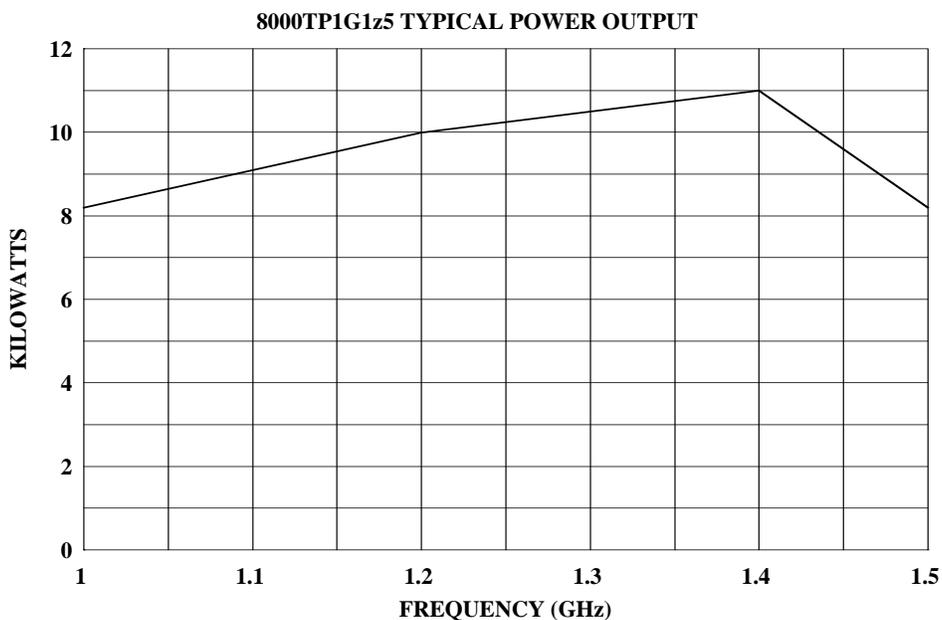

SPECIFICATIONS, MODEL 8000TP1G1z5

POWER (Fundamental), Peak Pulse, @ Output

Nominal 10,000 watts
 Minimum 8000 watts

FLATNESS ±6 dB maximum

FREQUENCY RESPONSE 1-1.5 GHz

INPUT FOR RATED OUTPUT 1.0 milliwatt maximum

GAIN (at maximum setting) 69 dB minimum

GAIN ADJUSTMENT (continuous range) 35 dB minimum

INPUT IMPEDANCE 50 ohms, VSWR 2.5:1 maximum

OUTPUT IMPEDANCE 50 ohms, VSWR 2.5:1 typical

MISMATCH TOLERANCE Output pulse width foldback protection at peak reflected power exceeding 2000 watts. Will operate without damage or oscillation with any magnitude and phase of source and load impedance. May oscillate with unshielded open due to coupling to input. Should not be tested with connector off.

PULSE CAPABILITY

Pulse Width 0.07 – 40 microseconds.

Pulse Rate (PRF) 100 kHz maximum

Duty Cycle 1% maximum.

RF Rise and Fall 70 ns max (10% to 90%).

Delay 300 ns maximum from pulse input to RF 90%

Pulse Width Distortion ±30 ns maximum (50% points of output pulse width compared to 50% points of input pulse width)

Pulse Off Isolation 80 dB minimum, 90 dB typical

Pulse Input TTL level, 50 ohm nominal termination

NOISE POWER DENSITY

(pulse on) Minus 55 dBm/Hz maximum; Minus 65 dBm/Hz typical

(pulse off) Minus 140 dBm/Hz (typical)

HARMONIC DISTORTION Minus 15 dBc maximum

PRIMARY POWER 190-260 VAC, 50/60 Hz single phase, 1 KVA maximum

CONNECTORS

RF input Type N female on rear panel

RF output Type DIN 7-16 on rear panel

RF output forward and reflected sample ports Type N female on rear panel

Pulse input Type BNC female on rear panel

GPIB IEEE-488 female on rear panel

Interlock DB-15 female on rear panel

COOLING Forced air (self contained fans), air entry and exit in rear.

SIZE (W x H x D) 50.3 x 26 x 94 cm, 19.8 x 10.3 x 37 in

WEIGHT (approximate) 57 kg, 125 lbs

EXPORT CLASSIFICATION ITAR

MODEL CONFIGURATIONS

E Package Alternatives. May select an alternative from the following [E1C or (E1C and E2S) and/or E3H]:

E1C Cabinet: Without outer enclosure for rack mounting, size (W x H x D) 49 x 22 (5U) x 94 cm, 19 x 8.75 (5U) x 37 in., Subtract approximately 11 kg, 25 lbs, for removal of outer enclosure.

E2S Slides: slides installed, add approximately 2 kg, 5 lbs.

E3H Handles: Front pull handles installed.

S Special Features: May select a special feature (extra cost) [S1E]

S1E Extended Frequency Range: Extended operation down to 0.9 GHz at reduced power of 5 kW minimum from 0.9 to 1.0 GHz.

Model Number	Features	
	E	S
8000TP1G1z5	Base model	–
M1	E1C	–
M2	E3H	–
M3	E1C & E3H	–
M4	E1C & E2S	–
M5	E1C & E2S & E3H	–
M6	E2S & E3H	S1E

Model number example: Model 8000TP1G1z5M2 would have option E3H front pull handles installed.