


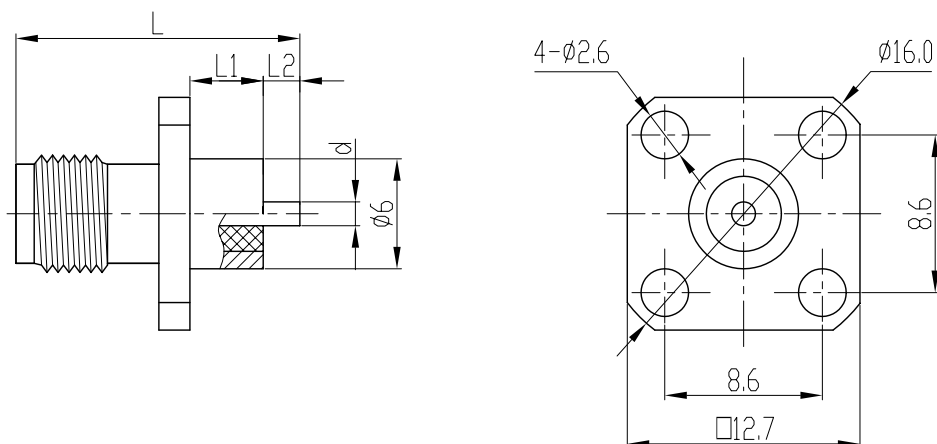

产品型号 type	L	L1	L2	d
SMA-KFD19	15.6	4.0	2.0	ø1.3
SMA-KFD76	14.0	3.0	1.5	ø0.7
SMA-KFD95	15.1	4.0	1.5	ø0.8
SMA-KFD369	24.3	12.8	2.0	ø1.3
SMA-KFD372	28.4	4.0	14.8	ø1.3
SMA-KFD377	15.6	3.0	3.0	ø1.3
SMA-KFD401	15.8	4.3	2.0	ø1.3

Electrical Characteristics:

1. Characteristic Impedance: 50 Ω
2. Frequency range: DC~18Ghz
3. Contact resistance
Center conductor: $\leq 3.0 \text{ m}\Omega$
Out conductor: $\leq 2.0 \text{ m}\Omega$
4. Insulation resistance: $\geq 5000 \text{ M}\Omega$
5. Insulator withstanding: 1000V
6. Durability: 500cycles

主要性能指标:

1. 特性阻抗: 50 Ω
2. 频率范围: DC~18Ghz
3. 接触电阻:
中心导体: $\leq 3.0 \text{ m}\Omega$
外导体: $\leq 2.0 \text{ m}\Omega$
4. 绝缘电阻: $\geq 5000 \text{ M}\Omega$
5. 介质耐压: 1000V
6. 插拔次数: 500次

Application: MIL-C-39012/55D

执行标准: MIL-C-39012/55D

Material&Finishing

1. Center contact :
Female: beryllium, gold plated
2. Body: brass, gold plated
3. Insulators: PTFE

材料和镀层

1. 中心接触件:
插孔: 铍青铜, 镀金
2. 壳体: 黄铜, 镀金
3. 绝缘子: 聚四氟乙烯

		SCALE	SMA-KFD19 RF COAXIAL CONNECTOR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .XX± .15 ±1° .XX± .05 .XXX±
		2.5:1		
DRAWN	NAME	DATE	西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.	
CHECKED				
APPROVED				