


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

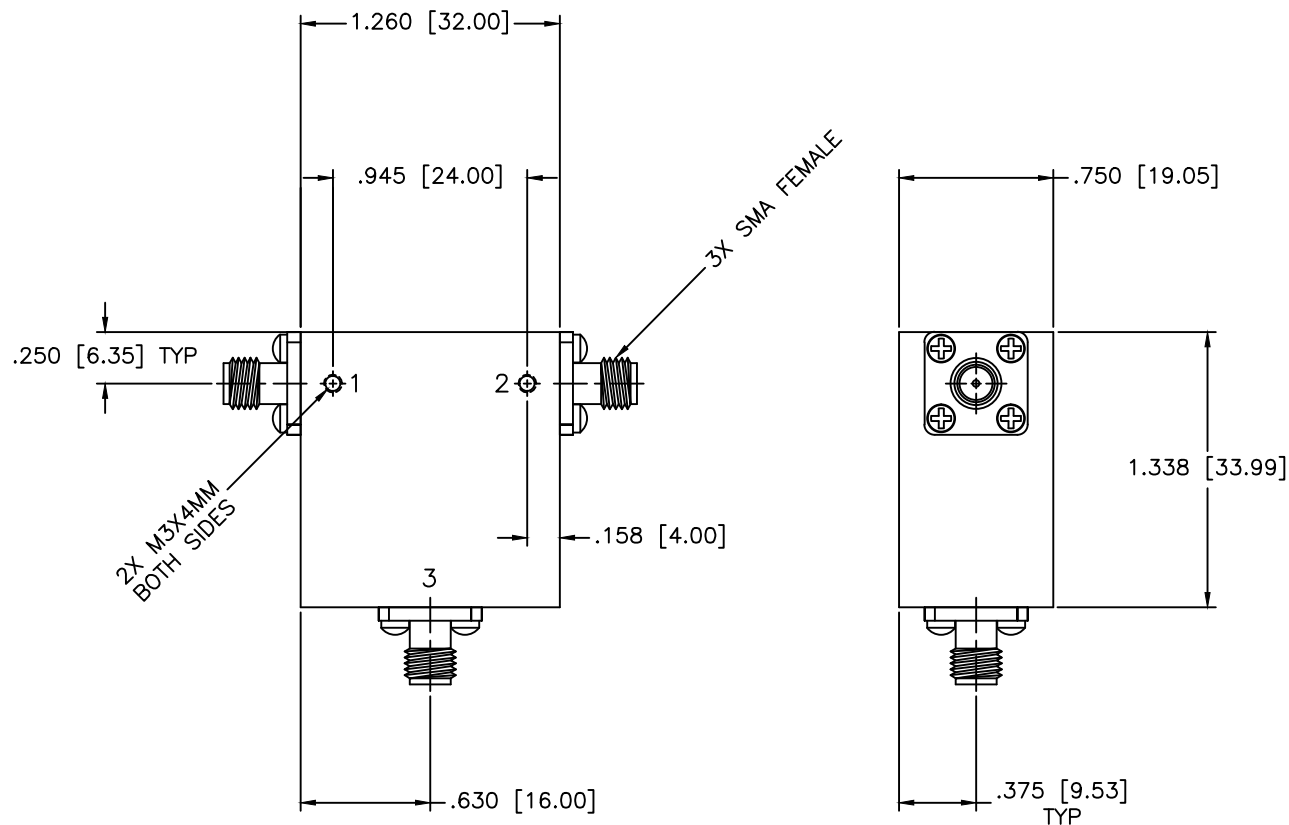

SPECIFICATIONS

Frequency Range: 2.7–5.4 GHz
 Isolation: 17dB Min.
 Insertion loss: 0.60 dB Max.
 VSWR: 1.35:1 Max.
 Power: 25W Avg, 250W Peak.
 Operating Temperature: –30°C to +70°C

MATERIAL:		 MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.05$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: COAXIAL CIRCULATOR		SHEET: N/A
DRAWN: Paiboon Luekhamhan DATE: 05-19-2010 APPROVED: T. Nguyen DATE: 05-19-2010		PART NO.: CS-15 CAGE CODE: OD2L5 SIZE: N/A REV: A DO NOT SCALE THE DRAWING		DWG NO.: 84836