

Absorptive /Reflective 2-8GHz SP8T Switch




- Wide Band Operation 2-8GHz
- High Power Handle Capability from 0.2W CW to 30W upon request.
- TTL compatible driver include
- Fast Switching Speed
- Low Insertion Loss and High Isolation
- Temperature Range -40°C~+85°C
- Customization available upon request

Absorptive SP8T- Single Pole Eight Throw						
Part Number	Frequency (GHz)	Insert. Loss (dB)	VSWR (Max:1)	Isolation min (dB)	Avg. Power Handling (Watts)	Switching Speed (ns)
RFSP8TA0208G	2-8	3.3	2.0	60	0.2~1	100~500
Reflective SP8T- Single Pole Eight Throw						
Part Number	Frequency (GHz)	Insert. Loss (dB)	VSWR (Max:1)	Isolation min (dB)	Avg. Power Handling (Watts)	Switching Speed (us)
RFSP8TR0208G	2-8	2.4	2.0	60	1~30	0.5~10

Environment specifications		
Altitude	45000 ft	
Vibration	10g rms (15 degree 2KHz)	
Humidity	100% RH at 35c, 95% RH at 40 deg c	
Shock	20G for 11msc	
PIN define	PIN 1: +5V PIN 2: -5V PIN 3: GND PIN 4: C1 PIN 5: C2 PIN 6: C3 PIN 7, 8, 9 N/A	

C3	C2	C1	ON
0	0	0	J0→J1
0	0	1	J0→J2
0	1	0	J0→J3
0	1	1	J0→J4
1	0	0	J0→J5
1	0	1	J0→J6
1	1	0	J0→J7
1	1	1	J0→J8

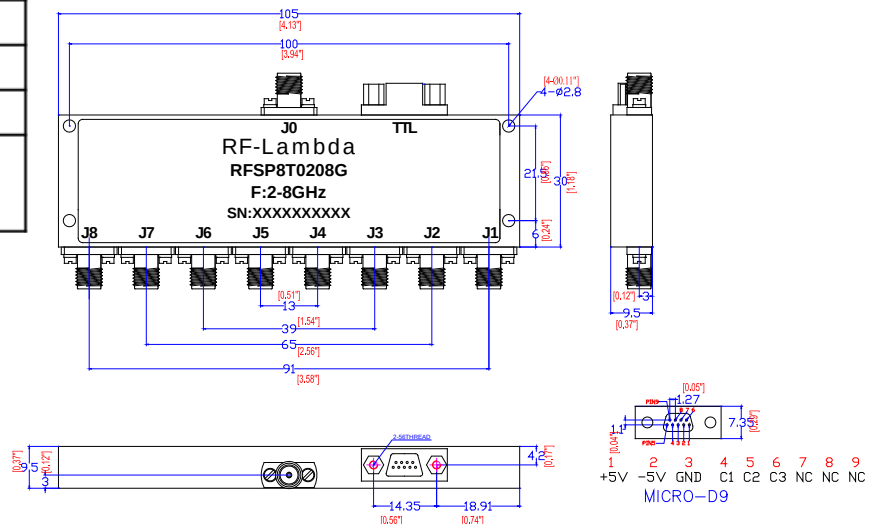

Absorptive / Reflective Coaxial Single Pole Eight Throw Switch 2-8GHz