


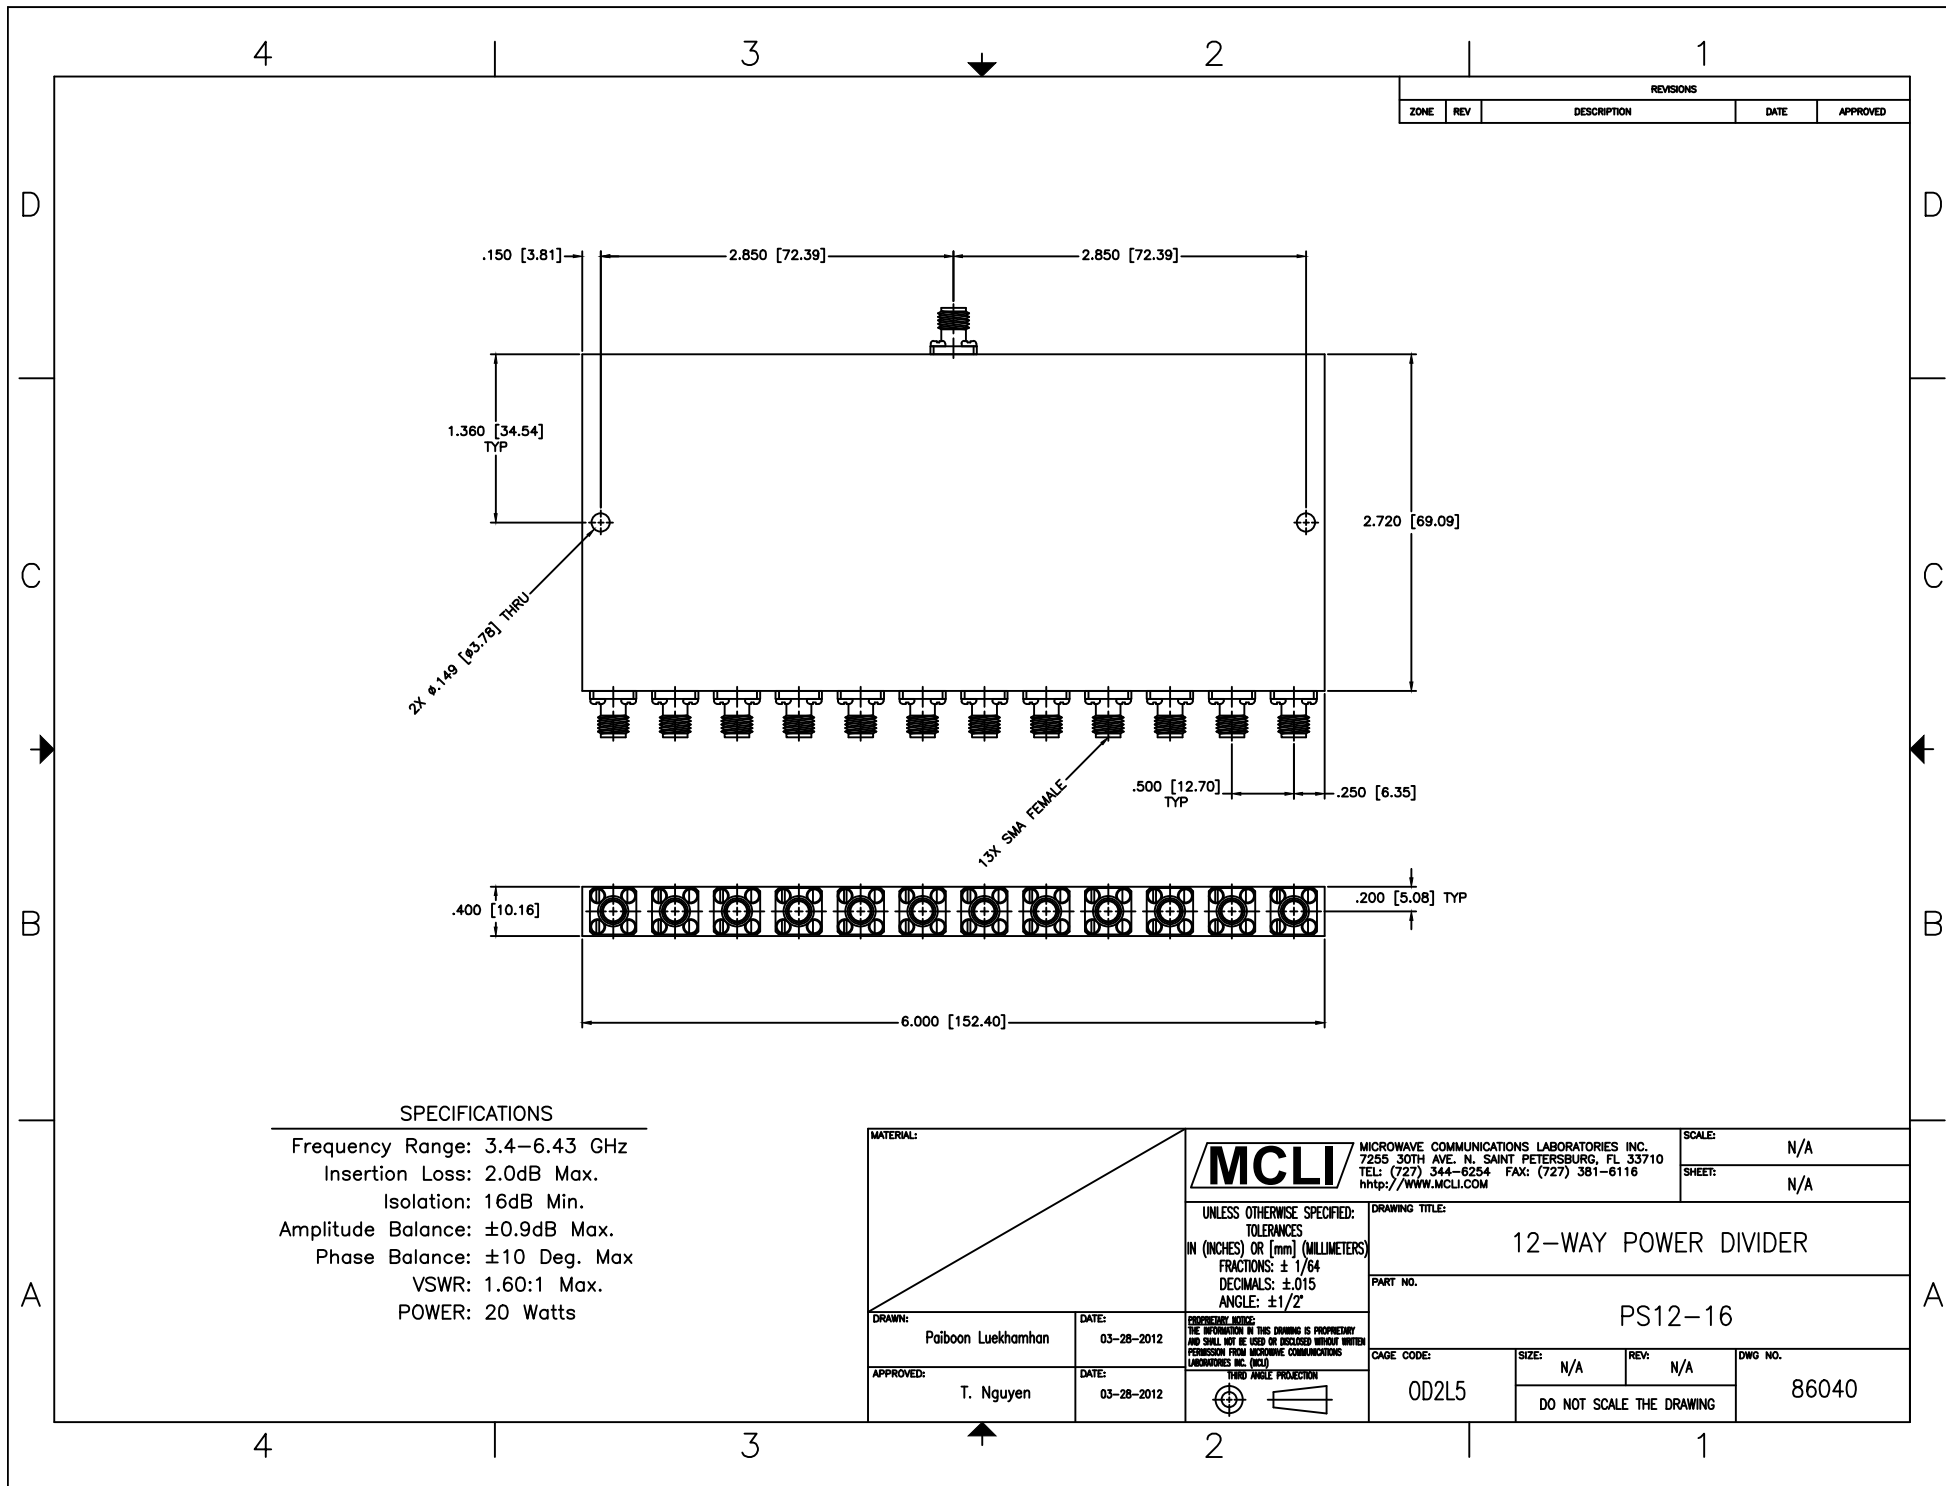

SPECIFICATIONS

Frequency Range: 3.4–6.43 GHz
 Insertion Loss: 2.0dB Max.
 Isolation: 16dB Min.
 Amplitude Balance: ± 0.9 dB Max.
 Phase Balance: ± 10 Deg. Max.
 VSWR: 1.60:1 Max.
 POWER: 20 Watts

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: ± 0.015 ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 12-WAY POWER DIVIDER		SHEET: N/A
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO.: PS12-16		A
DRAWN: Paiboon Luekhamhan	DATE: 03-28-2012	CAGE CODE: OD2L5	SIZE: N/A REV: N/A DO NOT SCALE THE DRAWING	
APPROVED: T. Nguyen	DATE: 03-28-2012	DWG NO.: 86040		