


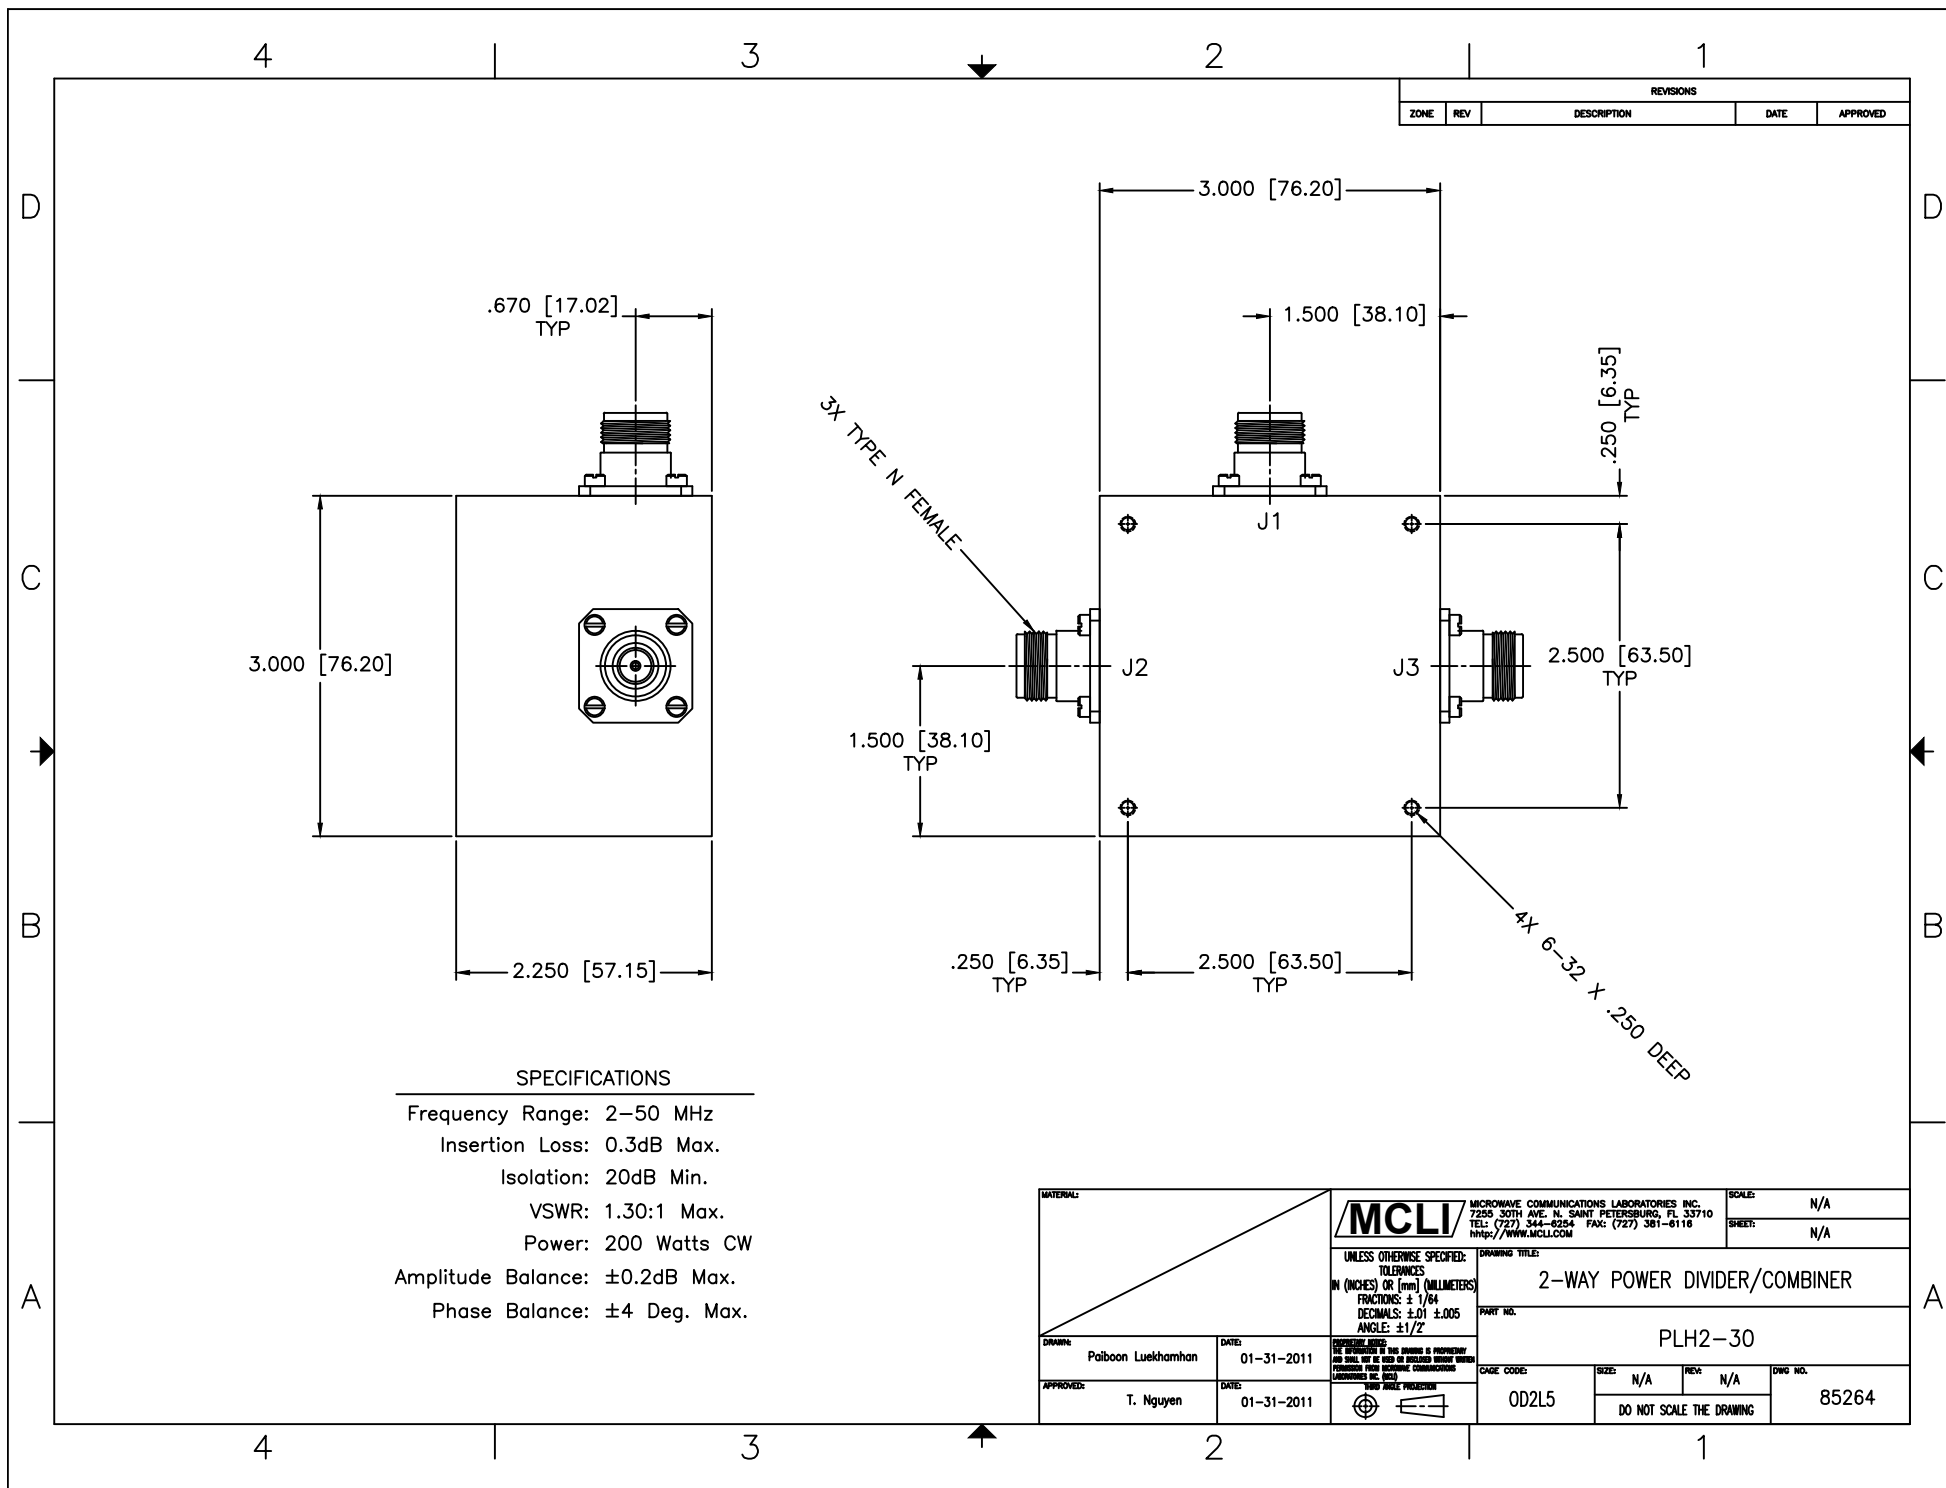

SPECIFICATIONS

Frequency Range: 2-50 MHz

Insertion Loss: 0.3dB Max.

Isolation: 20dB Min.

VSWR: 1.30:1 Max.

Power: 200 Watts CW

Amplitude Balance: ± 0.2 dB Max.

Phase Balance: ± 4 Deg. Max.

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7250 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-6118 http://www.mcli.com		SCALE: N/A SHEET: N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 2-WAY POWER DIVIDER/COMBINER			
DRAWN: Palboon Luekhamhan DATE: 01-31-2011		PART NO.: PLH2-30			
APPROVED: T. Nguyen DATE: 01-31-2011		CASE CODE: OD2L5 SIZE: N/A REV: N/A Dwg NO.: 85264 DO NOT SCALE THE DRAWING			