

RFVC6405

Octave Bandwidth Voltage Controlled Oscillator
2000MHz to 4000MHz

The RFVC6405 is an octave bandwidth Voltage Controlled Oscillator (VCO) designed for high performance transceiver applications.




Package: 16-pin,
12.7mm x 12.7mm x 4.57mm

Features

- Octave Bandwidth 2000MHz to 4000MHz
- -112dBc/Hz Typical at 100kHz Offset
- P_{OUT} 0dBm Typical
- 5V Supply
- 23mA Current Consumption

Applications

- Test and Measurement Instrumentation
- Wideband Radios for Military and Commercial Applications

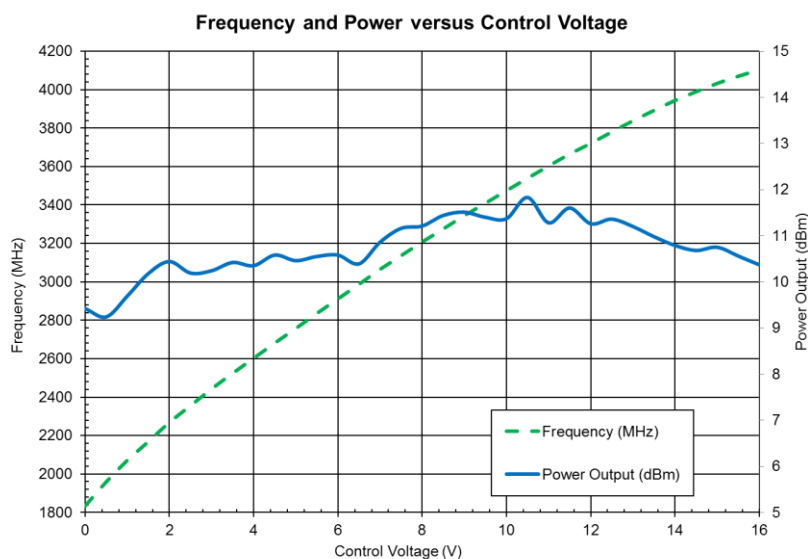

Functional Block Diagram

Ordering Information

RFVC6405

Call us at 1.480.756.6070

Absolute Maximum Ratings

Parameter	Rating	Unit
Supply Voltage (V_{CC})	5.0	V
Control Voltage	0 to 16	V
DC Voltage on RFOUT	25	V
Operating Temperature Range	-40 to +85	°C
Storage Temperature Range	-55 to +125	°C
ESD Rating - Human Body Model (HBM)	TBD	
Moisture Sensitivity Level	MSL1	



Caution! ESD sensitive device.









RFMD RoHS (Restriction of Hazardous Substances): Compliant per EU Directive 2011/65/EU.

Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability. Specified typical performance or functional operation of the device under Absolute Maximum Rating conditions is not implied.



Nominal Operating Parameters

Parameter	Specification			Unit	Condition
	Min	Typ	Max		
General Performance					Specifications: -40°C to 85°C
Frequency	2000		4000	MHz	
Tuning Voltage	0.5		16	V	
Tuning Sensitivity		150		MHz/V	
Output Power	-3	0	3	dBm	
2 nd Harmonic		-15		dBc	
SBB Phase Noise at 1kHz Offset		-60	-55	dBc/Hz	
SBB Phase Noise at 10kHz Offset		-90	-85	dBc/Hz	
SBB Phase Noise at 100kHz Offset		-112	-105	dBc/Hz	
SBB Phase Noise at 1MHz Offset		-132	-120	dBc/Hz	
Power Supply		5		V	
Supply Current		23	30	mA	
Frequency Pushing (3.15V to 3.45V)		4		MHz/V	
Frequency Pushing (12dB RL)		4		MHz, p-p	
Tuning Port Capacitance		18		pF	
Output Impedance		50		Ω	
Modulation BW		1000		kHz	


Typical Performance Board Performance: $V_{CC} = 5V$ unless otherwise noted

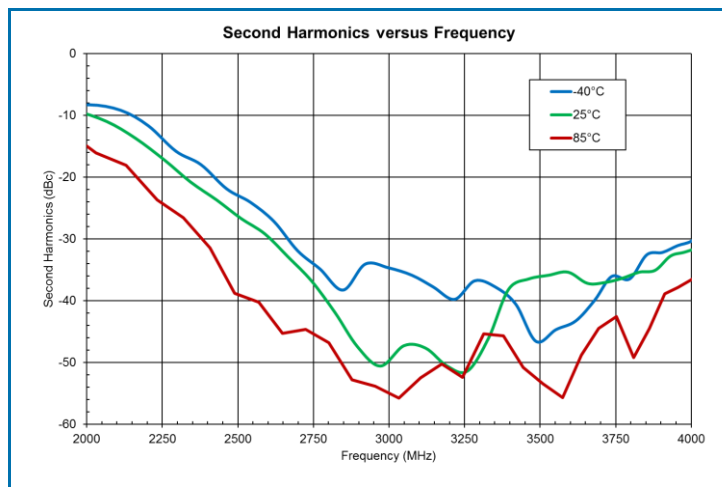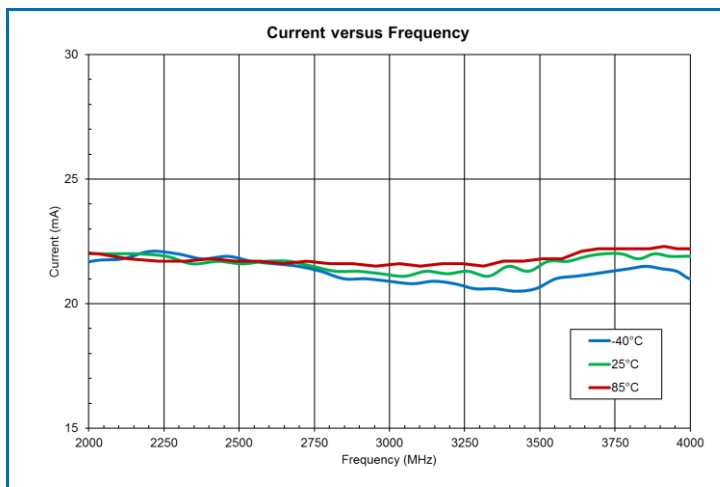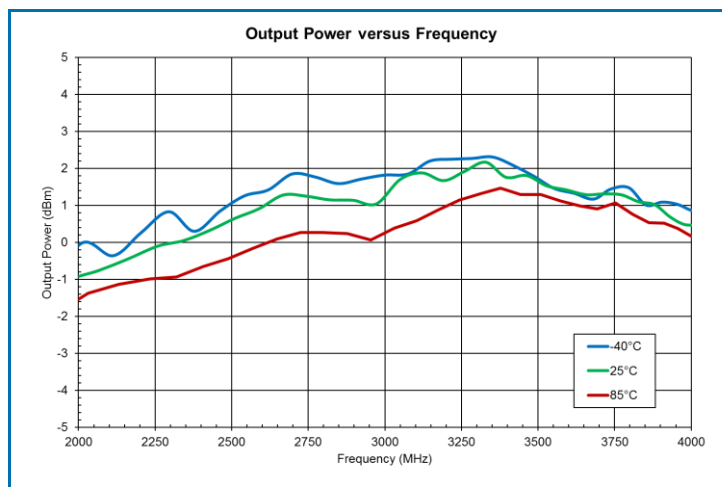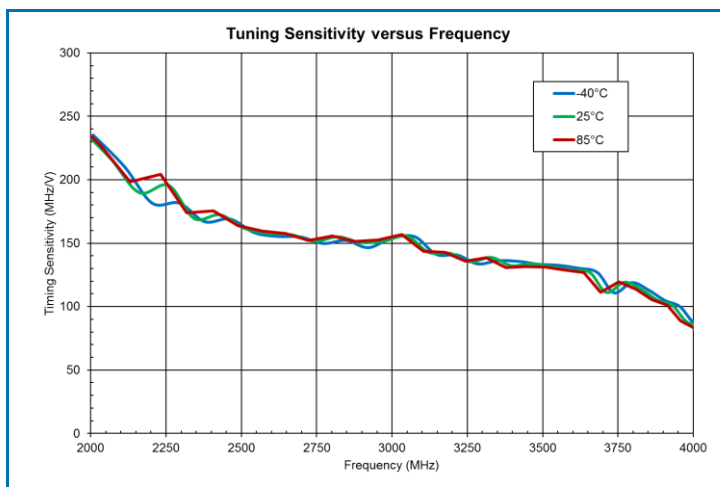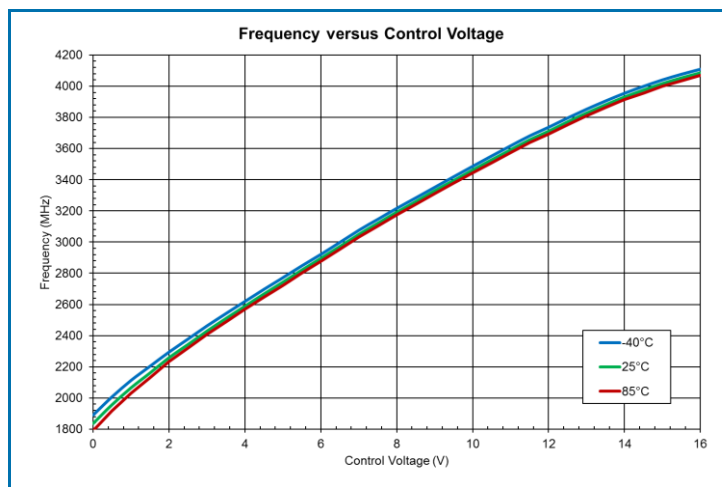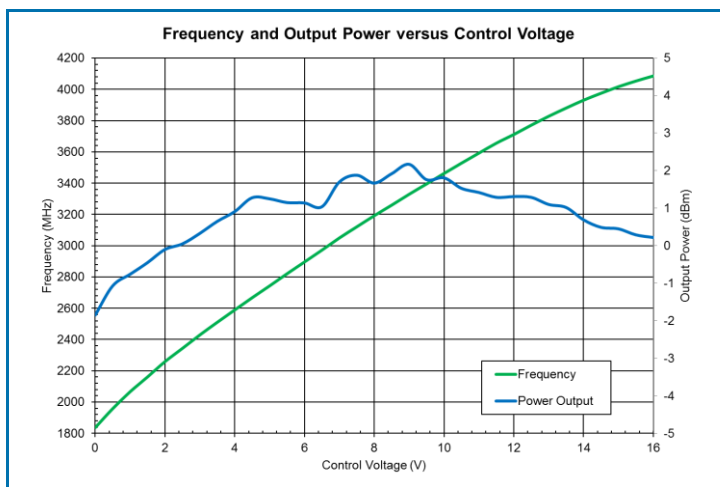


Typical Performance Board Performance: $V_{CC} = 5V$ unless otherwise noted

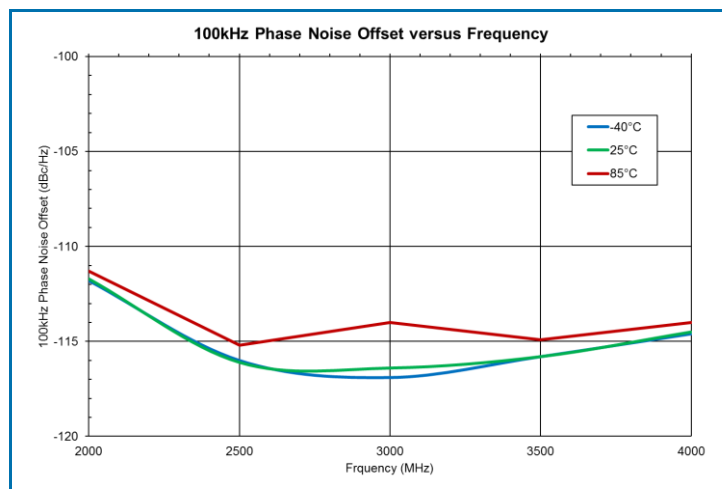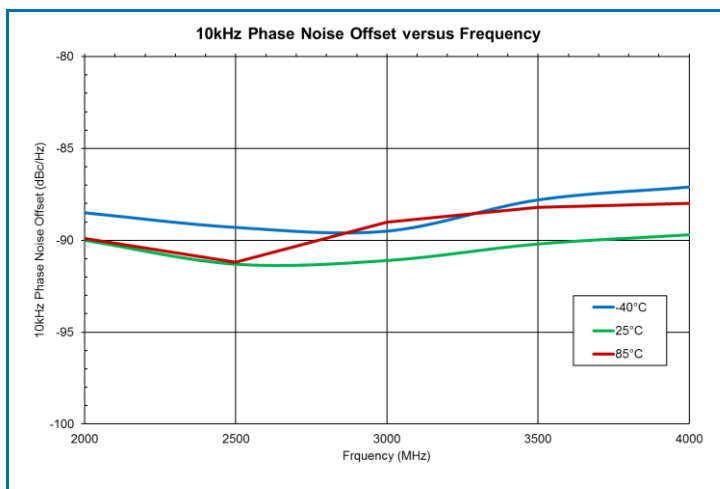


Typical Performance Board Performance $V_{CC} = 5V$, Frequency 2000MHz

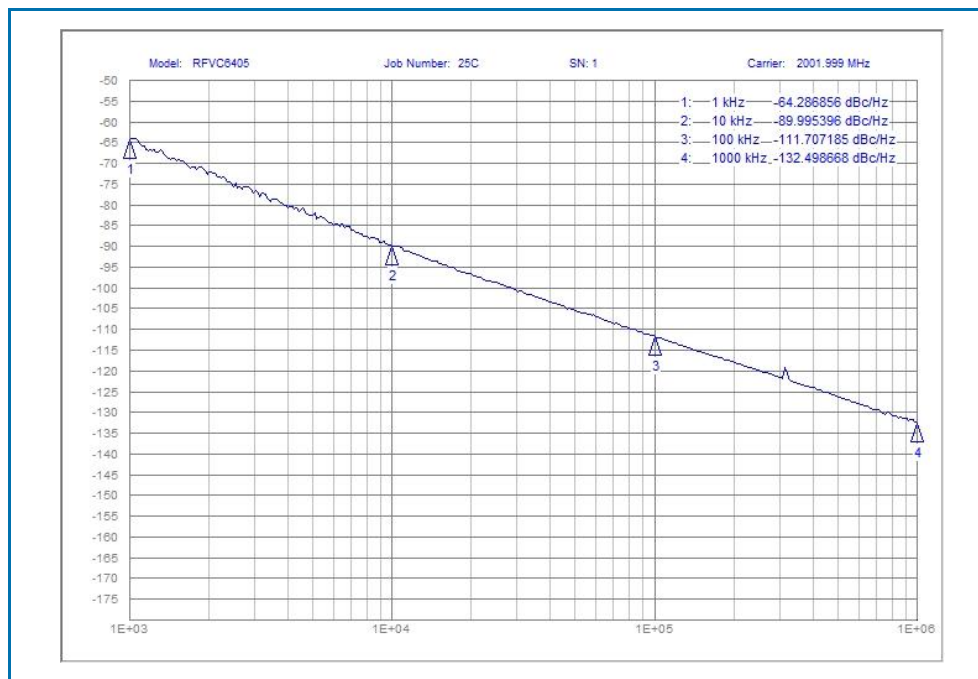


Typical Performance Board Performance $V_{CC} = 5V$, Frequency 2500MHz

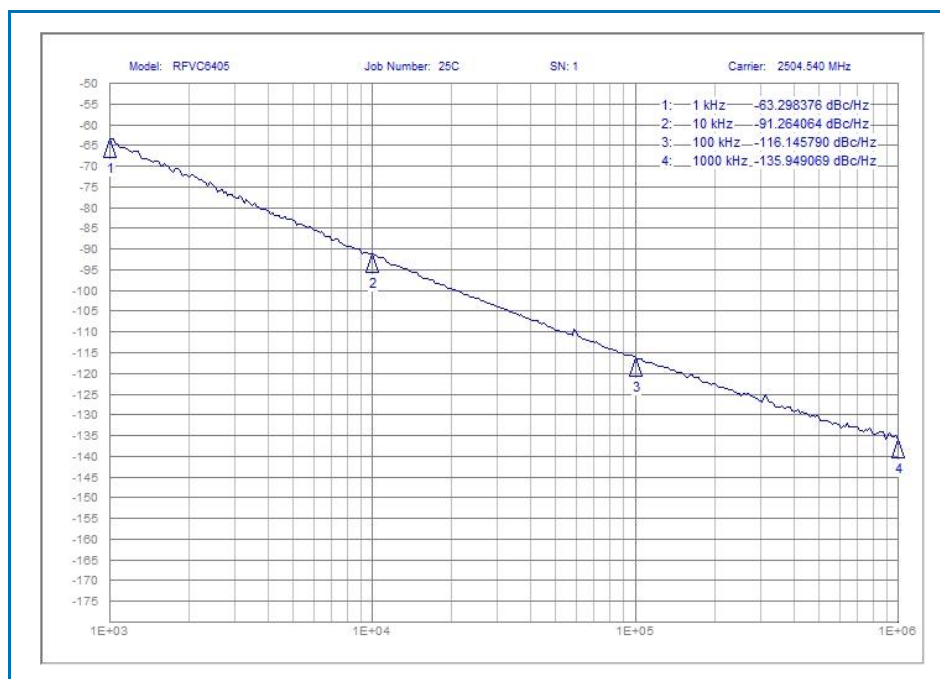


Typical Performance Board Performance $V_{CC} = 5V$, Frequency 3000MHz

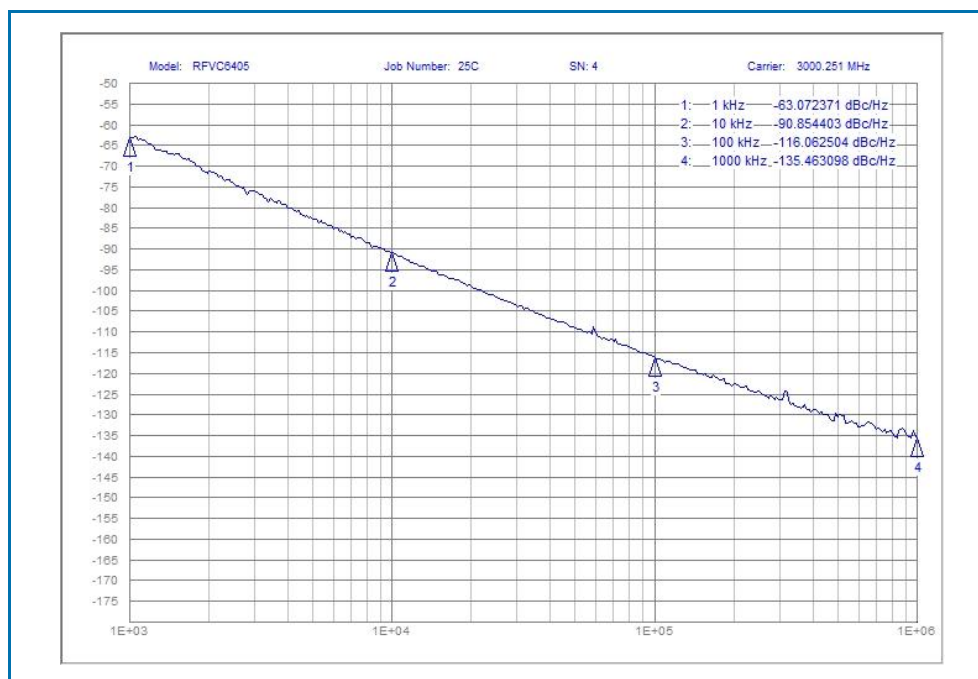





Typical Performance Board Performance $V_{CC} = 5V$, Frequency 3500MHz

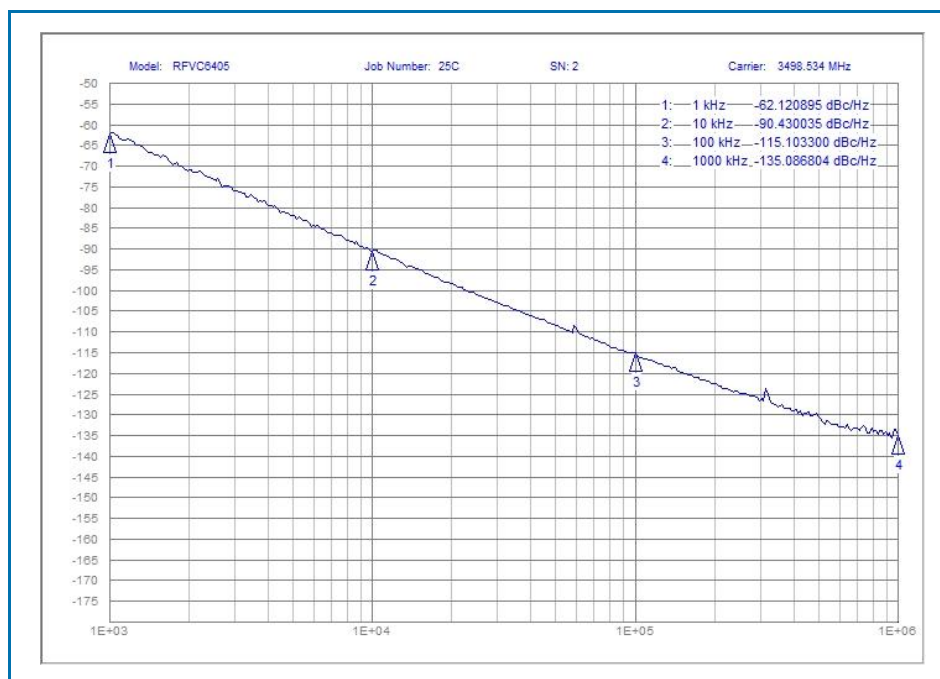

Typical Performance Board Performance $V_{CC} = 5V$, Frequency 4000MHz

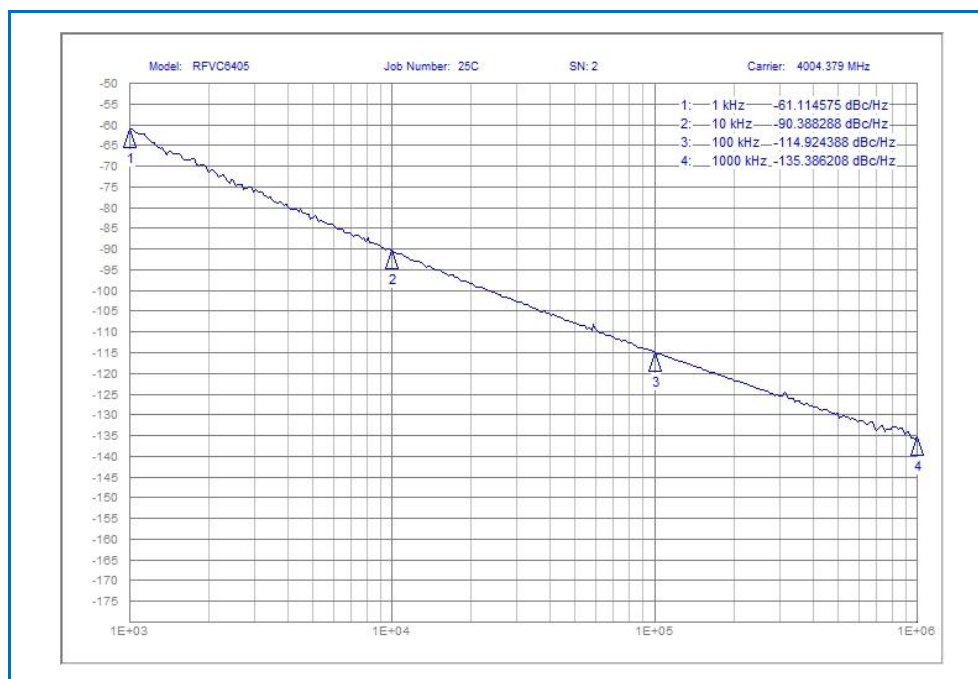

Package Outline Drawing 12.7mm x 12.7mm Laminate Module

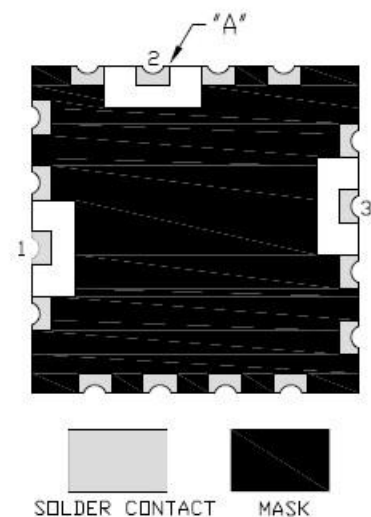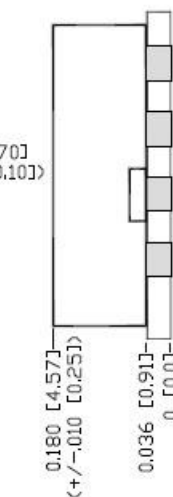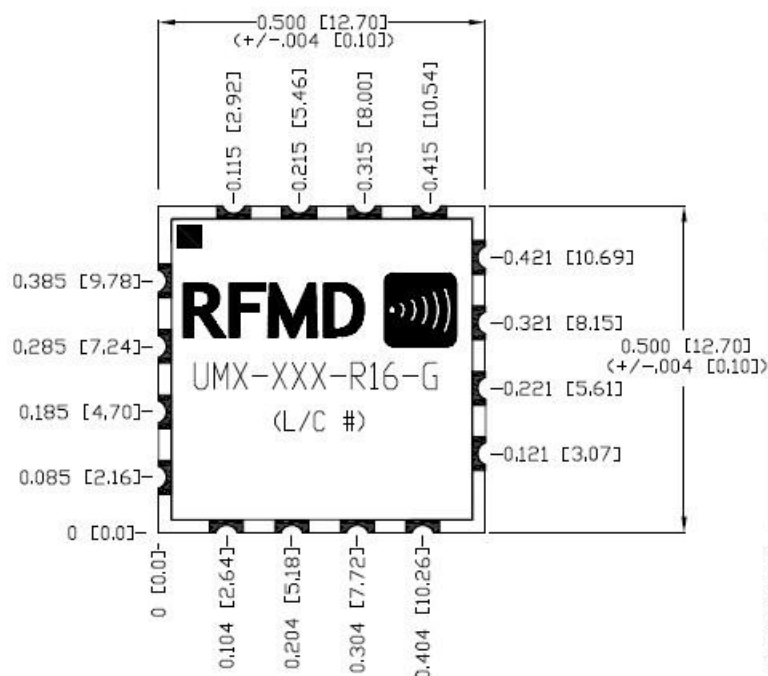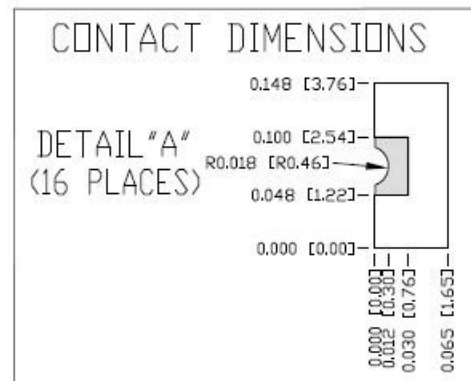

TOP VIEW

SIDE VIEW

BOTTOM VIEW

CONTACT ASSIGNMENTS:	
1: RF OUT	
2: SUPPLY INPUT	
3: TUNING VOLTAGE INPUT	
ALL OTHER CONTACTS ARE GROUND	

Recommended Land Pattern Dimensions in millimeters

