


| REV. | DATE     | DESCRIPTION                                   |
|------|----------|-----------------------------------------------|
| A    | 01/12/02 | MODIFY FERRULE LENGTH                         |
| B    | 01/06/08 | MODIFY BODY SLOT DIMENSIONS AND BARREL LENGTH |

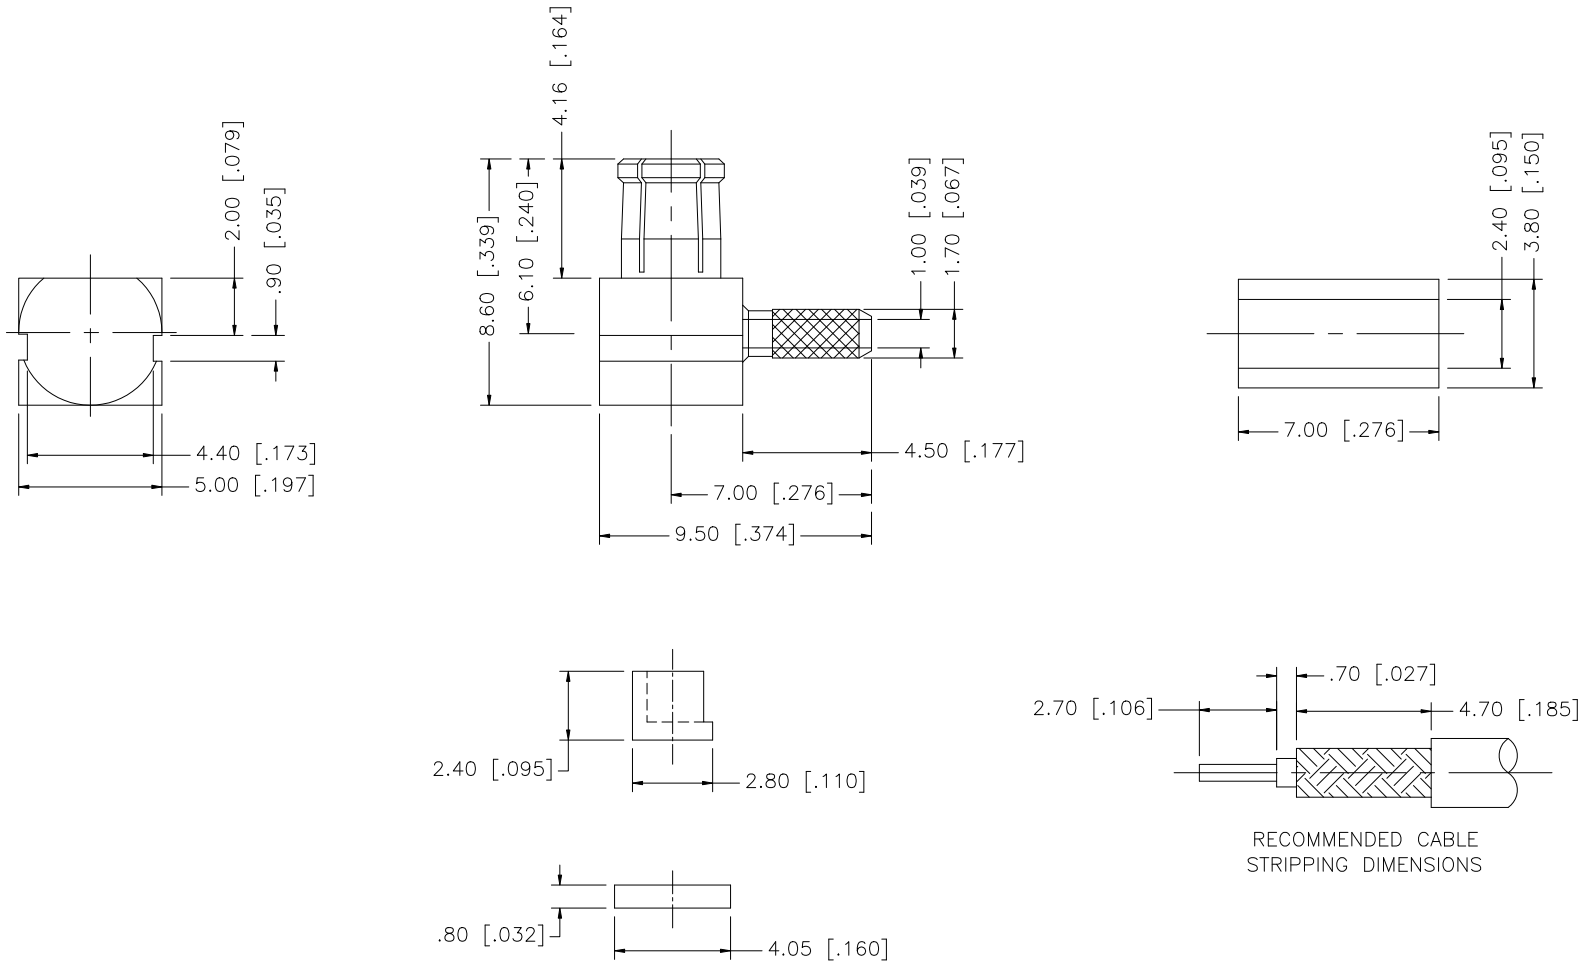

- NOTES:
1. CRIMPED FERRULE HEX CRIMP SIZE .128"
  2. CONTACT PIN TO SOLDER.

|   |             |             |         |     |                                                                                                                                        |              |          |                     |        |          |  |
|---|-------------|-------------|---------|-----|----------------------------------------------------------------------------------------------------------------------------------------|--------------|----------|---------------------|--------|----------|--|
|   |             |             |         |     | UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.             | APPROVALS    | DATE     | Amphenol Connex     |        |          |  |
| 8 |             |             |         |     |                                                                                                                                        | DRAWN G.R.S. | 01/06/07 |                     |        |          |  |
| 7 | FERRULE     | COPPER      | GOLD    | 1   |                                                                                                                                        | CHECKED      |          | PART DESCRIPTION    |        |          |  |
| 6 | COVER       | BRASS       | GOLD    | 1   | UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:<br>0.5 - 8mm ± 0.20mm<br>8 - 30mm ± 0.40mm<br>30 - 120mm ± 0.50mm           | ISSUED       |          |                     |        |          |  |
| 5 | INSULATOR   | DELRIN      | NATURAL | 1   |                                                                                                                                        | SHEET 1 OF 1 |          | PART NO.            |        |          |  |
| 4 | CONTACT PIN | BRASS       | GOLD    | 1   | UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:<br>.020 - .315 = ± 0.007"<br>.315 - 1.180 = ± 0.015"<br>1.180 - 4.724 = ± 0.020" |              |          |                     |        |          |  |
| 3 | INSULATOR   | TEFLON      | NATURAL | 1   |                                                                                                                                        | CAD FILE     |          | 252135              |        |          |  |
| 2 | BODY        | BER. COPPER | GOLD    | 1   |                                                                                                                                        |              |          |                     |        |          |  |
| 1 | HOUSING     | BRASS       | GOLD    | 1   |                                                                                                                                        |              |          | DWG. NO. 252135.DWG |        |          |  |
|   | DESCRIPTION | MATERIAL    | FINISH  | QTY | DO NOT SCALE DRAWING                                                                                                                   |              |          |                     |        |          |  |
|   |             |             |         |     |                                                                                                                                        |              |          | REV. B              | SIZE A | SCALE NA |  |