


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

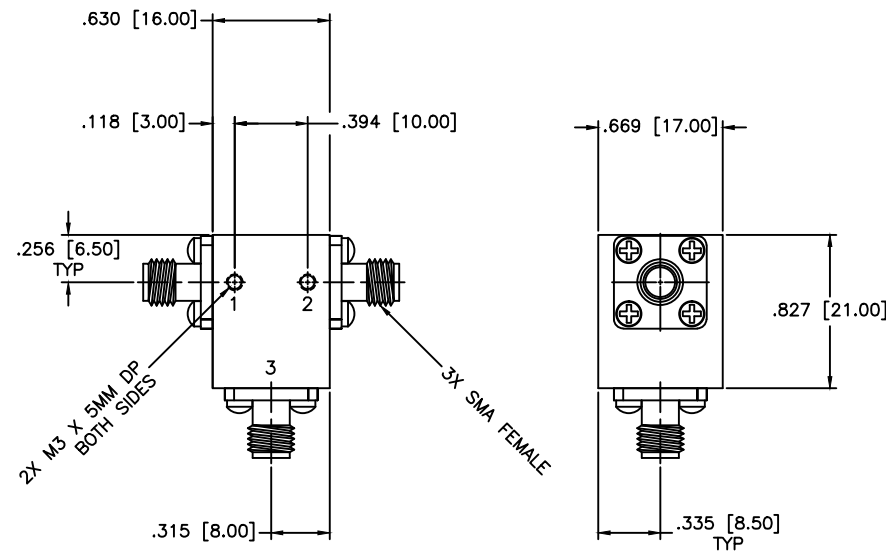

SPECIFICATIONS

Frequency Range: 13.75–14.50 GHz
Isolation: 18dB Min.
Insertion loss: 0.5dB Max.
VSWR: 1.35:1 Max.
Operating Temperature: –54°C to +85°C
Power: 25W Avg, 100W Peak

MATERIAL: 		 MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com		SCALE: N/A	
				SHEET: N/A	
DRAWN: Paiboon Luekhamhan		DATE: 09-20-2010		DRAWING TITLE: COAXIAL CIRCULATOR	
APPROVED: T. Nguyen		DATE: 09-20-2010		PART NO.: CS-64	
THIRD ANGLE PROJECTION 		CAGE CODE: OD2L5		SIZE: N/A REV: N/A DO NOT SCALE THE DRAWING	
PROPERTY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DWG NO.: 84996			