


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

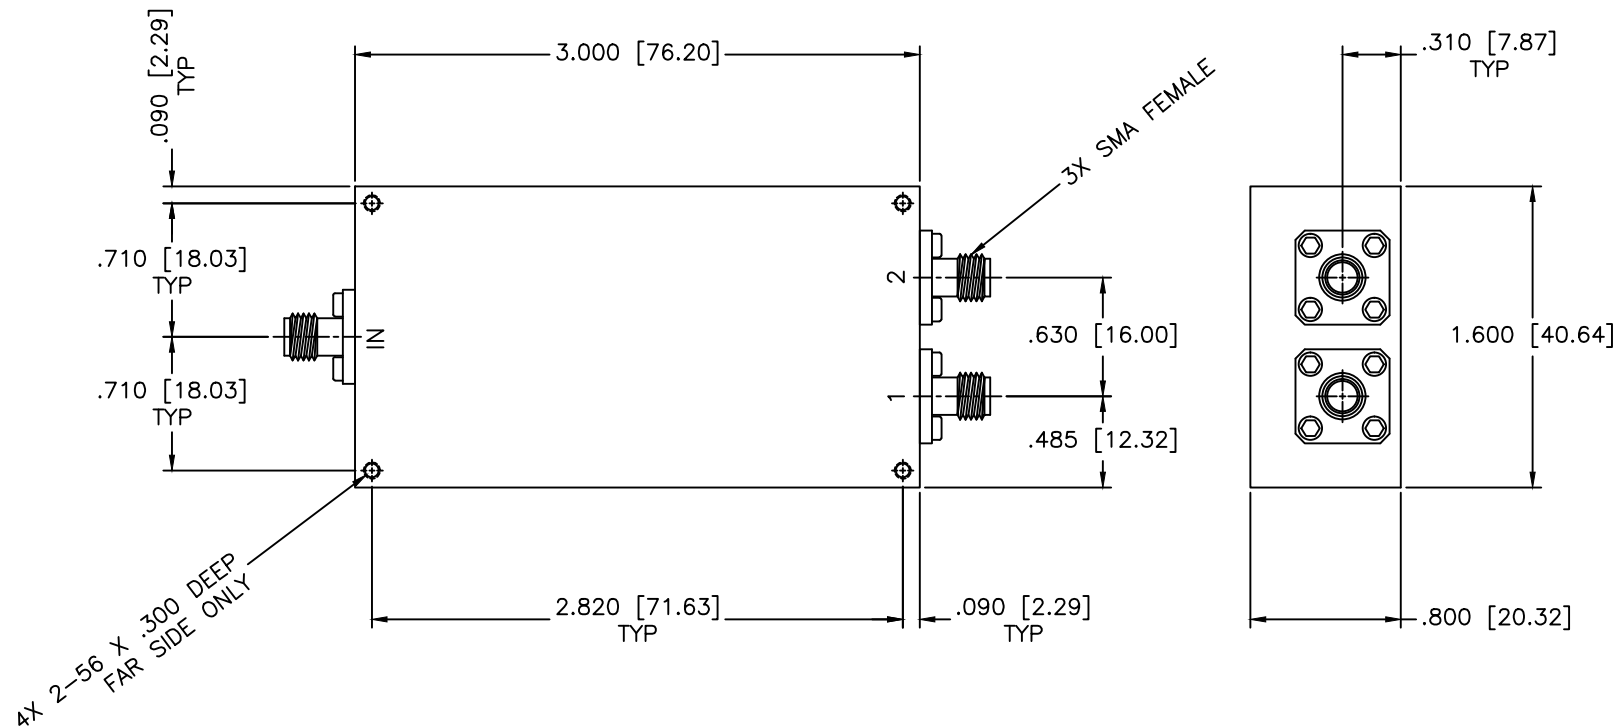

SPECIFICATIONS

Frequency Range: 100–500 MHz
 Insertion Loss: 0.5dB Max.
 Isolation: 20dB Min.
 Phase Balance: ± 5 Deg. Max.
 Amplitude Balance: ± 0.25 dB Max.
 VSWR: 1.35:1 Max.
 Input Power: 25W CW

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 2-WAY POWER DIVIDER		SHEET: N/A
DRAWING: Paboon Luekhamhan DATE: 02-01-2011 PROPOSED: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO.: PLH2-10		
APPROVED: T. Nguyen DATE: 02-01-2011		CAGE CODE: OD2L5 SIZE: A REV: N/A DO NOT SCALE THE DRAWING	DWG NO.: 85300	