



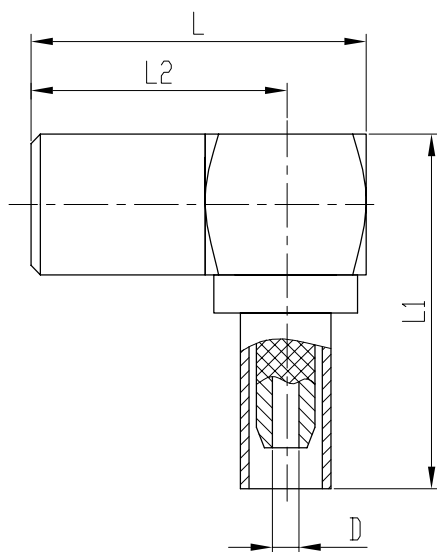

剥线尺寸
stripping dimensions

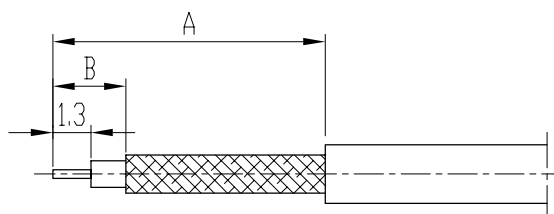

产品型号 type	配接电缆 cable type	D	L	L1	L2	A	B
SSMB-KW2	SFF-50-1-RG178/U	Ø0.9	12.3	14	9.55	9.3	4.3
SSMB-KW2-1			11.4	13	9.3	8.5	2.0
SSMB-KW3	SFF-50-1.5-1-RG316/U	Ø1.6	12.3	14.1	9.55	10.3	4.1
SSMB-KW3-1			11.4	13	9.3	9.3	3.1

Electrical Characteristics:

- Characteristic Impedance: 50 Ω
- Frequency range: DC~3Ghz
- Contact resistance
Center conductor: $\leq 5.0 \text{ m}\Omega$
Out conductor: $\leq 2.5 \text{ m}\Omega$
- Insulation resistance: $\geq 1000 \text{ M}\Omega$
- Insulator withstanding: 500V
- VSWR: ≤ 1.4
- Durability: 500cycles

主要性能指标:

- 特性阻抗: 50 Ω
- 频率范围: DC~3Ghz
- 接触电阻:
中心导体: $\leq 5.0 \text{ m}\Omega$
外导体: $\leq 2.5 \text{ m}\Omega$
- 绝缘电阻: $\geq 1000 \text{ M}\Omega$
- 介质耐压: 500V
- 电压驻波比: ≤ 1.4
- 插拔次数: 500次

Application: IEC 169-19


Material&Finishing

- Center contact :
Female: beryllium copper, gold plated
- Body: brass, gold plated
- Crimp ferrule: copper, nickel plated
- Insulators: PTFE

执行标准: IEC 169-18

材料和镀层

- 中心接触件:
插孔: 铍青铜, 镀金
- 壳体: 黄铜, 镀金
- 线夹: 黄铜, 镀镍
- 绝缘子: 聚四氟乙烯

	SCALE	
	4:1	
NAME	DATE	
DRAWN		
CHECKED		
APPROVED		

SSMB-KW2
RF COAXIAL CONNECTOR

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE mm, TOLERANCES ARE
FRACTIONS DECIMALS ANGLES
.X $\pm$.15 $\pm 1^\circ$
.XX $\pm$.05
.XXX $\pm$

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO.,LTD.