


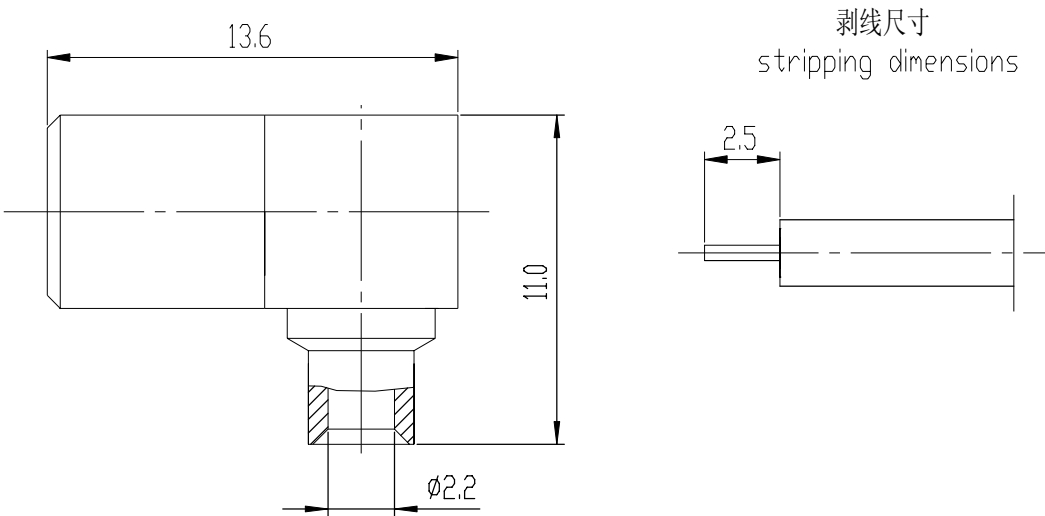

电缆型号:SFT-50-2-1、RG405/U
cable type

Electrical Characteristics:

- 1.Characteristic Impedance: 50Ω
- 2.Frequency range: DC~4Ghz
- 3.Contact resistance
 - Center conductor: ≤6.0 mΩ
 - Out conductor: ≤1.0 mΩ
- 4.Insulation resistance: ≥1000MΩ
- 5.Insulator withstanding:750V
- 6.VSWR: ≤1.4

7.Durability: 500cycles
Application:MIL-C-39012/68A

Material&Finishing

- 1.Center contact:
 - Female:beryllium copper,gold plated
- 2.Body:brass,gold plated
- 3.Insulators:PTFE


主要性能指标:

- 1. 特性阻抗: 50Ω
- 2. 频率范围: DC~4Ghz
- 3. 接触电阻:
 - 中心导体: ≤6.0 mΩ
 - 外导体: ≤1.0 mΩ
- 4. 绝缘电阻: ≥1000MΩ
- 5. 介质耐压: 750V
- 6. 电压驻波比: ≤1.4
- 7. 插拔次数: 500次

执行标准:MIL-C-39012/68A

材料和镀层

- 1. 中心接触件:
 - 插孔:镀青铜, 镀金
- 2. 壳体:黄铜, 镀金
- 3. 绝缘子:聚四氟乙烯

		SCALE		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±	
		4:1			
		NAME	DATE		SMB-KWB2 RF COAXIAL CONNECTOR
DRAWN					
CHECKED					
APPROVED					
				西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.	