


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

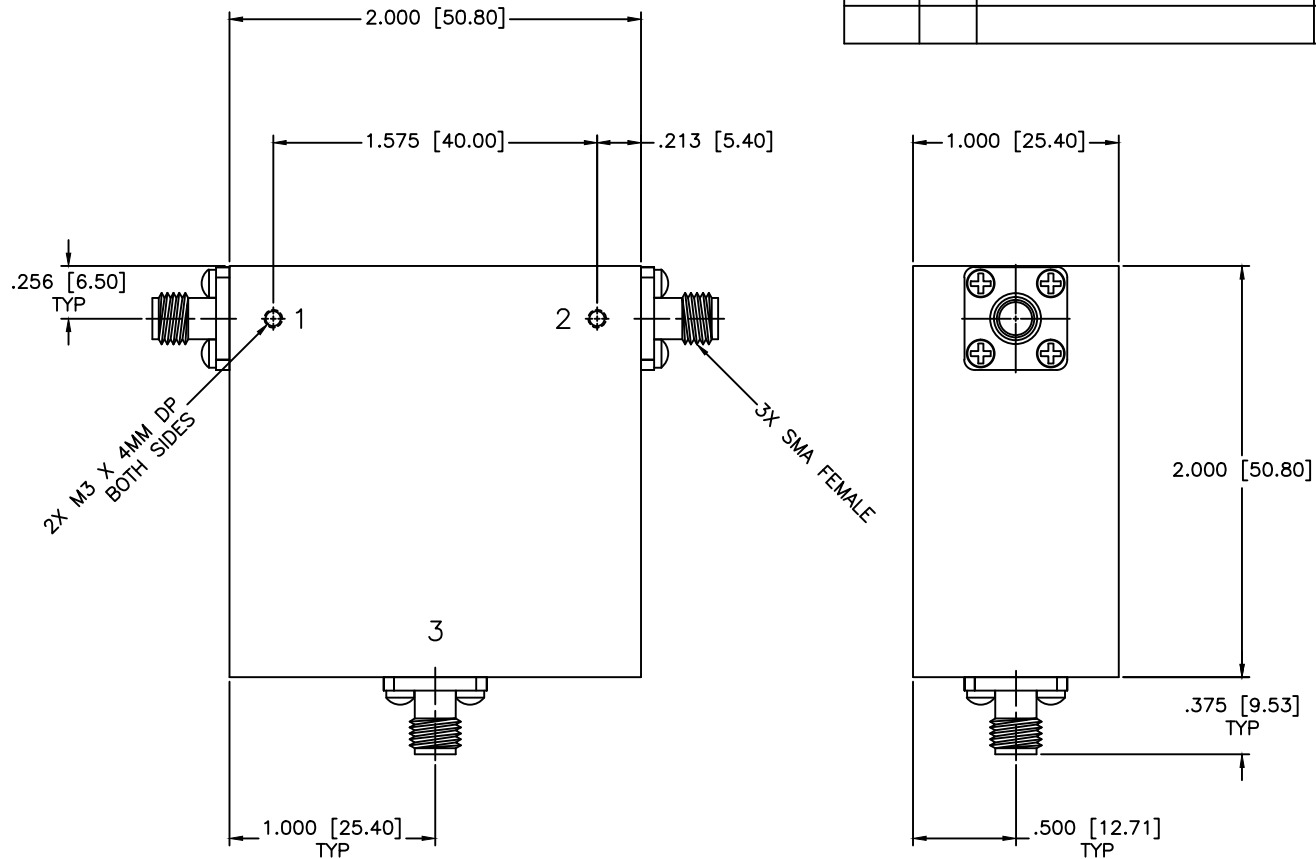

SPECIFICATIONS

Frequency Range: 0.8–1.0 GHz
 Isolation: 20dB Min.
 Insertion loss: 0.40dB Max.
 VSWR: 1.25:1 Max.
 Operating Temperature: –54°C to +85°C
 Average: 1 Watt

MATERIAL: 		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DRAWN: Paiboon luekhamhan DATE: 03-17-2008		DRAWING TITLE: COAXIAL CIRCULATOR PART NO.: CS-62		
APPROVED: T. Nguyen DATE: 03-17-2008		CAGE CODE: OD2L5 SIZE: N/A REV: N/A DO NOT SCALE THE DRAWING	DWG NO.: 82795	