




Standards
NF C 96-315
MIL-DTL-3933

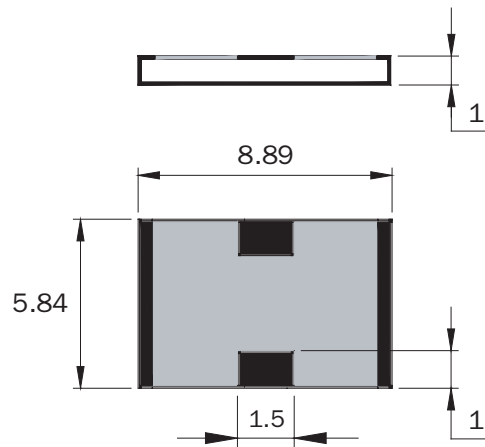

Substrate	BeO
Resistive film	Thick film
Protection film	Epoxy
Contacts	PtAg

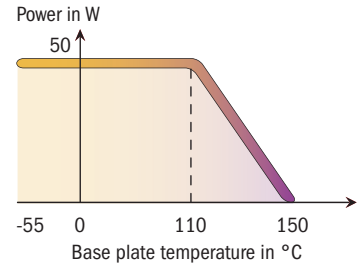

Dimensions in mm

P/N	Attenuation* (dB)	Frequency (GHz)	Power (W)	Impedance ($\Omega \pm 5\%$)	Max VSWR	Accuracy $\pm \Delta\alpha$ (dB)
43-0107	1	3	50	50	1.25	0.6
43-0108	2	3	50	50	1.25	0.6
43-0062	3	3	50	50	1.25	0.6
43-0061	6	3	50	50	1.25	0.6
43-0060	10	3	50	50	1.25	0.6
43-0105	15	3	50	50	1.25	1
43-0059	20	3	50	50	1.25	1
43-0058	30	3	50	50	1.25	1.2

mm	inch
1	0.039
1.5	0.059
5.84	0.230
8.89	0.350

* Others values on request



Available on Tap and Reel Packaging