


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

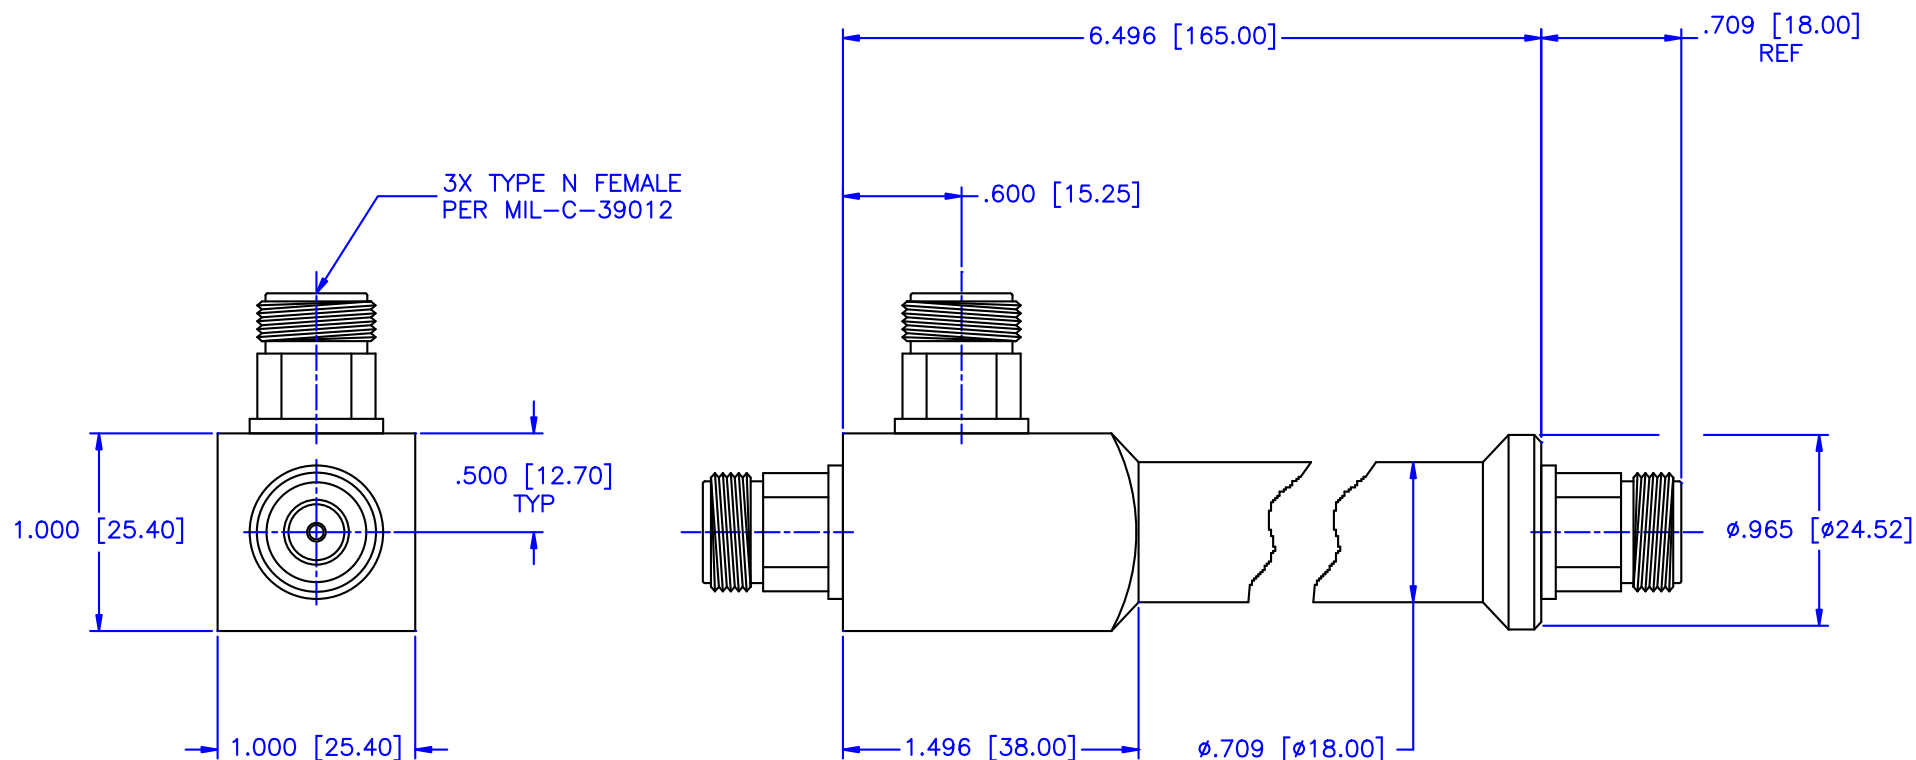

SPECIFICATIONS:

Frequency Range: 0.8–2.5 GHz

Insertion Loss: 2.6dB Max.

Isolation: 14dB Min.

VSWR Input/Output: 1.30:1/1.30:1 Max.

Phase Balance: ± 10 Deg. Max.

Amplitude Balance: 0.6dB Max.

Power: 200 Watts (Load vswr@1.2)

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A	
					SHEET:	N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: ± 0.01 ± 0.005 ANGLE: $\pm 1/2^\circ$		DRAWING TITLE:				2-WAY POWER DIVIDER	
		PART NO.				PS2-114-200/NF	
DRAWN:	DATE:	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	THIRD ANGLE PROJECTION 	CAGE CODE:	SIZE:	REV:	DWG NO.
APPROVED:	DATE:			OD2L5	A	N/A	82606
				DO NOT SCALE THE DRAWING			