


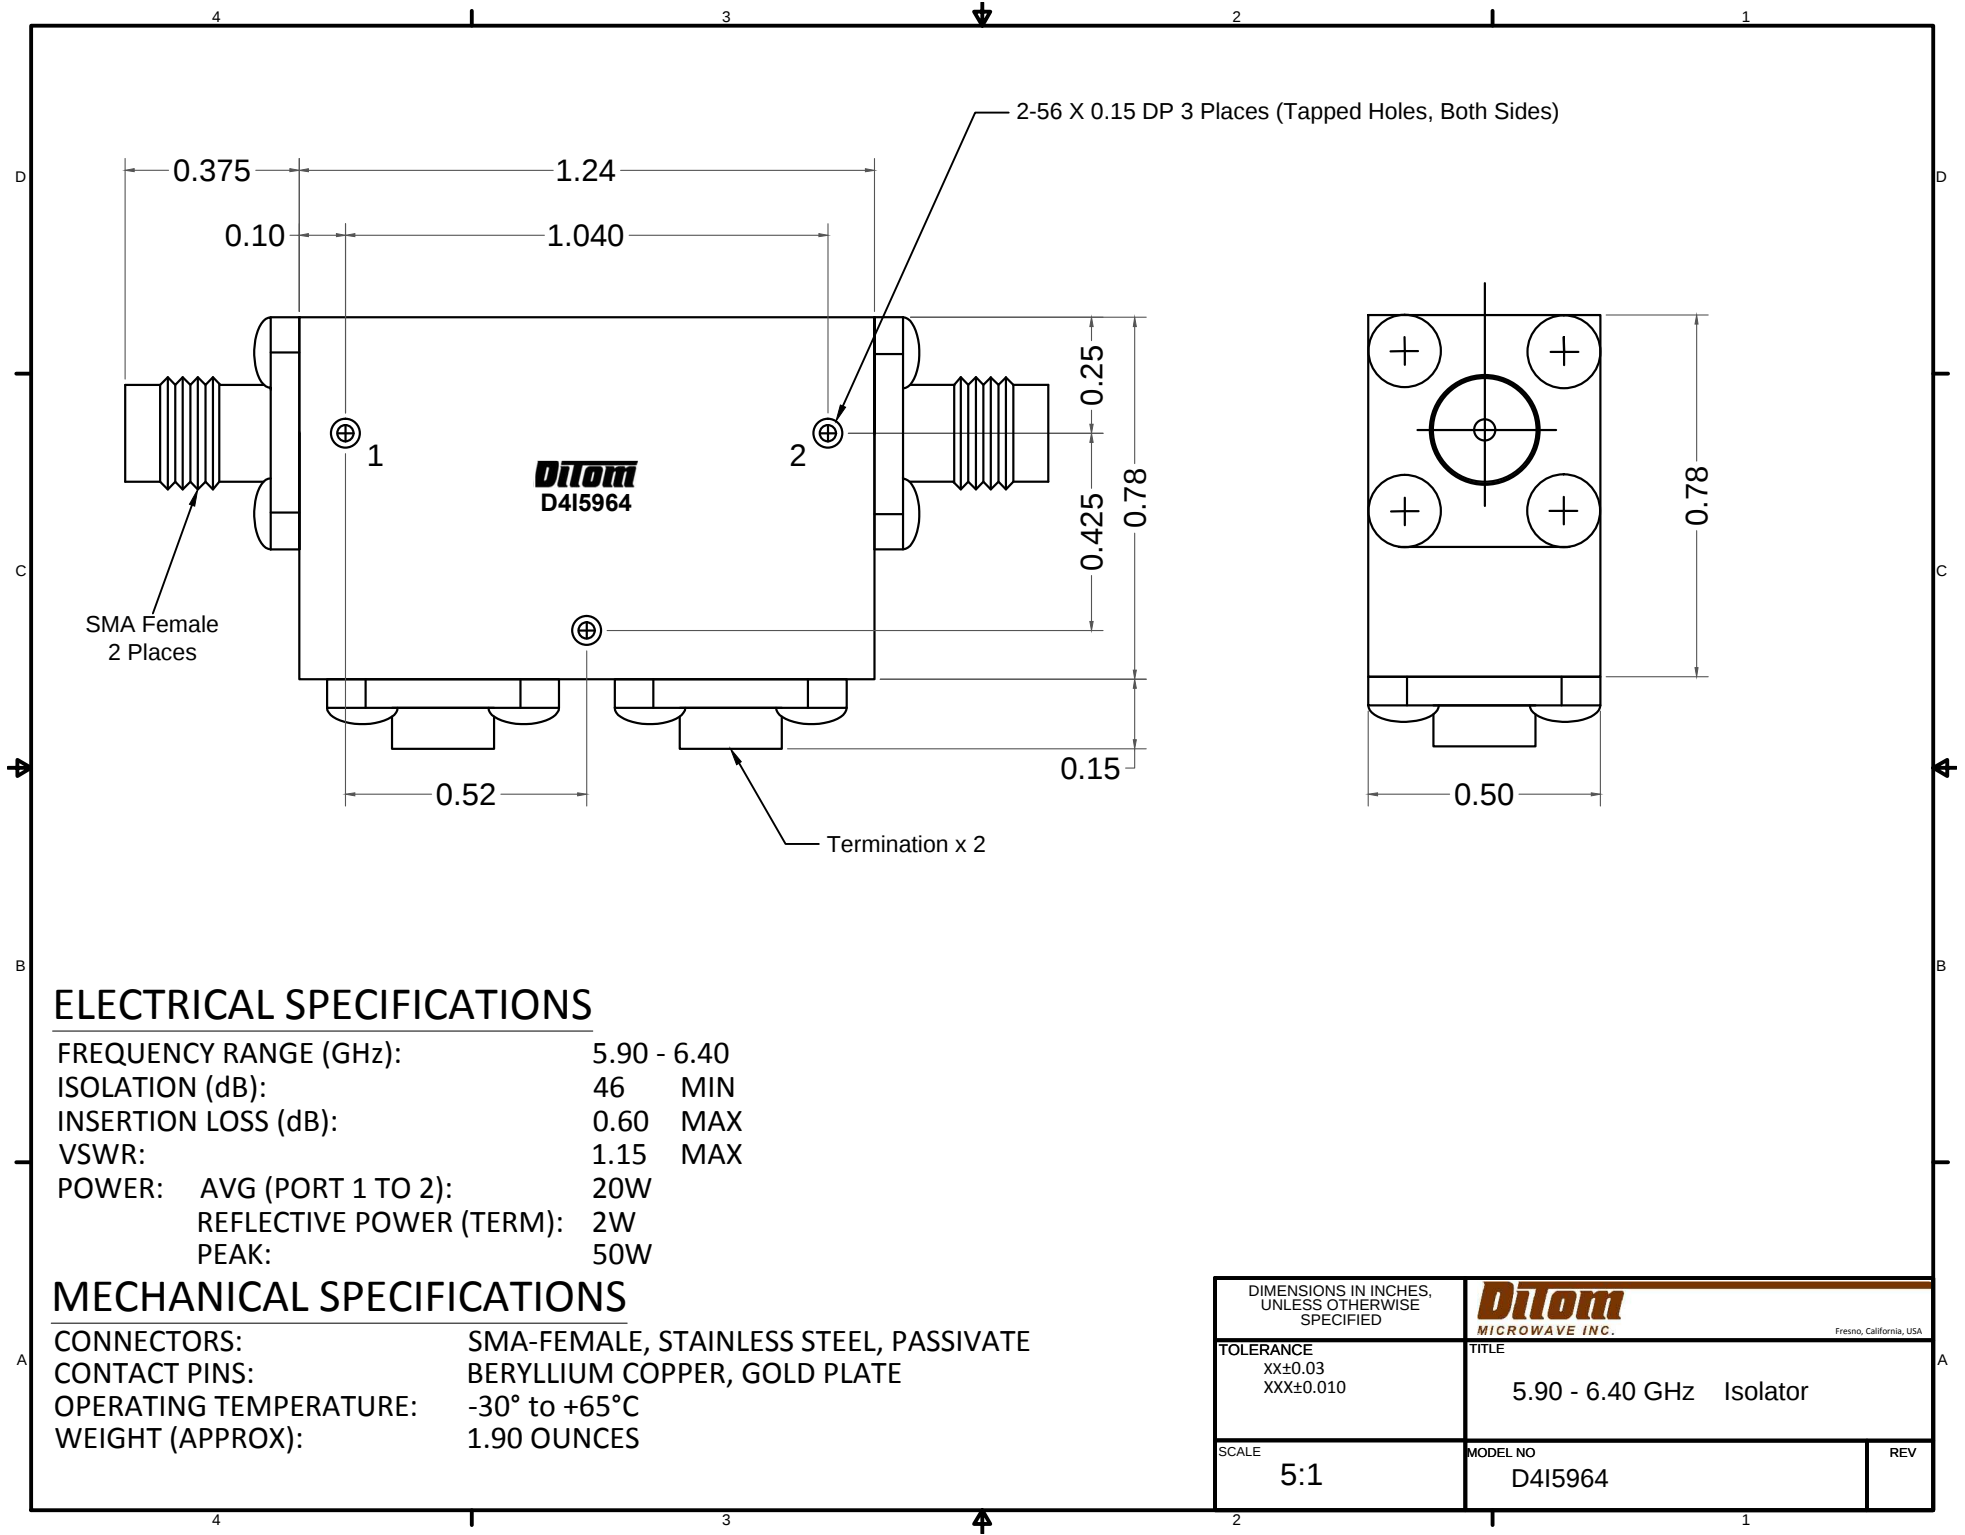

ELECTRICAL SPECIFICATIONS

FREQUENCY RANGE (GHz):	5.90 - 6.40
ISOLATION (dB):	46 MIN
INSERTION LOSS (dB):	0.60 MAX
VSWR:	1.15 MAX
POWER: AVG (PORT 1 TO 2):	20W
REFLECTIVE POWER (TERM):	2W
PEAK:	50W

MECHANICAL SPECIFICATIONS

CONNECTORS:	SMA-FEMALE, STAINLESS STEEL, PASSIVATE
CONTACT PINS:	BERYLLIUM COPPER, GOLD PLATE
OPERATING TEMPERATURE:	-30° to +65°C
WEIGHT (APPROX):	1.90 OUNCES