

REVISIONS


ZONE

REV

DESCRIPTION

DATE

APPROVED

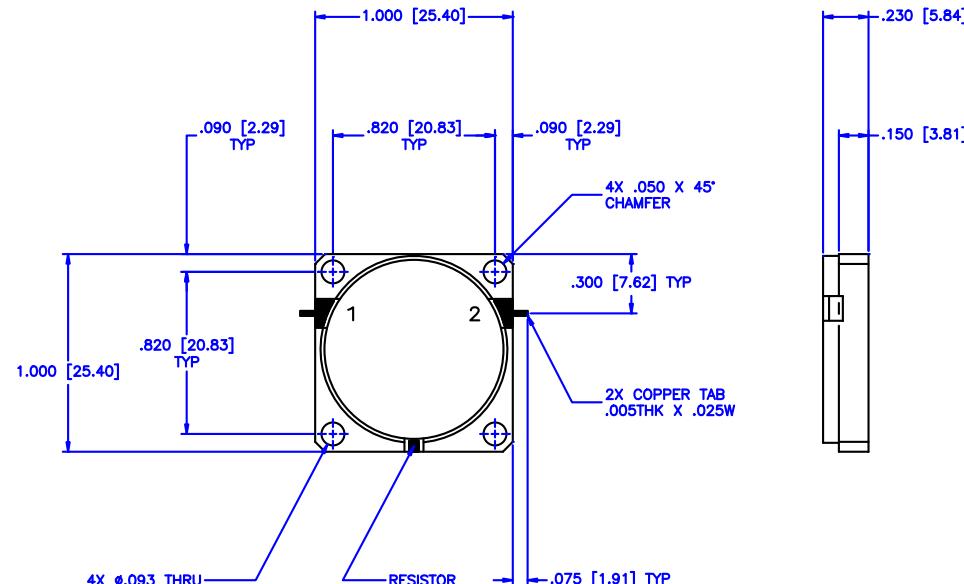

SPECIFICATIONS

Frequency Range: .935-.960 GHz
 Insertion Loss: 0.4dB Max.
 Isolation: 20dB Min.
 VSWR: 1.22:1 Max.
 Impedance Nominal: 50 Ohms
 Power Rating: 5 Watts
 Operating Temperature: -45°C to +85°C
 Storage Temperature: -55°C to +100°C

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
				SHEET: N/A
		DRAWING TITLE: DROP-IN ISOLATOR		
DRAWN: Paiboon Luekhamhan		PART NO. DI-1		
APPROVED: T. Nguyen		CAGE CODE: 0D2L5		SIZE: A REV: N/A DWG NO. 82124
				DO NOT SCALE THE DRAWING