

SMA-M CRIMP RG316DS

SC7067

SPECIFICATIONS

ELECTRICAL:

FREQUENCY: DC-12.4 GHZ
VSWR 1.21 MAX @ 12.4GHZ
IMPEDANCE: 50 OHMS
VOLTAGE RATING: 335 VOLTS MAX


OP. TEMP RANGE: -65°C to +165°C

MECHANICAL:

MATERIAL BODY: PASS. STAINLESS STEEL
CENTER CONTACT: BRASS
CONTACT PLATING: Au 30µ" min
INSULATOR: TEFLON
CRIMP FERRULE: Ni PLATED BRASS
INTERFACE: MIL-STD-348A

RECOMMENED TORQUE: 7-10 in-lbs
CRIMP SIZE: CONTACT: 0.92(.036) SQ. CRIMP TOOL
FERRULE: 3.9(.154) HEX. CRIMP TOOL

ROHS COMPLIANT

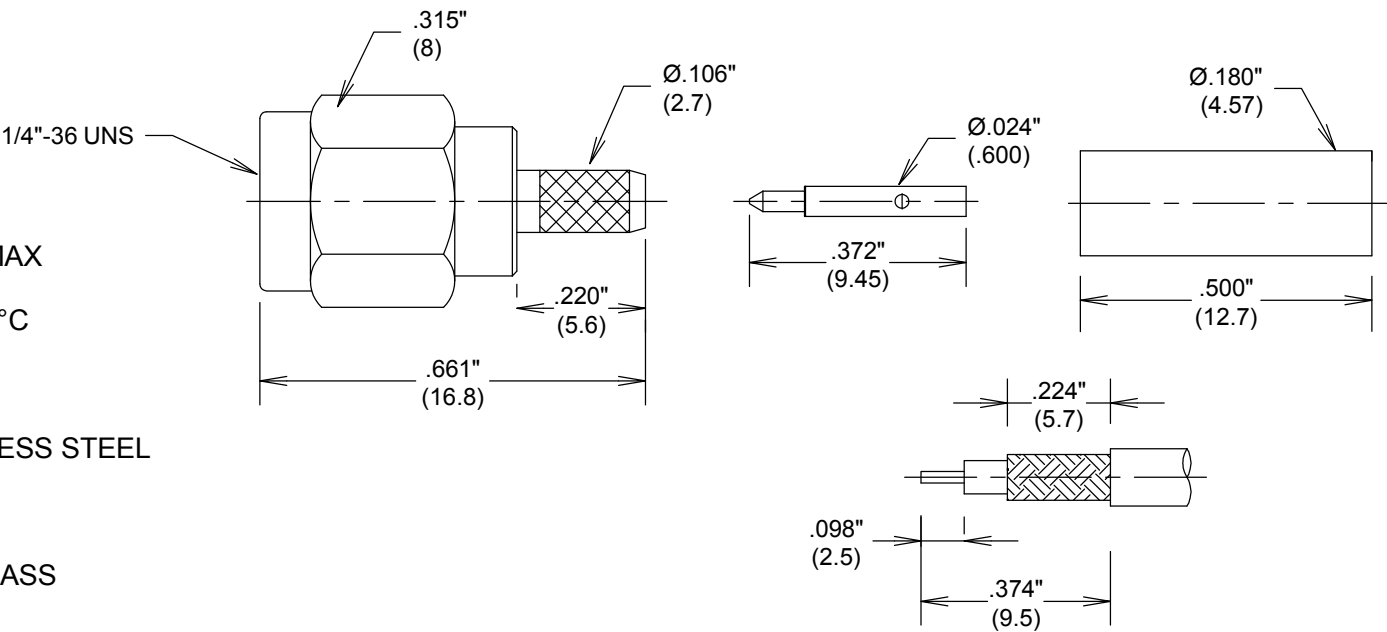

STRIPPING DIMENSIONS

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

SMA-M CRIMP RG316DS

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SC7067	--
SCALE		SHEET	

ALL DIMENSIONS IN inches(mm) Typical