




2.5 kW Oil cooled



Standards
NF C 96-315
MIL-DTL-39030



Impedance	50 $\Omega \pm 5\%$
Frequency	DC – 1 GHz (on request DC – 2.5 GHz)
Max VSWR	≤ 1.10 at 1 GHz
Temperature range	-25 to +110°C
Average power @ 25°C	2.5 kW
Cooling	Natural air convection
Weight	32 kg

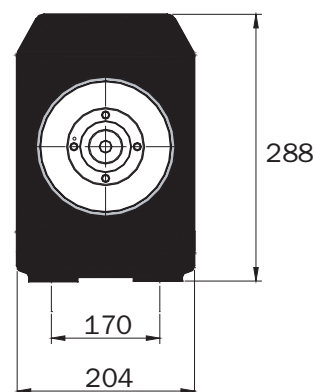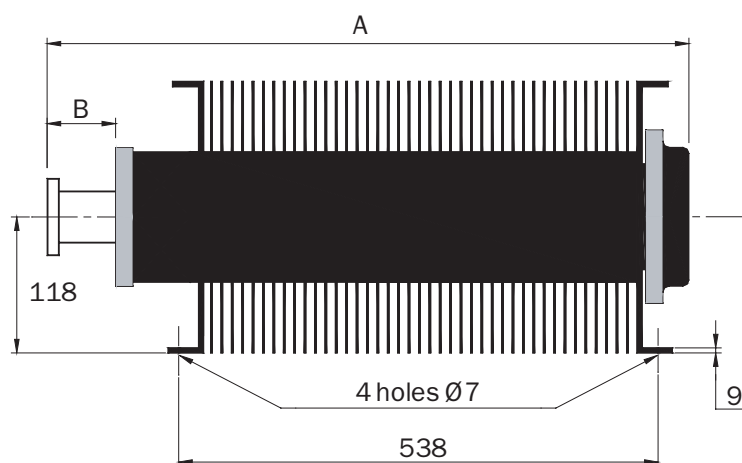

Dimensions in mm

P/N	Connector	A	B	C
17-0328	7-16 f	694.5	43	112
17-0563**	7-16 f	694.5	43	112
17-5241	EIA 7/8"	687.5	53.5	105
17-0542**	EIA 7/8"	687.5	53.5	105
17-5238	EIA 1.5/8"	711	77	128.5
17-0081*	EIA 1.5/8"	711	77	128.5
17-0359**	EIA 1.5/8"	711	77	128.5
17-3184	EIA 3.1/8"	727	93	144.5

* Thermoswitch 90°C

** Thermoswitch 160°C

Option VSWR ≤ 1.05 470 to 860 MHz for digital applications