


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

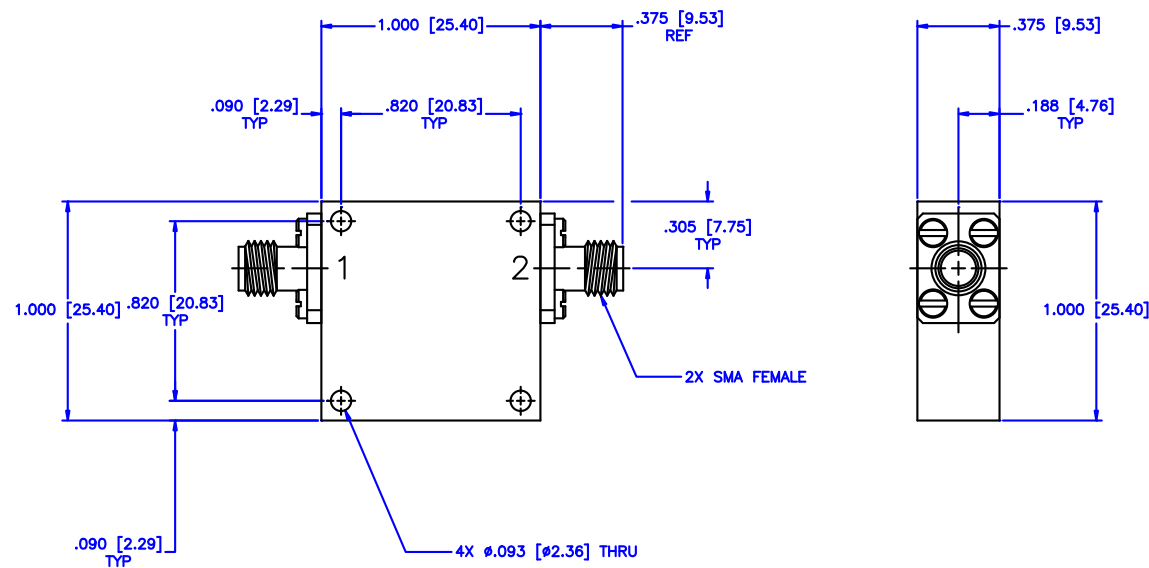

SPECIFICATIONS

Frequency Range: 0.89–0.91 GHz

Isolation: 20dB Min.

Insertion loss: 0.35dB Max.

VSWR: 1.22:1 Max.

Power Avg, Peak: 25W, 250W

Operating Temperature: –54°C to +85°C

MATERIAL:				MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A	
				UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: COAXIAL ISOLATOR	
DRAWN: Pai boon Luethamhan		DATE: 08-25-2000		PART NO. IS-32		SHEET: N/A	
APPROVED: T. Nguyen		DATE: 08-25-2000				DWG NO. 82096	
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE: 0D2L5		SIZE: N/A REV: N/A DO NOT SCALE THE DRAWING	