

TERMINATION BNC

UP TO 4.0 GHz
10 WATTS



MODELS: TBXXXM-10W, TBXXXF-10W

SPECIFICATIONS:

Electrical:



Frequency Range _____ DC - 4.0 GHz
Standard Freq. Values _____ 2.5 & 4.0 GHz
VSWR: _____ 1.25:1 Max.
Input Power _____ 10 Watts @+25°C
Derated Linearly to 2 Watts @+125°C
Peak Power _____ 500 Watts Max.
(5uSec Pulse, .05% Duty Cycle)
Impedance _____ 50 Ohms
Temperature Range _____ -65°C to +125°C

Mechanical:

BNC Connectors _____ Nickel Plated Brass
Mates with MIL-STD-348
Conductors _____ Gold Plated Beryllium Copper or Brass
Housing _____ Anodized Aluminum

Model Number: **TBXXXM-10W**
BNC Male Connector

Model Number: **TBXXXF-10W**
BNC Female Connector

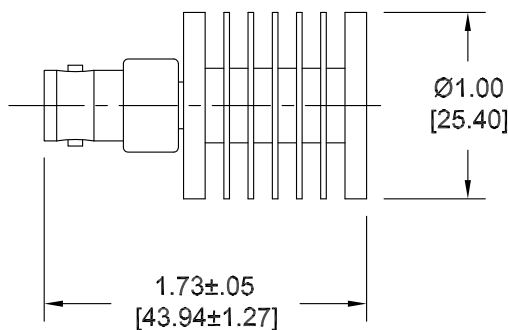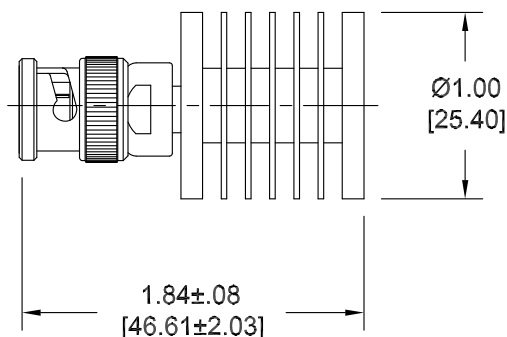

HOW TO ORDER:

Model Number: **TBXXXY-10W**

Freq. Range _____ Connector Config.
020 = DC - 2.5 GHz M = Male
040 = DC - 4.0 GHz F = Female
080 = DC - 8.0 GHz

Ordering Examples:

Model Number: **TB040M-10W**
BNC Male; DC - 4.0 GHz

Model Number: **TB020F-10W**
BNC Female; DC - 2.0 GHz

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
Design specifications are subject to change without notice.
Contact factory for technical specifications before purchasing or use.