



CONTACT: BREAK BEFORE MAKE
ACTUATOR: FAILSAFE
SWITCHING SPEED: 20 mSEC MAX

ACTUATOR VOLTAGE: 28.0 Vdc (23.0–33.0 Vdc)
ACTUATOR CURRENT: 0.100 A MAX @ 28.0 Vdc
POWER HANDLING: 200W CW @ 1.0 GHz

OPERATING TEMP: -54° C TO +90° C
SINE VIBRATION: 30 G'S rms
LIFE: 1,000,000 CYCLES
RANDOM VIBRATION: 20 G'S rms

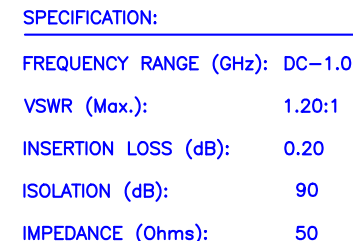

FAILSAFE, SUPPRESSION DIODE

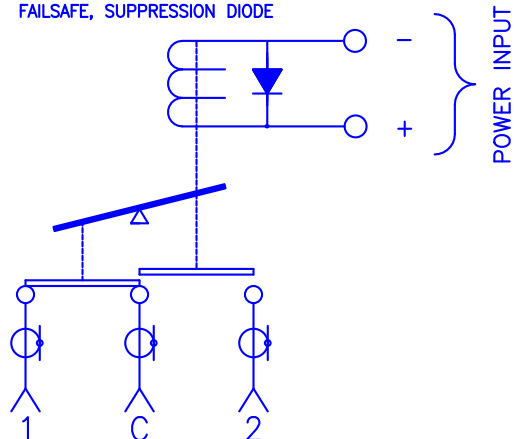

REVISIONS			
ZONE	REV	DESCRIPTION	APPROVED
SOLDERING TERMINALS .255 [6.48] TYP .200 [5.08] 1.150 [29.21] .510 [12.95] 1.20 [30.48] + -			
SPECIFICATION: FREQUENCY RANGE (GHz): DC-1.0 VSWR (Max.): 1.20:1 INSERTION LOSS (dB): 0.20 ISOLATION (dB): 90 IMPEDANCE (Ohms): 50			