

# Surface Mount RF Transformer

75Ω 4.5 to 3000 MHz


## Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	0.25W
DC Current	30mA
Permanent damage may occur if any of these limits are exceeded.	


## Pin Connections

PRIMARY DOT	6
PRIMARY	4
SECONDARY DOT	1
SECONDARY	3
NOT USED	2

## Outline Drawing AT224-1

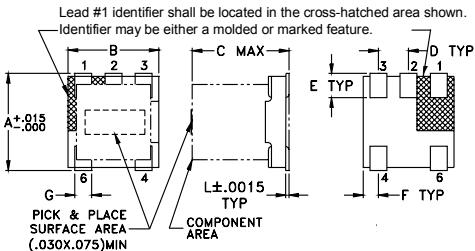

### PCB Land Pattern




## Outline Dimensions (inch mm)

A	B	C	D	E	F
.150	.150	.160	.050	.040	.025
3.81	3.81	4.06	1.27	1.02	0.64

G	H	J	K	L	wt
.028	.065	.190	.030	.007	grams
0.71	1.65	4.83	0.76	0.18	0.15

## Config. G

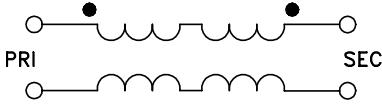

## Features

- wideband, 4.5 to 3000 MHz
- balanced transmission line
- good return loss
- excellent amplitude unbalance, 0.7 dB typ. and phase unbalance, 2 deg typ. in 1 dB bandwidth
- plastic base with leads
- aqueous washable

## Applications

- balanced to unbalanced transformation
- push-pull amplifiers
- PCS/DCS
- MMDS



CASE STYLE: AT224-1  
PRICE: \$0.99 ea. QTY (100)

\*Addition of Top hat™ feature

### Benefits

- Allows faster pick-and-place
- Enables visual identification marking

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

## Electrical Specifications (T<sub>AMB</sub> = 25°C)



Ω RATIO	FREQUENCY (MHz)	INSERTION LOSS*			PHASE UNBALANCE (Deg.) Typ.		AMPLITUDE UNBALANCE (dB) Typ.	
		3 dB MHz	2 dB MHz	1 dB MHz	1 dB bandwidth	2 dB bandwidth	1 dB bandwidth	2 dB bandwidth
1	4.5-3000	2000-3000	1000-2000	4.5-1000	2	3	0.7	0.5

\*Insertion Loss is referenced to mid-band loss, 0.5 dB typ.

Available Tape and Reel at no extra cost	
Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500
13"	1000, 2000

## Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE (Deg.)
4.50	0.31	29.45	1.10	5.08
10.00	0.29	29.98	0.90	2.60
50.00	0.30	33.14	0.88	0.06
100.00	0.33	34.00	0.91	0.32
500.00	0.55	21.95	0.65	0.81
1000.00	0.71	16.13	0.61	2.12
1500.00	0.96	13.75	0.21	1.23
2000.00	1.19	12.82	0.30	0.38
2500.00	1.63	10.98	0.47	4.03
3000.00	2.39	8.36	0.49	8.50

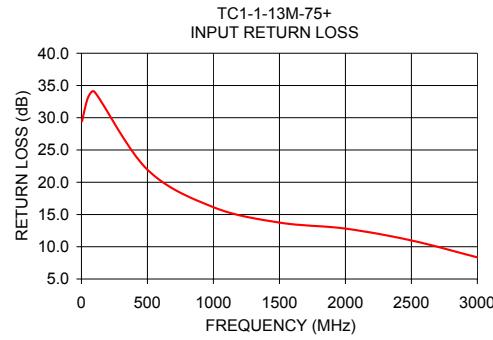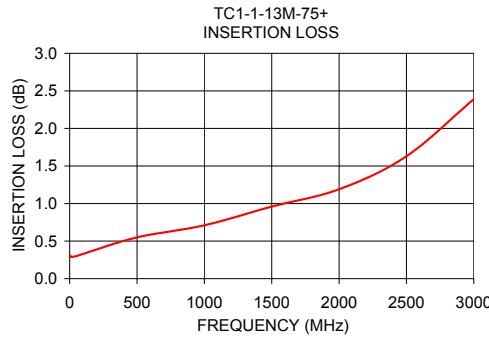

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

TC1-1-13M-75+  
Upgraded Version\*

TC1-1-13M-75+