



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

4500 MHz Ceramic Bandpass Filter

Part Number: AM4500B1126



Electrical specifications

Center Frequency: 4500 MHz

Bandwidth: $F_0 \pm 240$ MHz

VSWR: 1.7 : 1 dB max

Input / Output Impedance: 50 Ohms

Passband: 4380-4620 MHz

Passband Insertion Loss: 3.0 dB max

Passband Ripple: 1.0 dB max

Rejection: 8 dB min at $F_0 \pm 300$ MHz

Power Handling: 3 watt max

Mechanical

Mounting Method: SMT

Dimensions: 26.4 x 14 x 4.65 mm


Environmental

Operating Temperature: -20°C to 70°C

Storage Temperature: -50°C to +90°C

This product is RoHS compliant.

Outline Drawing:

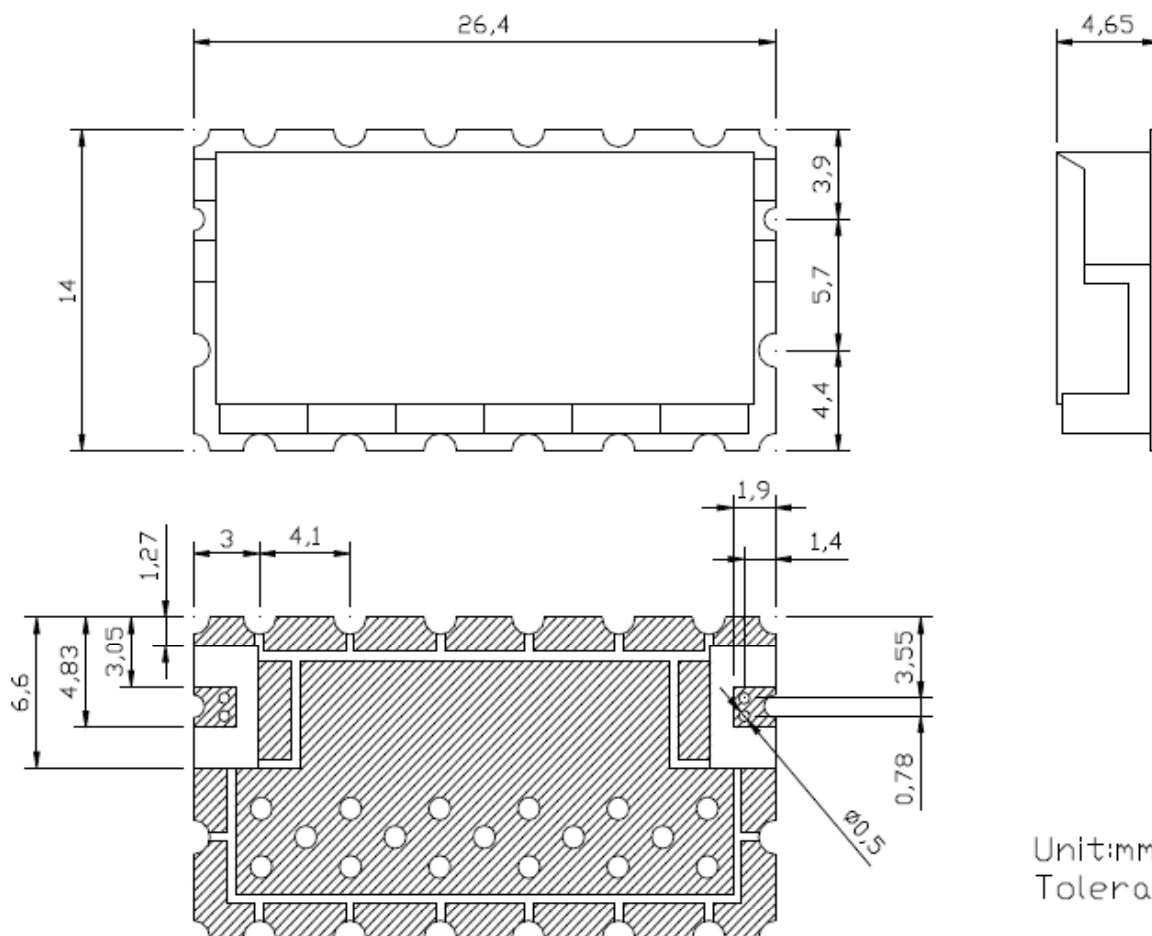

Unit:mm
Tolerance:±0.3