



Medium Power 50 Watts RF Load Up To 18 GHz With SMA
Female Input Square Body Black Anodized Aluminum Heatsink

TECHNICAL DATA SHEET

PE6040

Configuration

Connector	SMA Female
Connector Specification	MIL-STD-348
Heat Sink	Black Anodized Aluminum Heatsink
Connection Method	Standard
Body Style	Straight

Electrical Specifications

Frequency Range, GHz	DC to 18
Impedance, Ohms	50
Maximum VSWR	1.45:1
Maximum Input Power, Watts	50
Peak Power, Watts	500

Mechanical Specifications

Temperature

Operating Range, deg C	-65 to +125
------------------------	-------------

Size

Length, in [mm]	3.36 [85.34]
Width/Dia., in [mm]	3.5 [88.9]
Height, in [mm]	2.65 [67.31]

Connector

Type	SMA Female
Inner Conductor Material and Plating	Beryllium Copper, Gold
Body Material and Plating	Passivated Stainless Steel
Dielectric Type	PTFE

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes
REACH Compliant	06/18/2012

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Medium Power 50 Watts RF Load Up To 18 GHz With SMA Female Input Square Body Black Anodized Aluminum Heatsink PE6040](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



Medium Power 50 Watts RF Load Up To 18 GHz With SMA
Female Input Square Body Black Anodized Aluminum Heatsink

TECHNICAL DATA SHEET

PE6040

Plotted and Other Data

Notes:

Values at 25 °C, sea level

Medium Power 50 Watts RF Load Up To 18 GHz With SMA Female Input Square Body Black Anodized Aluminum Heatsink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Medium Power 50 Watts RF Load Up To 18 GHz With SMA Female Input Square Body Black Anodized Aluminum Heatsink PE6040](http://www.pasternack.com/50-watts-sma-female-rf-load-up-to-18-ghz-pe6040-p.aspx)

URL: <http://www.pasternack.com/50-watts-sma-female-rf-load-up-to-18-ghz-pe6040-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE6040 CAD Drawing

Medium Power 50 Watts RF Load Up To 18 GHz With SMA
Female Input Square Body Black Anodized Aluminum Heatsink

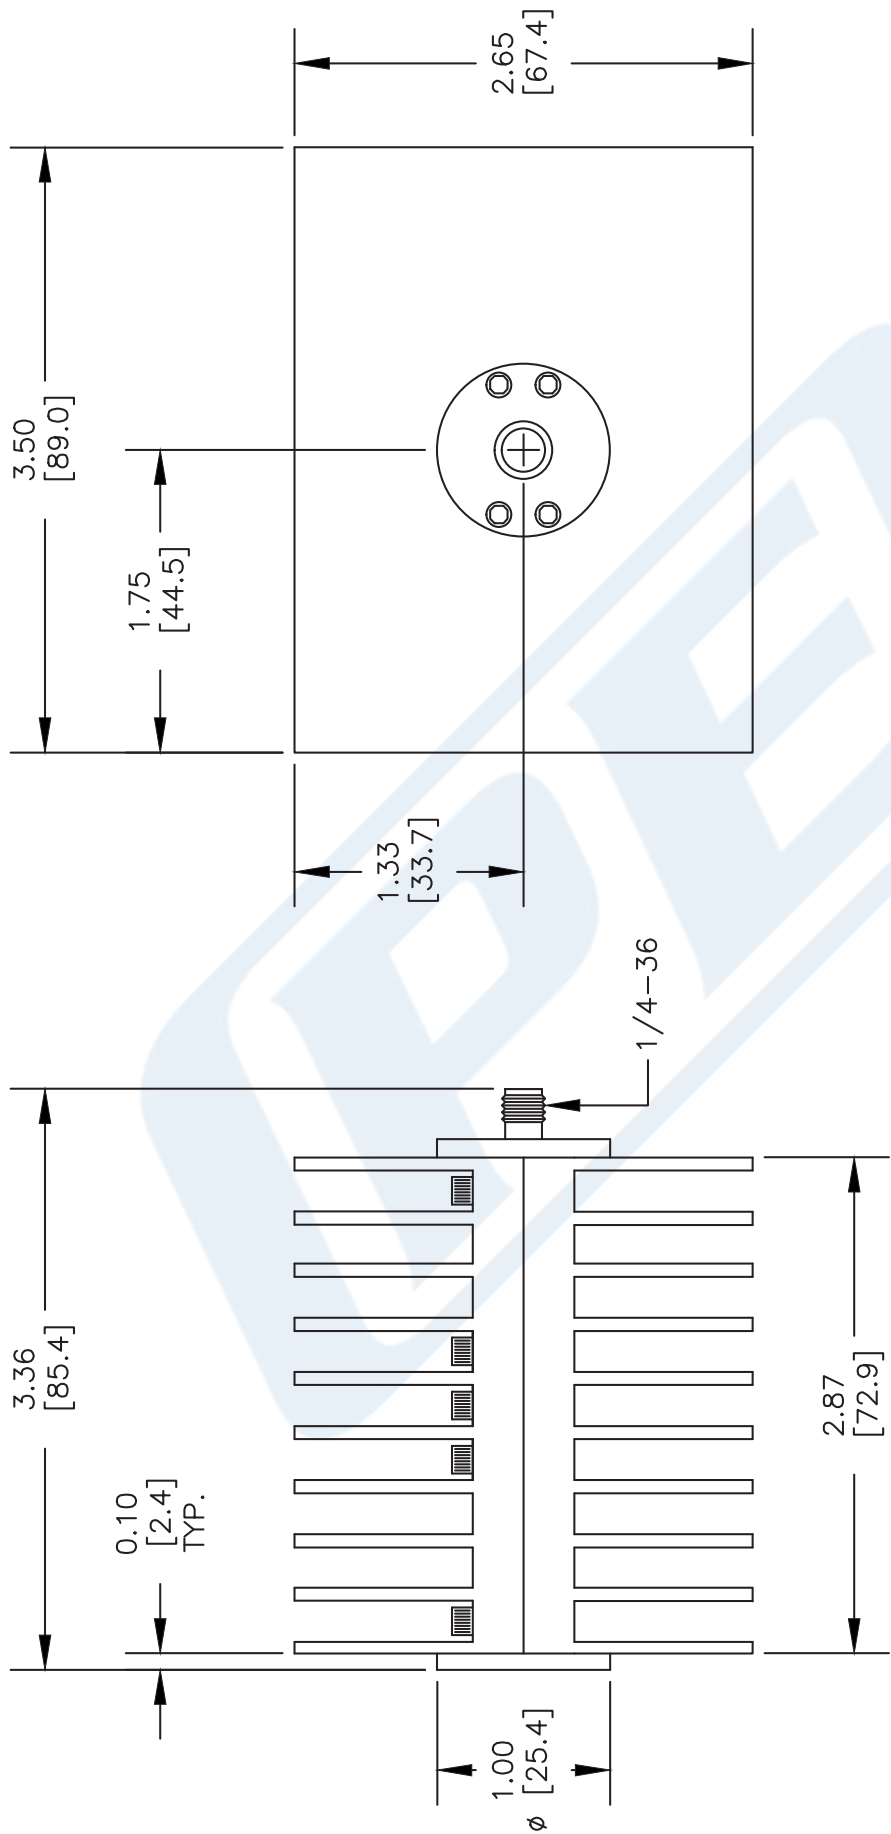

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE6040

REV. A
FSCM NO. 53919

127

SIZE A

SCALE N/A

CAD FILE 022013-A

PE PASTERNAK®

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com