

REVISIONS		DATE	APPROVED
ZONE	REV.	DESCRIPTION	DATE
-	-	ORIGINAL RELEASE	9/28/09

Description:
 Low Noise Amplifier designed for Military and Industrial applications. This amplifier is supplied in our standard PE2 housings in a cascade layout that can be used as a SMA connectorized or a surface mount component. Other packages and connector types are available.

This model provides the following performance. Data is available upon request.

Specifications:

- Frequency Range: 0.25 to 18.0 GHz
- Gain: 60dB Typ.
- Gain Flatness: +/-1.75dB Max.
- Noise Figure: 5.0dB Typ.
- OP1dB: 13dBm Min.
- VSWR Input/Output: 2.0:1 Max.
- DC Voltage Supply: +12 to +15VDC
- DC Current Draw: 280mA Max.

Features:

- Internal Voltage Regulation
- Unconditional Stability
- Standard Operating Temperature -20 to +70 Deg. C


Available Options:

- Various Package types
- Various Connector types
- Temperature Compensation
- Hermetic Sealing
- Gain and Phase Matching
- MIL-STD-883 Screening Available

Environmental Ratings:

- Temperature: -20 to +70 Deg. C (Operating) ; -55 to +85 Deg C Available)
- 55 to +125 Deg. C (Storage)
- Humidity: MIL-STD-202F, METHOD 103B COND B.
- Shock: MIL-STD-202F, METHOD 213B COND B.
- Altitude: MIL-STD-202F, METHOD 105C COND B.
- Temperature Cycle: MIL-STD-202F, METHOD 107D COND A

Note: The above specifications are subject to change or revision.

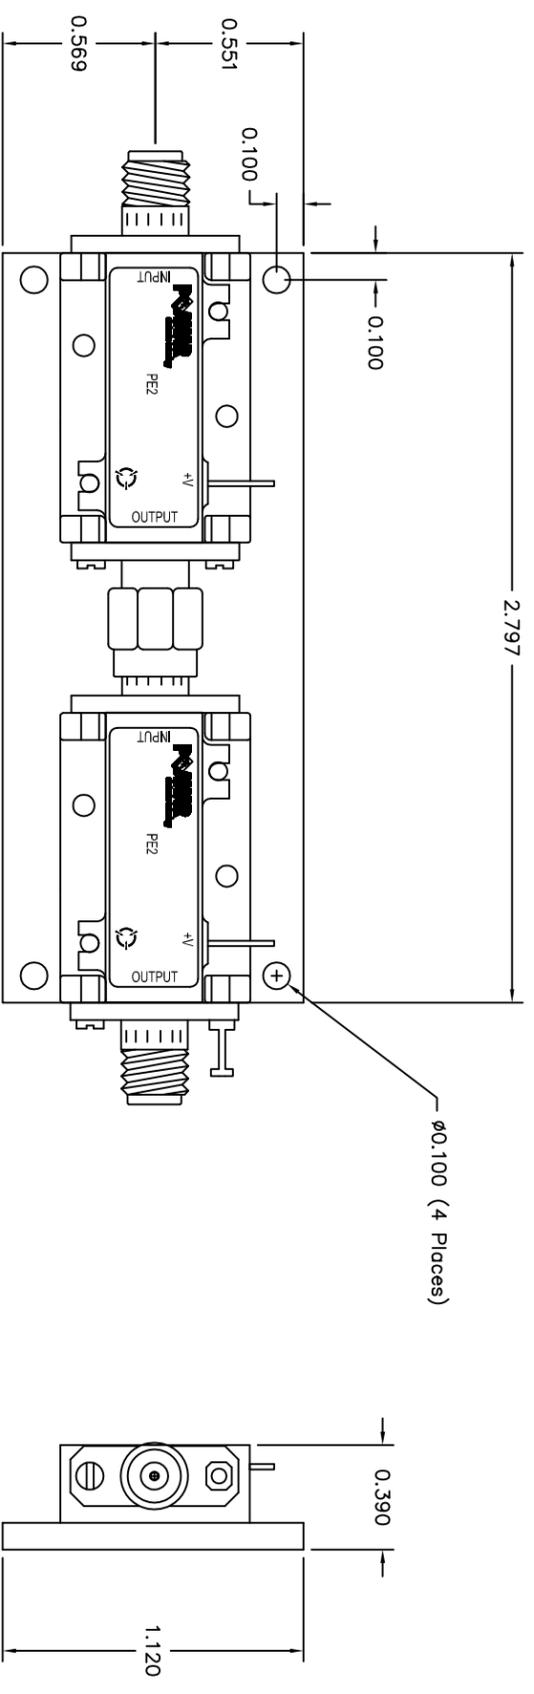

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN INCHES
 TOLERANCES ARE:
 FRACTIONS DECIMALS ANGLES
 ± .XX ± 0.010 ±
 .XXX ± 0.005

PART NO.	APPROVALS	DATE	5715 Industry Lane, Unit 11 FREDERICK, MARYLAND
	DRAWN K. Mason	9/28/09	
MATERIAL: 6061-T6 Aluminum	CHECKED	ISSUED	PRODUCT FEATURE PE2-60-0R2518R0-SR0-15-12-SFF-WEB SIZE CAGE CODE B 1LK53 DWG NO. WEB - MODEL SCALE N/A SHEET 1 OF 1
FINISH: Gold Plate over Nickel	DO NOT SCALE DRAWING		