



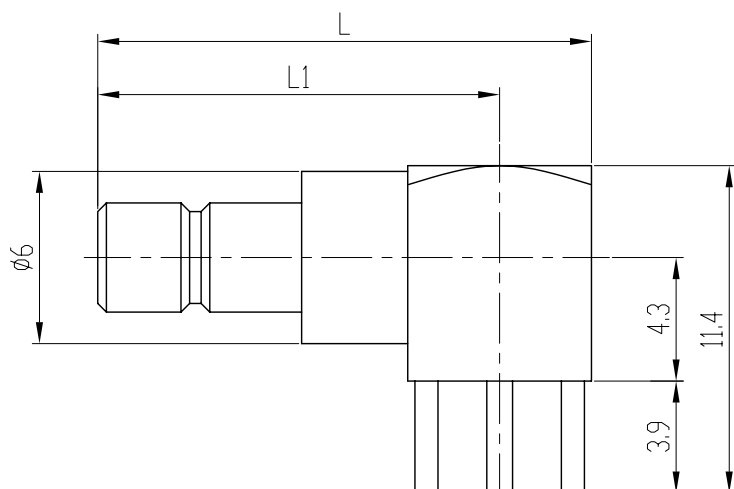

安装开孔
mounting hole



产品型号 type	L	L1
SMB-JWHD	15.5	12.3
SMB-JWHD1	21.6	18.4
SMB-JWHD2	13.7	10.5
SMB-JWHD10	15.5	12.3

Electrical Characteristics:

- Characteristic Impedance: 50 Ω
- Frequency range: DC~4Ghz
- Contact resistance
Center conductor: $\leq 6.0 \text{ m}\Omega$
Out conductor: $\leq 1.0 \text{ m}\Omega$
- Insulation resistance: $\geq 1000 \text{ M}\Omega$
- Insulator withstanding: 750V
- Durability: 500cycles

主要性能指标:

- 特性阻抗: 50 Ω
- 频率范围: DC~4Ghz
- 接触电阻:
中心导体: $\leq 6.0 \text{ m}\Omega$
外导体: $\leq 1.0 \text{ m}\Omega$
- 绝缘电阻: $\geq 1000 \text{ M}\Omega$
- 介质耐压: 750V
- 插拔次数: 500次

Application: MIL-C-39012/68A

执行标准: MIL-C-39012/68A

Material&Finishing

- Center contact:
Male: phosphor bronze, gold plated
- Body: brass, gold plated
- Insulators: PTFE

材料和镀层

- 中心接触件:
插针: 锡磷青铜, 镀金
- 壳体: 黄铜, 镀金
- 绝缘子: 聚四氟乙烯

		SCALE	
		4:1	
	NAME	DATE	
DRAWN			
CHECKED			
APPROVED			

SMB-JWHD
RF COAXIAL CONNECTOR

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE mm, TOLERANCES ARE
FRACTIONS DECIMALS ANGLES
.X $\pm$.15 $\pm 1^\circ$
.XX $\pm$.05
.XXX $\pm$

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO.,LTD.