




This document contains proprietary information and such information may not be disclosed to others for any purposes, nor used for sales/marketing/procurement purposes without written permission

本文件包含专有信息，没有书面许可，该信息不能以任何形式披露给第三方，也不能用于任何目的的买卖、销售及采购。

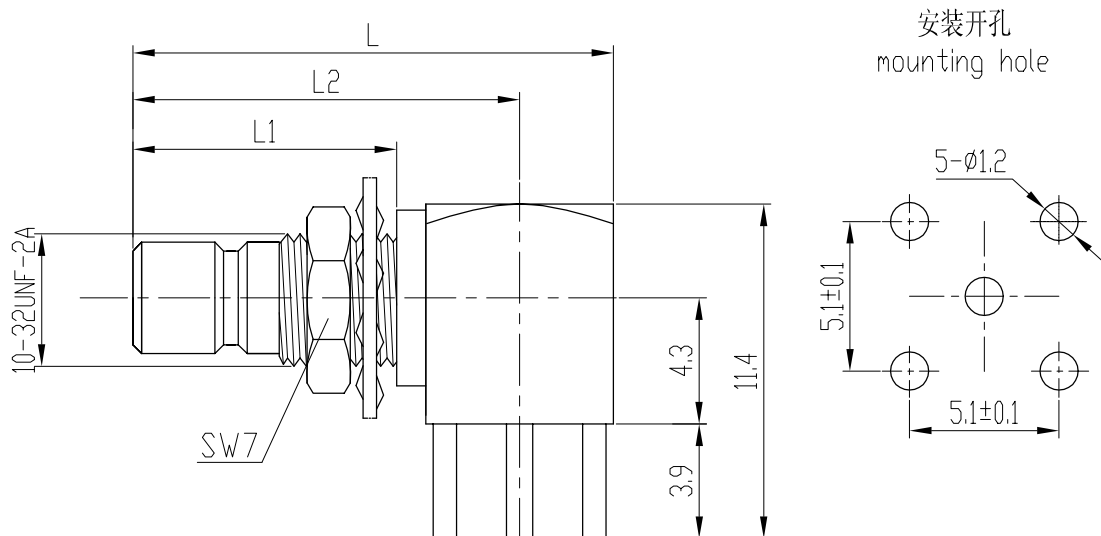

产品型号 type	L	L1	L2	备注 remark
SMB-JWHY	17.9	10.5	14.7	
SMB-JWHY1	21.6	14.2	18.4	
SMB-JWHY2	21.6	14.2	18.4	配双螺母 double nut

Electrical Characteristics:

- Characteristic Impedance: 50 Ω
- Frequency range: DC~4Ghz
- Contact resistance
Center conductor: $\leq 6.0 \text{ m}\Omega$
Out conductor: $\leq 1.0 \text{ m}\Omega$
- Insulation resistance: $\geq 1000 \text{ M}\Omega$
- Insulator withstanding: 750V
- Durability: 500cycles

Application: MIL-C-39012/68A

Material&Finishing

- Center contact:
Male: phosphor bronze, gold plated
- Body: brass, gold plated
- Insulators: PTFE

主要性能指标:

- 特性阻抗: 50 Ω
- 频率范围: DC~4Ghz
- 接触电阻:
中心导体: $\leq 6.0 \text{ m}\Omega$
外导体: $\leq 1.0 \text{ m}\Omega$
- 绝缘电阻: $\geq 1000 \text{ M}\Omega$
- 介质耐压: 750V
- 插拔次数: 500次

执行标准: MIL-C-39012/68A

材料和镀层

- 中心接触件:
插针: 锡磷青铜, 镀金
- 壳体: 黄铜, 镀金
- 绝缘子: 聚四氟乙烯

	SCALE	4:1	SMB-JWHY RF COAXIAL CONNECTOR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X $\pm$.15 $\pm 1^\circ$.XX $\pm$.05 .XXX $\pm$
	NAME			
DRAWN			西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.	
CHECKED				
APPROVED				