
# PRODUCT SPECIFICATION



66,67,6805 SERIES

### **SPECIFICATIONS**

#### FEATURES

- Type SMA Connectors Standard
- Options from DC to 18 GHz
- High Performance, Trough line Style Structure
- Military Grade Materials and Processing
- -40 to + 125°C Operating Temperature Range

| Model   | 6605  | 6705  | 6805  | 6705K   |
|---|-------|-------|-------|---------|
| Frequency Range (GHz)                             | DC-18 | DC-18 | DC-18 | DC-26.5 |
| Phase Shift, min (°/GHz)                          | 40    | 40    | 40    | 40      |
| Phase Shift, min (°/GHz/Shaft Turn)               | 1.5   | 1.5   | 1.5   | 1.5     |
| Insertion Phase, nom at Min Phase Setting (°/GHz) | 140   | 140   | 150   | 130     |
| Number of Turns, min                              | 26    | 26    | 26    | 26      |
| VSWR max  |       |       |       |         |
| DC to 18 GHz                                      | 1.60  | 1.60  | 1.60  | 1.60    |
| 18 to 26.5 GHz                                    | NA    | NA    | NA    | 2.00    |
| Insertion Loss, max (dB)                          |       |       |       |         |
| DC to 18 GHz                                      | 1.50  | 1.50  | 1.50  | 1.25    |
| 18 to 26.5 GHz                                    | NA    | NA    | NA    | 1.75    |
| Power   |       |       |       |         |
| Average (Watts)                                   | 100   | 100   | 100   | 100     |
| Peak (Watts)                                      | 1000  | 1000  | 1000  | 1000    |
| Time Delay, nom (nsec) @ Min Phase Setting        | 0.4   | 0.4   | 0.4   | 0.4     |
| Connectors  | SMA   | SMA   | SMA   | Κ       |
| Weight  |       |       |       |         |
| Ounces  | 2.5   | 3.75  | 3.0   | 3.75    |
| Grams   | 71    | 106   | 85    | 106     |

#### NOTES:

1. 1 Degree per GHz of Phase Shift equals 2.78 picoseconds of time delay.


2. Average and Peak Power are given at ambient temperature and altitude with Type SMA Connectors. Power is further limited by the power threshold level of selected connector style.




# PRODUCT SPECIFICATION

## **OUTLINE DRAWINGS**

**MODEL 6605** 

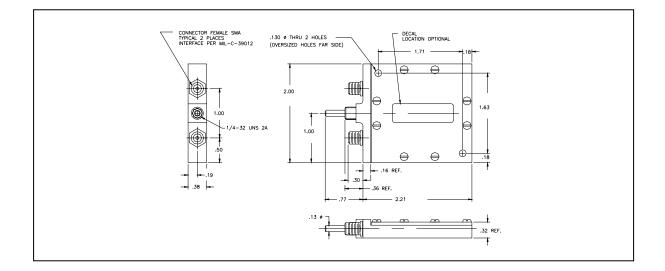

### **MODELS 6705, 6705K**

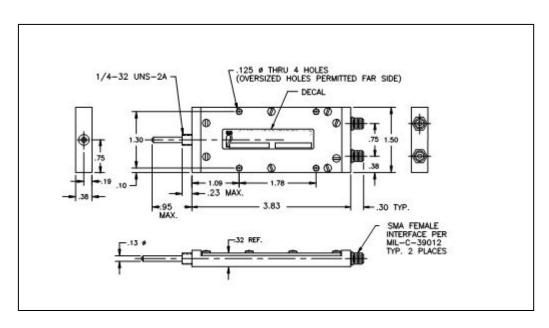




Spectrum Microwave ● 8 Executive Drive ● Hudson, NH 03051 Phone: 603-459-1600 ● Fax: 603.459.1605 www.SpectrumMicrowave.com

## PRODUCT SPECIFICATION

### PHASE SHIFTER DC TO 18, 26.5 GHz, COAXIAL

### **MODEL 6805**

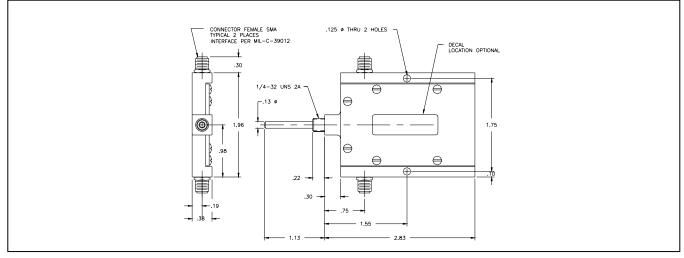

## **ORDERING INFORMATION**

### **DRIVE SHAFT AND CONNECTOR OPTIONS:**

- 1. Only the following standard control options are available. The base model is available without additional options.
- 2. Add suffix as designated below to the ordering model number.

| MODEL # PLUS | DESCRIPTION                            |
|--------------|--|
| -1           | Shaft Lock                             |
| -2           | Turns Counter With Built In Shaft Lock |
| -4           | Screw Driver Slot                      |
| -5           | Control Knob                           |
| -14          | Shaft Lock With Screw Driver Slot      |
| -15          | Shaft Lock With Control Knob           |

| (-1) SHAFT LOCK | (-2) TURNS COUNTER W/ SHAFT LOCK | (-5) CONTROL KNOB |
|-----------------|----------------------------------|-------------------|
|                 |                                  | D= 0.5" L=0.65    |

MISCELLANEOUS:

- 1. Spectrum Microwave "Standard Warranty and Order Terms and Conditions" apply to all orders.
- 2. All specifications subject to change without notice.
- 3. Check "Ordering and Availability Listing" for delivery and ordering information.
- 4. Contact our local Manufacturers Representative for pricing.



Specification Revision - 070710

Spectrum Microwave ● 8 Executive Drive ● Hudson, NH 03051 Phone: 603-459-1600 ● Fax: 603.459.1605 www.SpectrumMicrowave.com