
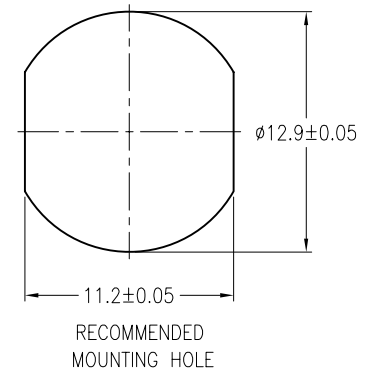
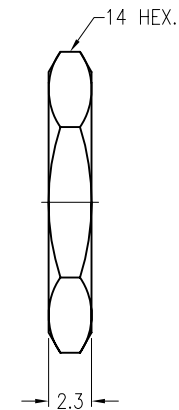
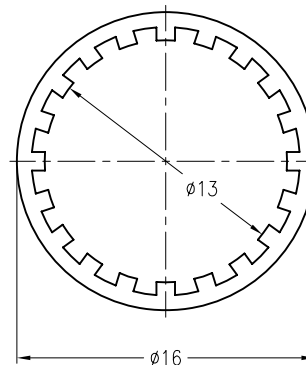


- NOTES:
- MATERIALS AND FINISHES(PLATING THICKNESS IN MICRO-INCHES):
BODY – BRASS, NICKEL PLATING
CONTACT – PHOSPHOR BRONZE, GOLD PLATING
INSULATOR – DELRIN
 - ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.
 - MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: – 40°C to +85°C

THIRD ANGLE PROJ.

REVISIONS				
REV	DESCRIPTION	DATE	ECO	APPR
A	RELEASE TO MFG.	22-Apr-09		SCOTT.H

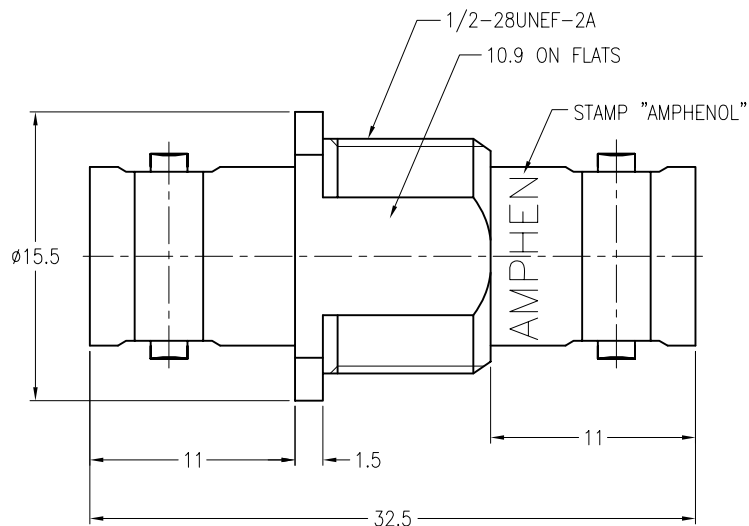

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: 0.5 – 6mm ±0.1mm 6 – 30mm ±0.2mm 30 – 120mm ±0.3mm ANGLES ±1°	MATERIAL	DRAWN S.XIE	DATE 21-Apr-09	TITLE BNC FEMALE TO FEMALE BULKHEAD ADAPTOR			Amphenol RF Danbury CT USA, Tainan Taiwan, Shenzhen China www.amphenolrf.com	
	REFERENCE	ENGINEER ROBIN	DATE 30-Oct-00				DRAWING NO.	31-220NB-DDRFX-ND3G
	FINISH	APPROVED SCOTT.H	DATE 21-Apr-09	SCALE: 2.5/1	SHEET	2 OF 2	ITEM NO.	017471AAF00ND5F
		CAD FILE F:\DWG\APL\CNPD\DDRF\31\220NB\ND3GSZ		DWG SIZE B	CODE ID 74868	REV A	PART NO.	