


剥线尺寸
stripping dimension

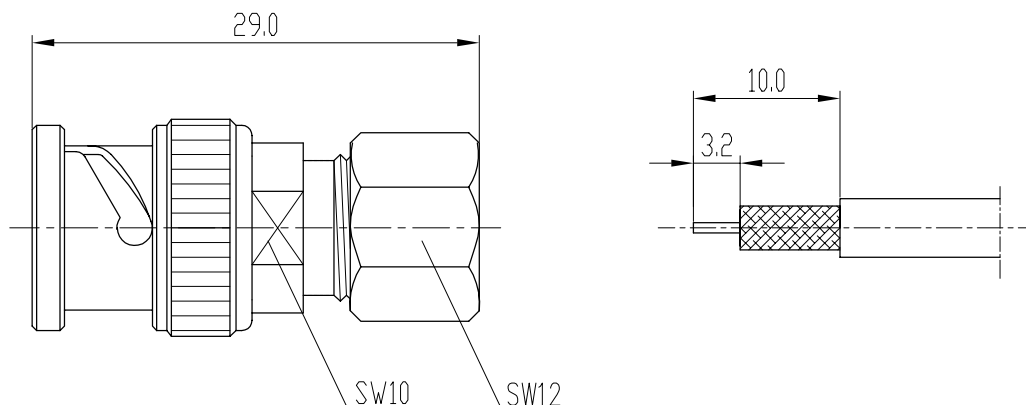

产品型号 type	电缆型号 cable type
BNC-J4	SFF-50-2-1
BNC-J5	SFF-50-3-1、RG141A/U、SYV-50-3

Electrical Characteristics:

1. Characteristic Impedance: $50\ \Omega$
2. Frequency range: DC~4Ghz
3. Contact resistance
Center conductor: $\leq 1.5\ m\Omega$
Out conductor: $\leq 0.2\ m\Omega$
4. Insulation resistance: $\geq 5000M\Omega$
5. Insulator withstanding: 1500V
6. VSWR: ≤ 1.5
7. Durability: 500cycles

Application: MIL-C-39012/16E

Material&Finishing

1. Center contact :
Male: brass, gold plated
2. Bodies and other metal parts:
brass, nickel plated
3. Insulators: PTFE

主要性能指标:

1. 特性阻抗: $50\ \Omega$
2. 频率范围: DC~4Ghz
3. 接触电阻:
中心导体: $\leq 1.5\ m\Omega$
外导体: $\leq 0.2\ m\Omega$
4. 绝缘电阻: $\geq 5000M\Omega$
5. 介质耐压: 1500V
6. 电压驻波比: ≤ 1.5
7. 插拔次数: 500次

执行标准: MIL-C-39012/16E

材料和镀层

1. 中心接触件:
插针: 黄铜, 镀金
2. 壳体和其它金属零件: 黄铜, 镀镍
3. 绝缘子: 聚四氟乙烯

				SCALE		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±
				1.5:1		
		NAME		DATE		BNC-J4 RF COAXIAL CONNECTOR
DRAWN						
CHECKED						
APPROVED						西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.