




Standards
NF C 96-315
MIL-DTL-39030

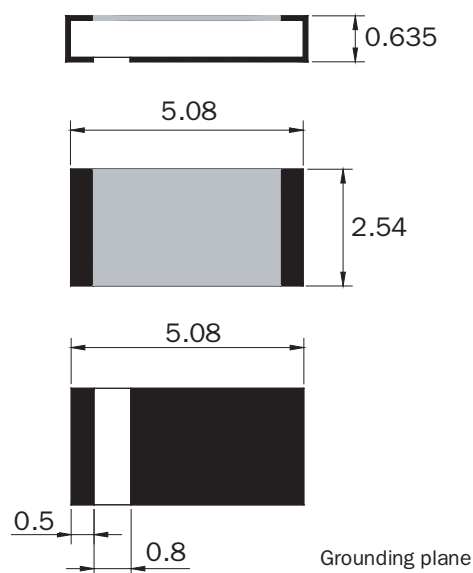

Substrate
Resistive film
Protection film
Contacts finition

AIN
Thick film
Epoxy
Tin over Nickel barrier



Dimensions in mm

P/N	Frequency (GHz)	Power (W)	Impedance ($\Omega \pm 5\%$)	Max VSWR
45-0040S	3	10	50	1.20

mm	inch
0.5	0.020
0.635	0.025
0.8	0.031
2.54	0.100
5.08	0.200



Available on Tap and Reel Packaging