



Low PIM Bulkhead N Female to N Female Adapter

TECHNICAL DATA SHEET

PE91179

Configuration

Connector 1	N Female
Impedance 1	50 Ohms
Connector 2	N Female
Impedance 2	50 Ohms
Adapter Design	Low PIM
Body Style	Straight
Mount Method	Bulkhead

Electrical Specifications

Frequency Range	DC to 6 GHz
Maximum VSWR	1.2:1
Maximum Passive Intermodulation (2 x 20 Watts), dBc	-160

Mechanical Specifications

Size

Length, in [mm]	1.4 [35.56]
Width/Dia., in [mm]	0.82 [20.83]
Color	Silver

Connector 1

Type	N Female
Inner Conductor Material and Plating	Beryllium Copper, Silver
Body Material and Plating	Brass, Tri-Metal
Dielectric Type	PTFE

Connector 2

Type	N Female
Inner Conductor Material and Plating	Beryllium Copper, Silver
Body Material and Plating	Brass, Tri-Metal
Dielectric Type	PTFE

Environmental Specifications

Temperature

Operating Range	-45 to +125 deg C
-----------------	-------------------

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Low PIM Bulkhead N Female to N Female Adapter PE91179](#)



Low PIM Bulkhead N Female to N Female Adapter

TECHNICAL DATA SHEET

PE91179

Plotted and Other Data

Notes:

- Values at +25 °C, sea level

Low PIM Bulkhead N Female to N Female Adapter from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Low PIM Bulkhead N Female to N Female Adapter PE91179](http://www.pasternack.com/n-female-n-female-straight-adapter-pe91179-p.aspx)

URL: <http://www.pasternack.com/n-female-n-female-straight-adapter-pe91179-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE91179 CAD Drawing

Low PIM Bulkhead N Female to N Female Adapter

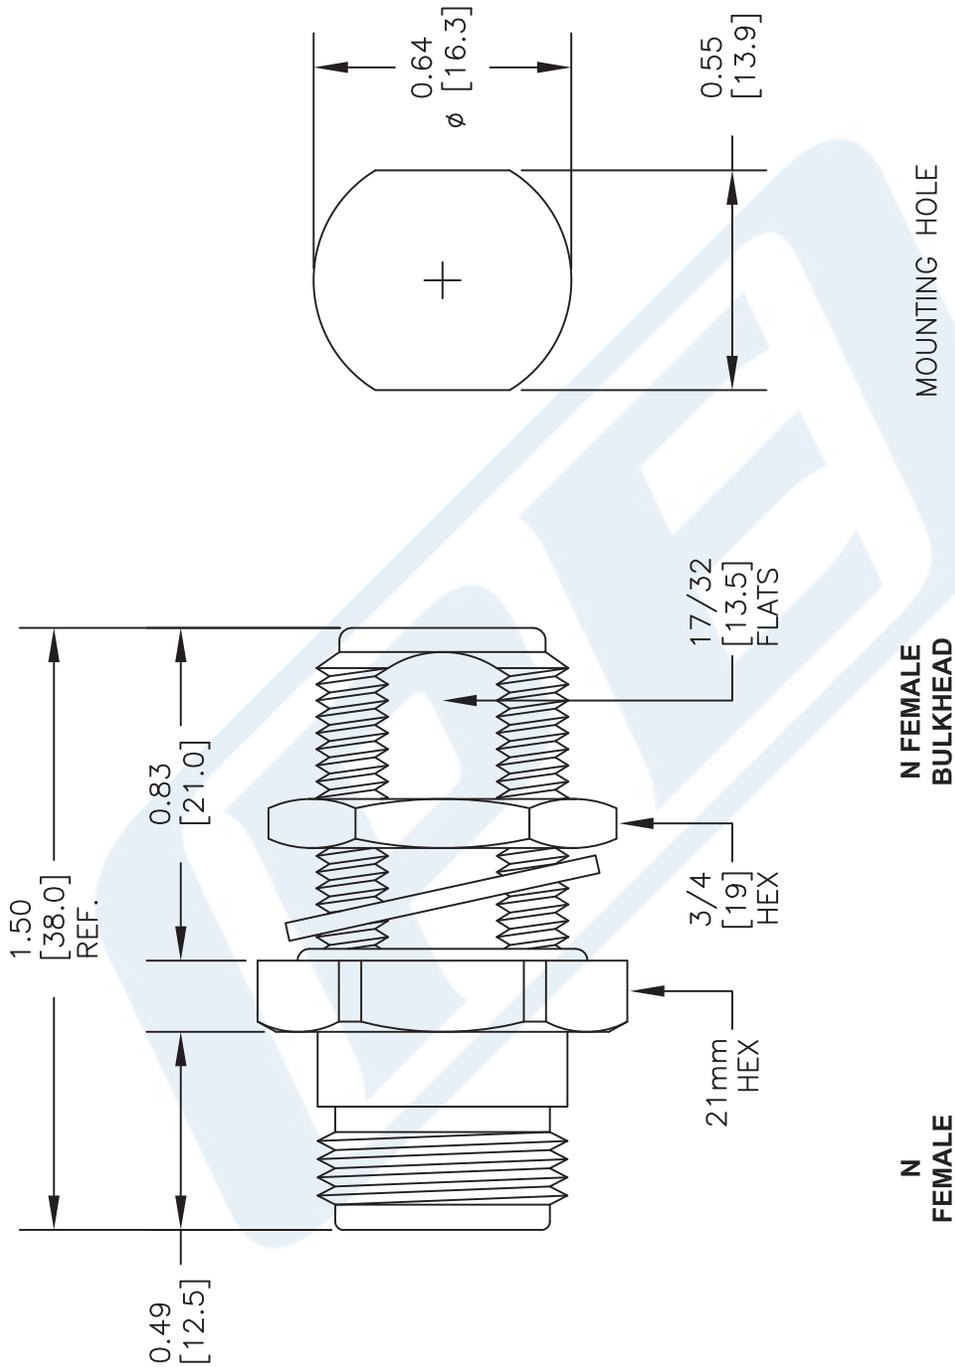

DWG TITLE

PE91179

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

(PE) PASTERNAK®
 THE ENGINEER'S RF SOURCE
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
 Phone: (949) 261-1920 | Fax: (949) 261-7451
 Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 071614

SCALE N/A

SIZE A

2233