
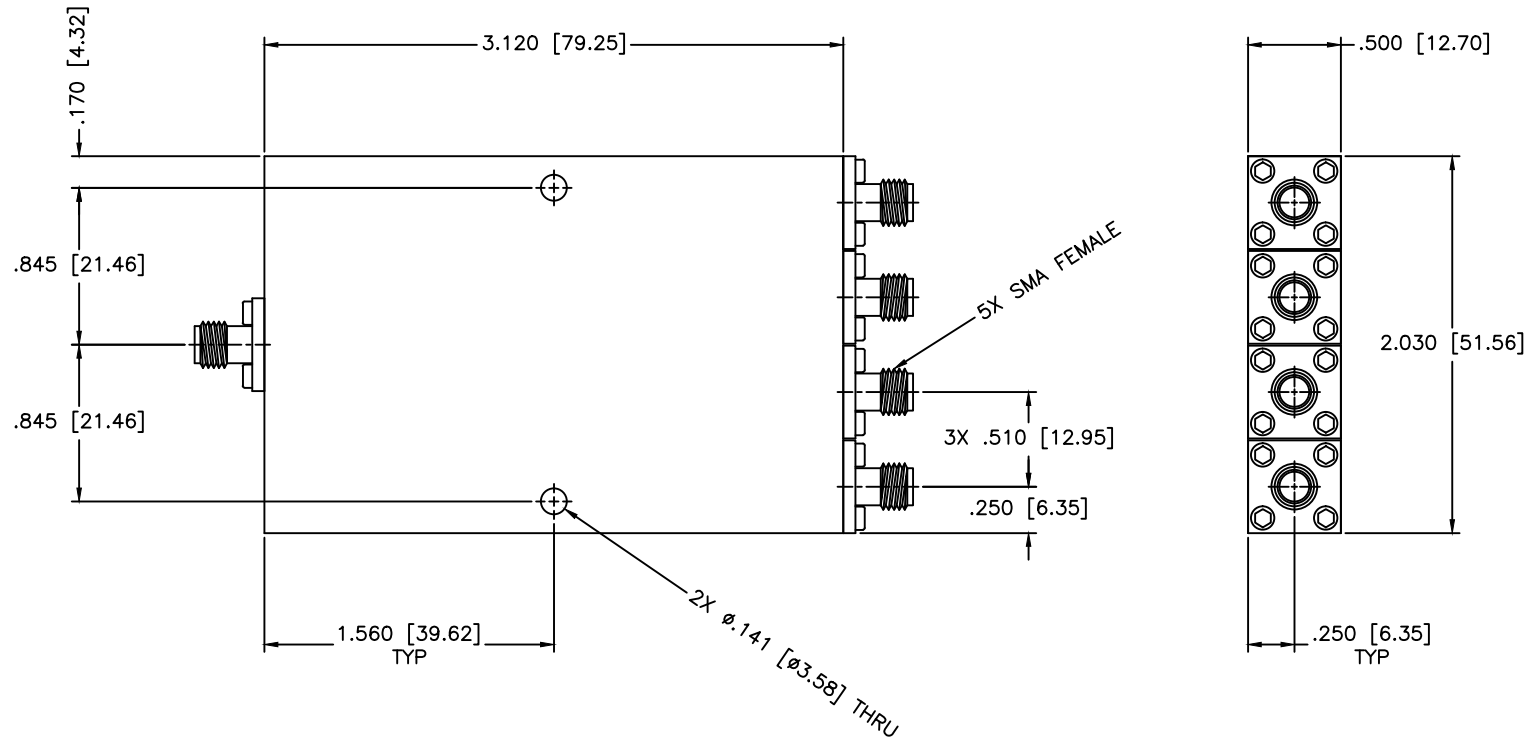


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED



SPECIFICATIONS

Frequency Range: 2–20 GHz
 Insertion Loss: 2.3dB Max.
 Isolation: 17dB Min.
 VSWR: 1.55:1 Max.
 Amplitude Balance: ± 0.6 dB Max.
 Phase Balance: ± 6 Deg. Max.
 Power: 20W Avg, 3kW Peak
 Operating Temperature: -32°C to $+85^{\circ}\text{C}$

MATERIAL: 		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^{\circ}$		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DATE: 06-17-2010		DRAWING TITLE: 4-WAY POWER DIVIDER
APPROVED: T. Nguyen		DATE: 06-17-2010		PART NO. PS4-137
CAGE CODE: OD2L5		SIZE: A	REV: A	DWG NO. 80847
THIRD ANGLE PROJECTION 		DO NOT SCALE THE DRAWING		