

SMC PLUG RG174 RG188 RG316

SC8801

SPECIFICATIONS

ELECTRICAL
FREQUENCY: 0-10 GHZ
IMPEDANCE: 50 OHMS




MECHANICAL
MATERIAL BODY: BRASS, Au PLATED, 3μ" MIN
CONTACTS: BeCu
CONTACT PLATING: Au PER MIL-G-45204
INSULATOR: TEFLON

INTERFACE: MIL-STD-348A


OPERATING TEMPERATURE: -65°C TO 165°C

ROHS COMPLIANT

CRIMP SIZE REQUIRED: .138"(3.5) HEX CRIMP TOOL

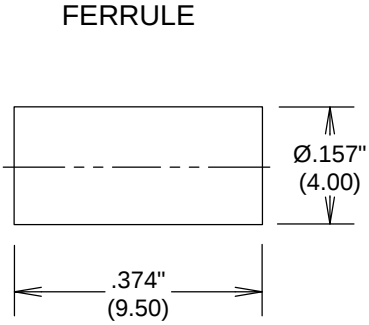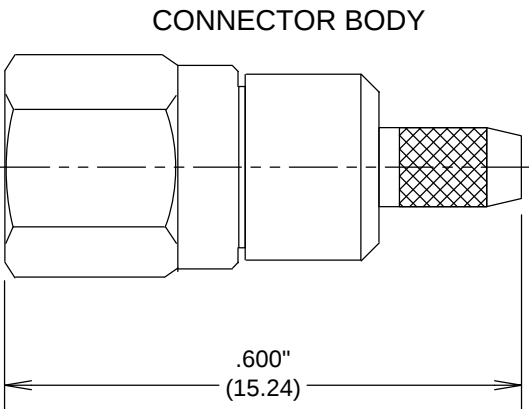

STRIPPING DIMENSIONS

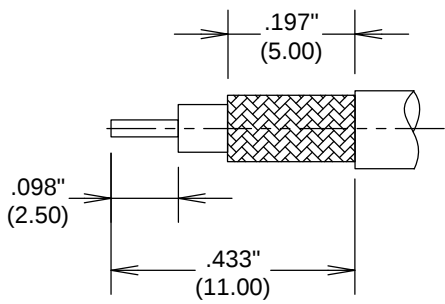

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

SMC PLUG RG174 RG188 RG316

SIZE

CAGE CODE

DWG NO

REV

ALL DIMENSIONS IN inches(MM) Typical

A

3FKR5

SC8801

--

SCALE

SHEET