


8 -Way L-Band Passive Splitter/Combiner

850 - 2150MHz

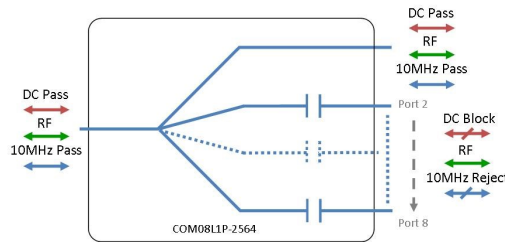

- 1 port 10MHz & DC pass
- All other ports 10MHz & DC blocked

Available with RF connector options:

- 50 Ω SMA
- 50 Ω N-type
- 50 Ω BNC
- 75 Ω BNC
- 75 Ω F-type.



850-2150 MHz
Operating frequency range. L-Band ready



Compact
Housed in rugged compact enclosure



Flexible Mounting
Tapped screw & through hole mounting options

RF Parameters					
COM08L1P-2564-XXXX	S5S5	N5N5	B5B5	B7B7	F7F7
Frequency Range	850 - 2150MHz				
RF Connectors	50 Ω SMA	50 Ω N-Type	50 Ω BNC	75 Ω BNC	75 Ω F-Type
Mean Insertion Loss (dB)	1.0 $\pm$ 0.5	1.0 $\pm$ 0.5	1.0 $\pm$ 0.5	1.0 $\pm$ 0.6	1.0 $\pm$ 0.6
Flatness $\pm$ (dB)	0.8	0.8	0.8	1.4	1.4
Input Return Loss (dB)	Typ.	12	12	12	8
	Min.	8	8	6	6
Output Return Loss (dB)	Typ.	14	14	14	9
	Min.	10	10	6	6
Isolation (dB)	Typ.	23	23	23	23
Amplitude Balance (dB)	$\leq$ 0.3	$\leq$ 0.3	$\leq$ 0.3	$\leq$ 0.5	$\leq$ 0.5
Phase Balance (Φ)	$\leq$ 1.5 $^\circ$	$\leq$ 1.5 $^\circ$	$\leq$ 1.5 $^\circ$	$\leq$ 2.5 $^\circ$	$\leq$ 2.5 $^\circ$
The given Insertion Loss specified is the loss above the theoretical limit for a lossless divider 10MHz Insertion Loss is up to 3dB above the theoretical loss* 10MHz Rejection is 20dB* *To ports which are applicable					

Broadcast



Marine Oil & Gas





SNG & VSAT



Satellite Teleport



Technical specifications and operating parameters

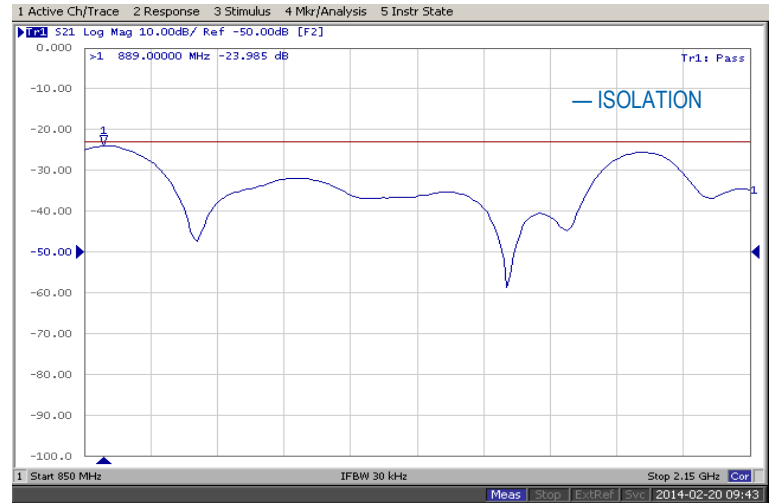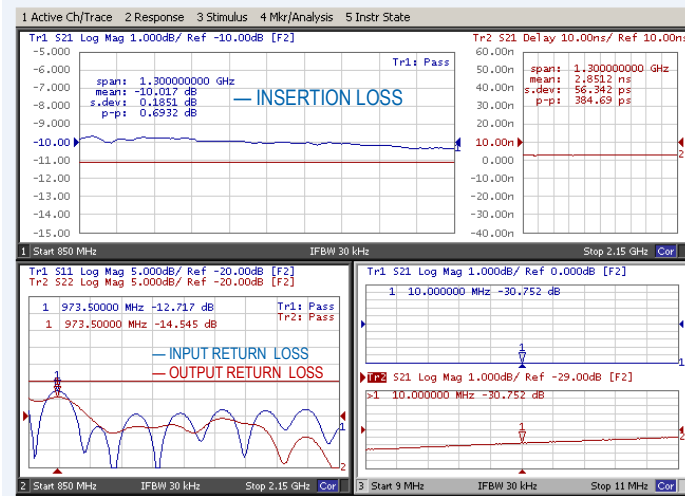


Environmental	
Operating Temperature	0°C to +45°C
Storage Temperature	-20°C to +75°C
Location	Indoor use Only
Humidity	Max. 85% non-condensing
Altitude	Max. 10,000 feet

Max Operating Parameters	
Input RF Power	+37 dBm (5W) as a splitter
Input RF Power	+33 dBm (2W) as a combiner
DC Voltage	35V on any RF port
DC Current	1A

! Operation beyond these limits may cause instantaneous and permanent damage.

Physical Dimensions (mm)

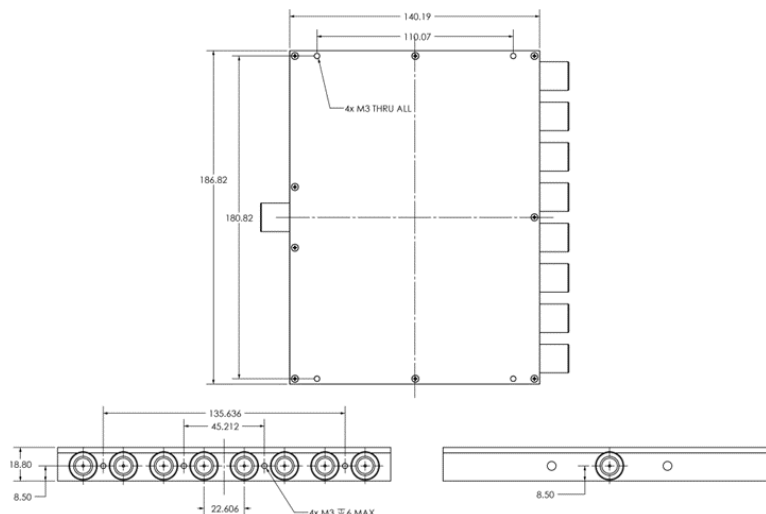

Note: The specification is subject to regular reviews and will be updated from time to time as part of our continuing product development and improved specification accuracy.