


THIS DRAWING HAS BEEN GENERATED BY A CAD SYSTEM. CHANGES SHALL ONLY BE INCORPORATED AS DIRECTED BY THE DESIGN ACTIVITY. DO NOT REVISE MANUALLY.

| REVISIONS |                 |      |          |          |
|-----------|-----------------|------|----------|----------|
| REV.      | DESCRIPTION     | ECO  | DATE     | APPROVED |
| 1         | INITIAL RELEASE | I.R. | 04/22/13 | P.T      |

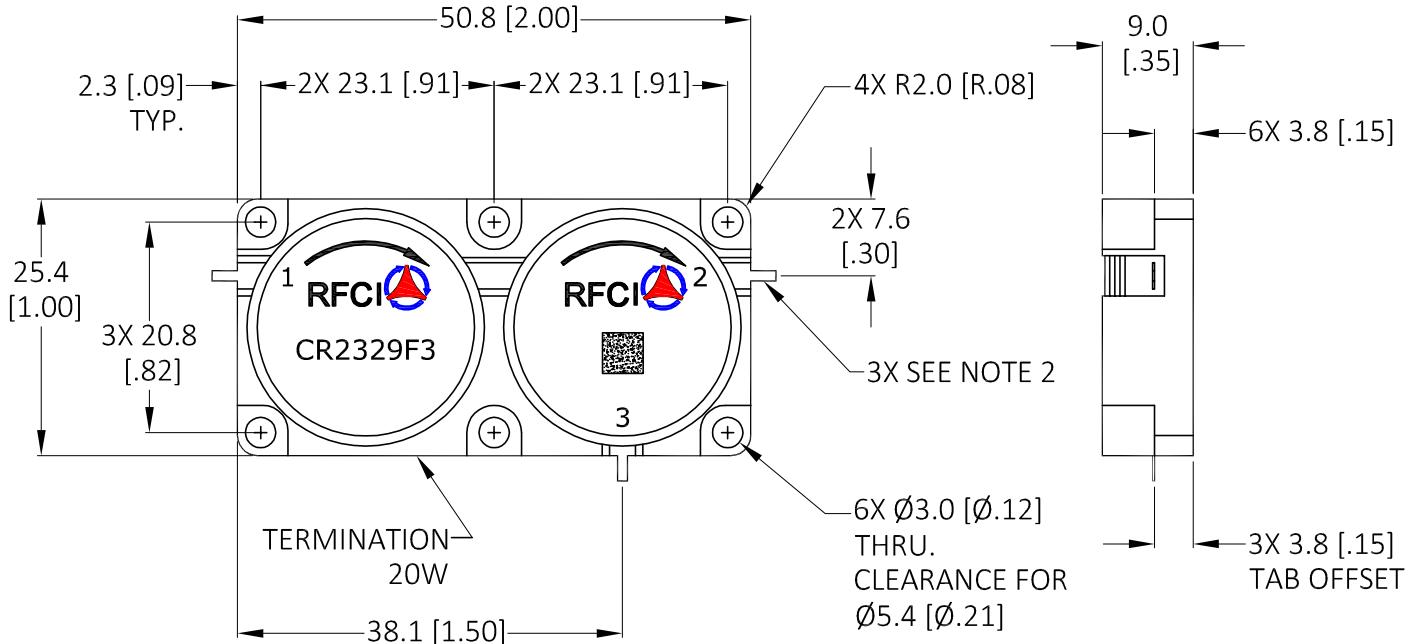

## Specifications

| Parameter                                   | Minimum | Typical | Maximum |
|---|---------|---------|---------|
| Frequency Range (MHz)                       | 900     |         | 930     |
| Insertion Loss (dB) P1-P2                   |         | < .40   | 0.60    |
| P2-P3                                       |         | < .20   | 0.30    |
| Isolation (dB) P2-P1                        | 45      | > 55    |         |
| P3-P2                                       | 22      | > 25    |         |
| Return Loss (dB)                            | 22      | > 25    |         |
| FWD IMD: 2T at 37W per T 5MHz Spacing (dBc) |         | 75      |         |

### NOTES:

1. Typical Values Represent Mid-Band Performance @ +23 °C.
2. Tab Dims: 1.00[.039]Width x 2.5[.10]Length x .20[.008]Thick.

## Power & Temperature Ratings

| Parameter             | Maximum        |
|-----------------------|----------------|
| Forward PWR Peak/Avg  | 1000/200 Watts |
| Reverse Power CW      | 200 Watts      |
| Operating Temperature | -40 to +85° C  |
| Storage Temperature   | -40 to +95° C  |

## CW DUAL CIRCULATOR MODEL: CR2329F3

|  |          |                        |  |                  |  |              |  |
|--|----------|------------------------|--|------------------|--|--------------|--|
| UNLESS OTHERWISE SPECIFIED<br>ALL DIMENSIONS ARE IN MILLIMETERS [INCHES]:  |          | THIRD ANGLE PROJECTION |  | APPROVALS        |  | DATE         |  |
| TOLERANCES ARE:<br>1 PLACE DECIMAL $\pm .2$ [.01]    2 PLACE DECIMAL $\pm .10$ [.004]<br>ANGULAR: $\pm 1.0^\circ$ SURFACE ROUGHNESS 16/  |          |                        |  | DRAWN BY: HV     |  | 04/19/13     |  |
| REMOVE ALL BURRS AND BREAK SHARP EDGES.<br>SURFACE TEXTURE TO BE IN ACCORDANCE WITH LATEST ANSI B46.1<br>DIMENSIONING & TOLERANCING IN ACCORDANCE WITH LATEST ANSI Y14.5   |          |                        |  | CHECKED BY: P.T  |  | 04/20/13     |  |
| PROPRIETARY NOTE: "THE INFORMATION CONTAINED ON THIS DOCUMENT IS CONSIDERED TO BE CONFIDENTIAL MATERIAL PROPRIETARY TO RF CIRCULATOR ISOLATOR Inc. (RFCI) AND IS PROVIDED SOLELY FOR INFORMATION PURPOSES. THIS INFORMATION SHALL NOT BE USED BY ANYONE OTHER THAN RFI TO DESIGN OR CONSTRUCT ANY OF THE ITEMS DEPICTED, NOR SHALL IT BE DISCLOSED, DUPLICATED, OR COPIED FOR ANY PURPOSE, NOR MADE AVAILABLE TO ANY THIRD PARTY WITHOUT THE PRIOR WRITTEN CONSENT OF A RFI OFFICIAL." |          |                        |  | DESIGN BY: P.T   |  | 04/01/13     |  |
|  |          |                        |  | ENGINEER BY: P.T |  | 04/01/13     |  |
|  |          |                        |  | MFG. ENGR. L.T   |  | 4/21/13      |  |
|  |          |                        |  | Q.A.             |  |              |  |
|  |          |                        |  | PROG. MGMT/MKT   |  |              |  |
| DO NOT SCALE DRAWING   |          |                        |  | SCALE: FULL      |  | SHEET 1 OF 1 |  |
| SIZE   | CAGE NO. | DWG NO.                |  | REV.             |  |              |  |
| A  |          | CR2329F3-OS            |  | 1                |  |              |  |

**RFCI**

**OUTLINE/SPECS**